



ABOUT SureWerx

BE SMART. BE SAFE. BE SURE.

Co-headquartered in Vancouver, British Columbia, and Elgin Illinois, SureWerx™ is a leading supplier of professional tool, equipment and safety products for workers. SureWerx markets its products in Canada under the JET®, Strongarm®, ITC®, STARTECH®, Pioneer®, Ranpro®, PeakWorks®, Jackson®, Wilson®, Curv-O-Mark®, Due North® and Sellstrom® brands, and in the United States under the American Forge & Foundry®, Pioneer®, PeakWorks®, Jackson®, Wilson®, Curv-O-Mark®, Due North®, Geroline/K1 and Sellstrom® brands. And now in Europe under our Jackson®, Sellstrom®, Due North®, Geroline/ K1, Balder® and Curv-O-Mark® brands, SureWerx™ offers unparalleled access to its brands through its partner distributor network servicing the industrial, construction, safety, and automotive aftermarket in North America and Europe.

www.surewerx.com









































"We want all of our distributor partners and the end users of our products to experience tangible value for the products and services we offer and we will continue to enhance that proposition vastly over the coming years"

- A message from our CEO, Chris Baby

Building a tool & equipment business

1957–2000

- AcquiresPioneer
- Acquires PeakWorks
- Acquires Sellstrom
- Acquires Ranpro
- Establishes STARTECH
- Acquires KP Industries

2009-today

2009

2014

2015

2016

OUR COMMITMENT TO THIS REGION

To bring a range of feature rich PPE products and services to our distributor partners in the industrial, automotive, safety, medical and food markets.

As we only sell our own brands we control the appropriate certification of the products and the quality of the manufacture.

Our new catalogue includes new 'exclusive' products in the following categories:

- PAPR systems
- Welding helmets
- Auto Darkening Filters
- Welding blankets and curtains
- Tools
- Arc flash protection
- Head, face and eye protection
- Safety wear
- Knee and elbow protection
- Slip protection

OUR FUTURE COMMITMENT TO THE REGION

- Continue to bring new 'exclusive' certified products to the markets.
- Invest in the systems, processes and people to deliver the best customers experience.
- Invest in your businesses with training and Marketing support.

EMEA

Europe, Middle East and Africa



sellstrom.















www.jacksonsafety.eu

"Our acquisition of Jackson Safety provided us with a platform in Europe on which we intend to build a comprehensive health, safety and productivity focused business. We have a successful track record in achieving this goal in other regions and will draw on that legacy to deliver the best customer experience in Europe. Our investment is already considerable and this catalogue reflects our commitment to delivering the right products to the worker to ensure they are totally confident of their health and safety and can concentrate on their productivity and delivering their best work."



A message from Clive ShepherdGM/VP - EMEA Region

- Acquires Jackson Safety
- AcquiresWilson Brands
- AcquiresADA Solutions
- AcquiresDue North
- Acquires Geroline

- Acquires Footwear Specialties International (FSI)
- Acquires MegaComfort
- AcquiresNeos Overshoe
- AcquiresOberon

2018

2019

2020

2022

YOUR BEST WORK YET •• NEEDS YOUR TOTAL FOCUS

The safety and productivity of every professional worker is our goal. Our mission is to design products that deliver on this goal. We are always finding better ways help increase worker productivity and safety.



Every day 100's of professional workers are injured at work - industrial accidents are avoidable.



Our goal is to ensure that you return home, after a safe and productive day at work, in the same healthy condition as you went to work.



Legislation and regulation continue to increase safety at work and all of our products will meet or exceed the necessary levels.



We also work to ensure that all of our distributors receive product knowledge training to ensure they provide the right product for the right application. We are committed to understanding the needs of the professional end users.




When workers are confident that their PPE is designed with their health and safety in mind they can concentrate on the job at hand, achieving maximum productivity.

ACCIDENTS INJURIES RISK







Finding a better way





YOUR BEST WORK YET

NEEDS THE RIGHT PRODUCT FOR THE RIGHT APPLICATION

| 12 | RESPIRATORY |
|----|-------------|
| 12 | PROTECTION |

WELDING PROTECTION

80 TOOLS

ARC FLASH PROTECTION

90 EYE & FACE PROTECTION

110 SAFETY WEAR

120 GENERAL PPE



| | | Page |
|-------------|-------------------------|---------|
| | PAPR Welding | 16-27 |
| | PAPR Face Shield | 28-33 |
| | PAPR Soft Hood | 34-35 |
| | Welding Helmets | 44-69 |
| | Welding Filters | 70-75 |
| | Welding Blankets | 76-77 |
| | Welding Curtains | 78-79 |
| | Curv-O-Mark | 80-85 |
| > | Arc Flash Protection | 88-89 |
| | Face Shields | 92-99 |
| | Goggles | 100-104 |
| | Glasses | 105-109 |
| | Disposables | 112-118 |
| | Hi-Vis | 119 |
| | Headlamps | 122-123 |
| | Hearing Protection | 124-125 |
| | Knee & Elbow Protection | 126-129 |
| | Slip Protection | 130-131 |
| | Product Index | 134-137 |
| | Warranty Table | 138 |
| | | |

MARKET FOCUS

INDUSTRIAL

CONSTRUCTION

METAL FABRICATION

AUTOMOTIVE

AGRICULTURE

FOOD PROCESSING

MEDICAL





































































































THERE ARE 3 CATEGORIES OF PPE



MINOR RISKS

Minimal risks with quickly disappearing side effects. No permanent health risks.

Marking:

CE UK

European/UK conformity



CONSIDERABLE RISKS

Potentially irreversible health risks, but not lethal. Not part of Cat. I. or Cat. III.

Marking:

CE EK

European/UK conformity



HIGH & LETHAL RISKS

Risks that may cause very serious consequences such as death or irreversible damage to health.

Marking:




European/UK conformity

'xxxx' - Identification number of the body involved in assessment of production control (module C2) or quality assurance (module D) system

JACKSON® SAFETY

WELDING PROTECTION

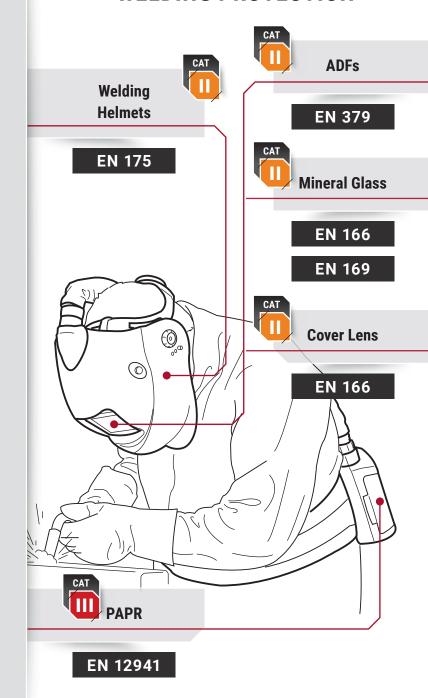


EN 166 - Personal eye protection, EN 169 - Welding filters, EN 170 - Ultraviolet filters, EN 171 - Infrared filters, EN 172 - Sunglare filters, EN 175 - Welding helmets, EN 352-2 - Hearing protectors - Ear plugs, EN 379 - Automatic welding filters, EN 397 - Industrial Safety Helmets - Hard hats, EN 12941 - Respiratory protectors - PAPR (Powered Air Purifying Respirator), EN 13034 - Protective clothing - liquid chemicals, EN ISO 13688 - Protective clothing - General requirements, EN 13982 - Protective clothing - Solid particulates, EN 14116 - Protective clothing - Flame spread resistant, EN 14126 - Protective clothing - Infective agents, EN 14404 - Knee protectors, EN 14605 - Protective clothing - Liquid chemicals, EN ISO 20471 - High visibility clothing, EN 50365 - Electrically insulating helmets (for use on low voltage installations), EN 1073-2 - Protective clothing - Radioactive contamination, EN 1149-5 - Protective clothing - Electrostatic properties, GS-ET-29 - Face shields for electrical work, IEC 61482-2 - Protective Clothing against Thermal Arc Hazards of an Electric Arc




PPE REGULATION • • •

ARC FLASH PROTECTION

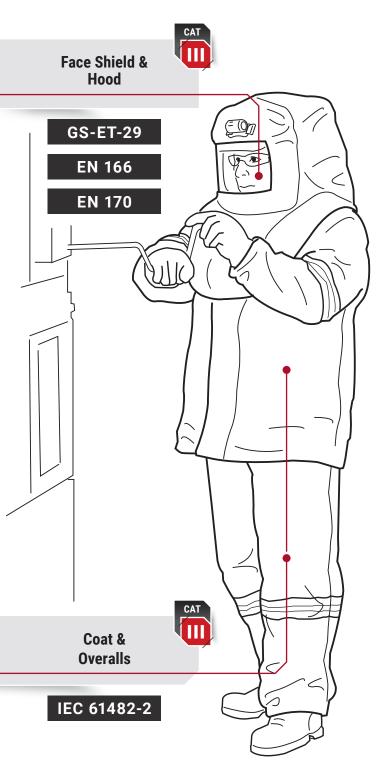



EYE & FACE PROTECTION

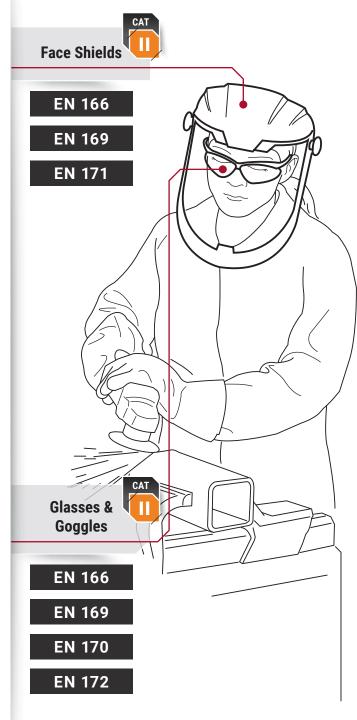

EN 166 - Personal eye protection, EN 169 - Welding filters, EN 170 - Ultraviolet filters, EN 171 - Infrared filters, EN 172 - Sunglare filters, EN 175 - Welding helmets, EN 352-2 - Hearing protectors - Ear plugs, EN 379 - Automatic welding filters, EN 397 - Industrial Safety Helmets - Hard hats, EN 12941 - Respiratory protectors - PAPR (Powered Air Purifying Respirator), EN 13034 - Protective clothing - liquid chemicals, EN ISO 13688 - Protective clothing - General requirements, EN 13982 - Protective clothing - Solid particulates, EN 14116 - Protective clothing - Flame spread resistant, EN 14126 - Protective clothing - Infective agents, EN 14404 - Knee protectors, EN 14605 - Protective clothing - Liquid chemicals, EN ISO 20471 - High visibility clothing, EN 50365 - Electrically insulating helmets (for use on low voltage installations), EN 1073-2 - Protective clothing - Radioactive contamination, EN 1149-5 - Protective clothing - Electrostatic properties, GS-ET-29 - Face shields for electrical work, IEC 61482-2 - Protective Clothing against Thermal Arc Hazards of an Electric Arc

JACKSON[®]

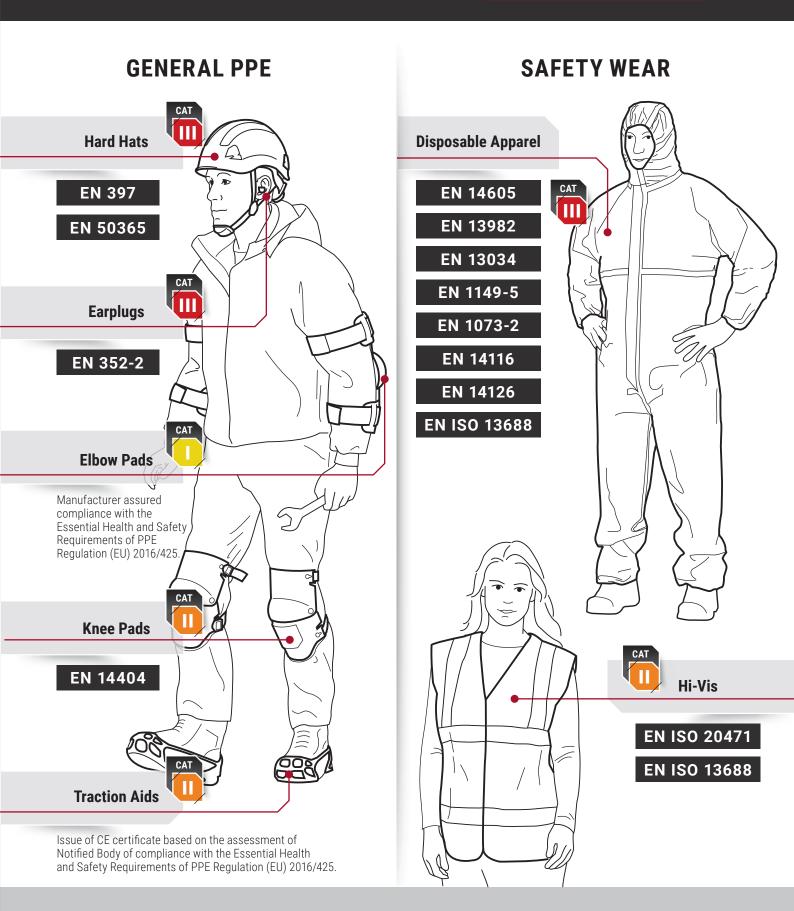

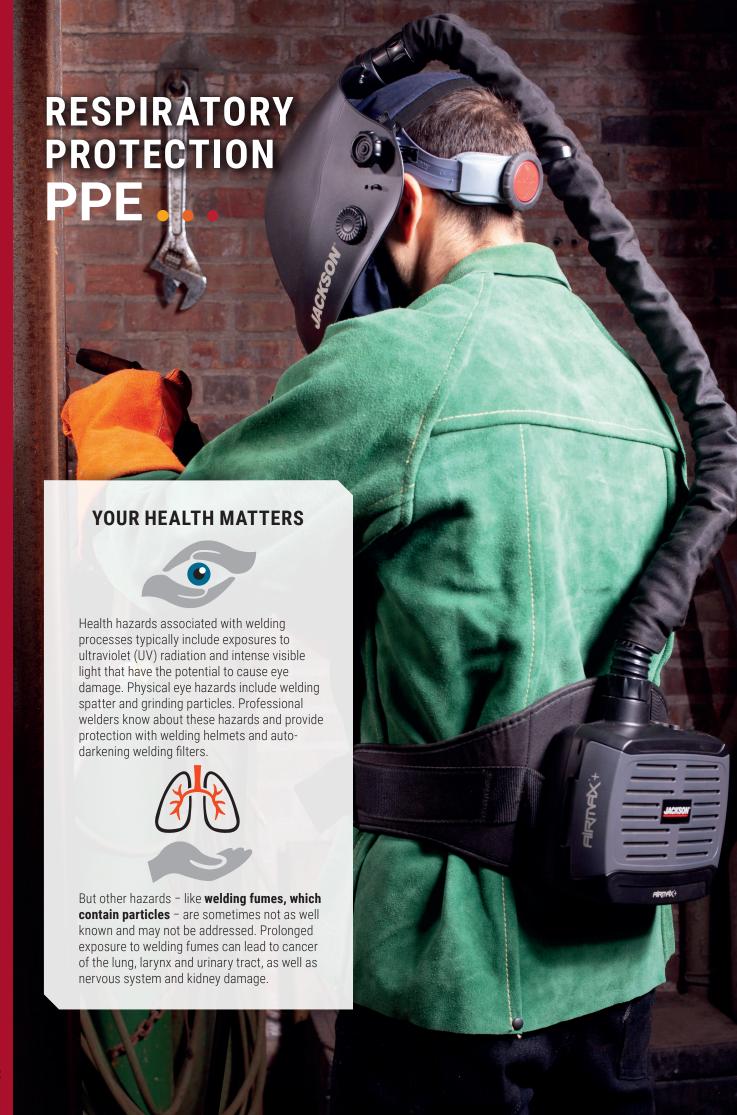

REDUCE EXPOSURE TO HAZARDS

Understand the risks

Identify the hazard - metal fumes, gases, vapours, mist, dust. The selection of respiratory protection should be the result of the *risk assessment* conducted by a professional health and safety officer.

Maintain clean surfaces

Welding surfaces should be cleaned of any coating that could potentially result in toxic exposure levels.

Avoid breathing fume and gases

Position yourself to avoid breathing fume and gas, for example, stay upwind of welding fumes when working in open or outdoor areas. Be aware that welding outdoors or in open work environments does not guarantee safe ventilation.

Use general or local ventilation

PAPR is not suitable for work in poorly ventilated areas where oxygen level is suspected to be below 17%.

Ventilation can reduce fume and gas levels in the work area and remove fume and gases from the welder's breathing zone.

Wear respiratory protection

Chose the right respiratory protection and reduce exposures to safe levels.

PROTECTION CLASSIFICATION

| TH1 | TH2 | ТН3 |
|-------------------------------|------------------------|--------------------------|
| inward leakage max. 10% | inward leakage max. 2% | inward leakage max. 0.2% |
| NPF = 10 | NPF = 50 | NPF = 500 |

NPF - Nominal Protection Factor

Based on EN 12941

Awareness is the first step in controlling hazards. Investing in the right personal protective equipment creates a healthier, safer and more productive workplace.



Metal fumes



Fine, airborne particles from metal generated by condensation of vaporized material at high temperatures.

Gases



A normally formless fluid, often odourless and invisible, can spread freely and quickly through the air.

Vapours



Gases formed when solids or liquids evaporate at room temperatures.

Mist



Tiny liquid droplets generated by condensation or by breaking up a liquid into the dispersed state, in processes such as spraying.

Dust



Particulate matter formed when solid matter is broken down into fine, airbourne particles. In welding about 95% is particle filtration.



Finding a better way



JACKSON®

PAPR SYSTEMS

GOOD

BETTER

BEST



WH25 DUO

280 **SERIES** **TRANSLIGHT** 355

TRANSLIGHT FLIP 455

TRANSLIGHT+ 555











TH3

TH3

TH3

TH3

TH3







AIRMAX+



AIRMAX+



AIRMAX+



AIRMAX+

























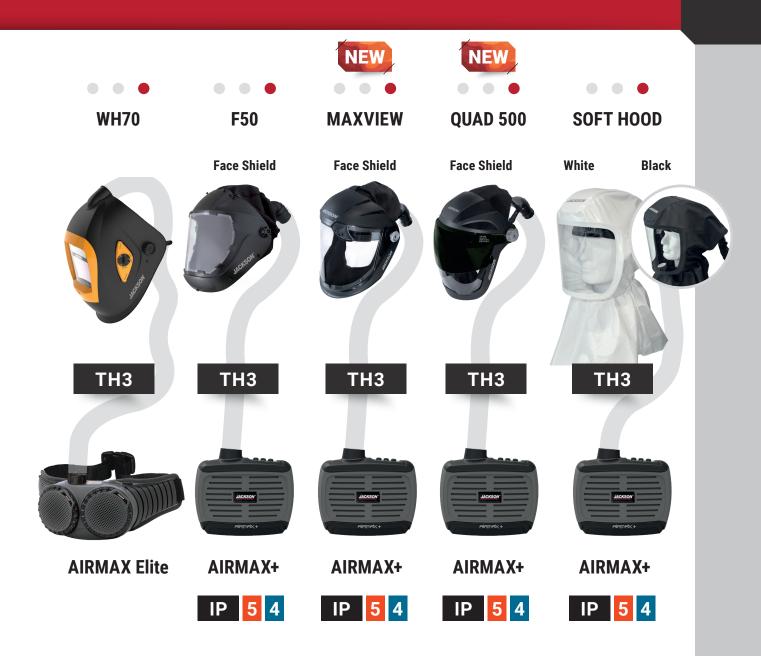




AIRMAX® with DUO

PAPR System with Welding Helmet

Unit contains battery charger, battery, waist belt, hose, HEPA Filter, Pre-Filter and PAPR welding helmet with ADF (odour removing filter sold separately)



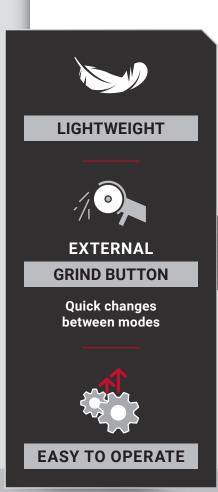



Particle Protection

Airflow

Charging time

Operation time

TH3

170 - 210 lpm

5 hrs

9 hrs



- **TH3 P R SL** best in class (see table opposite)
- Air flow: 170 to 210 lpm
- Audible Filter Alarms to inform when filters need changing or low battery
- Operation time up to **9 hours**
- *Light weight 990g* (blower unit, battery and filter)
- P3 filter with increased surface area
- Easy to operate
- Replaceable and rechargeable 4 cell Li-ion battery 7.4V/5200mAh. Charging time: 5 hours
- Replacement filter available
- Fitted with *flame retardant supporting belt* and *hose cover* for prolonged operational time
- Noise level 75dBA
- Unit is CE Certified

- Optical classes 1/1/1/2
- 110 x 90 mm cartridge size, 92 x 41 mm viewing area
- Shade range 9-13, sensitivity and delay adjustment, grinding mode
- External shade adjustment
- Positive click mode to grind
- ADF warranty: 1 year





- GTAW -



MMA









UK CA 8503

More details about the WH25 DUO welding helmet on page 48.

EN 12941:1998+A1:2003+A2:2008 TH3 P R SL

AIRMAX PAPR SYSTEM

| Product No | Description | Case Qty/MOQ |
|------------|--|--------------|
| J7050 | AIRMAX PAPR System with Duo Welding Helmet 4/9-13 ADF - Single Speed | 4 |

SPARE PARTS & ACCESSORIES

| Product No | Description | Case Qty/MOQ |
|------------|--|--------------|
| J7051 | WH25 DUO PAPR Welding Helmet with 4/9-13 ADF | 1 |
| J7063 | AIRMAX Welding PAPR FR Hose & Cover | 1 |
| J5241 | AIRMAX Welding PAPR FR Hose Cover | 1 |
| J7065 | AIRMAX Welding PAPR Motor | 1 |
| J7210 | AIRMAX Welding P3 PAPR Filter | 6 |
| J7067 | AIRMAX Welding PAPR Charger | 1 |
| J7068 | AIRMAX Welding PAPR 4C Battery | 1 |
| J7069 | AIRMAX Welding PAPR Waist Belt | 1 |
| 40391 | PAPR Carrying Bag - optional extra | 1 |
| J7061 | DUO PAPR Face Seal | 1 |






AIRMAX*+ with 280 SERIES

PAPR System with Welding Helmet

Unit contains battery charger, battery, waist belt, hose, HEPA Filter, Pre-Filter and PAPR welding helmet (odour removing filter sold separately)



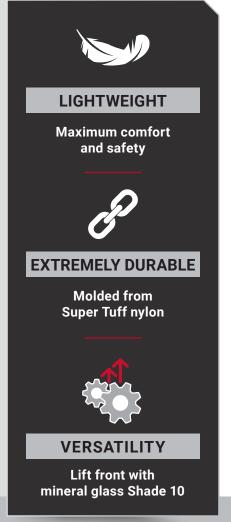





Particle Protection

Adjustable airflow

Charging time

Operation time

Ingress Protection

TH3

170 - 240 lpm

5 hrs

10 hrs

ID

5



A / Eine / Une Marque / Una Marca / Un Marchio



- **TH3** Particle Protection (Highest Possible Rating)
- **8 different** blower speed settings, adjustable airflow from 170 to 240 lpm **(10 lpm Increment)**
- IP 54 Certified
- **Vibration** and **Filter Alarms** to inform when filters need changing or low battery
- Comes with **HD 4 Cell Li-ion Battery 7.4V/5200mAh**. Charging time: 5 hours
- Operation time up to 10 hours with a new filter P R SL and airflow 170 l/min
- In combination with 280 Series 'Bucket style' welding helmet
- Unit is CE Certified

- 280 Series welding helmet has been an industry leader for decades
- Made in the USA, the 280 Series is a traditional bucket style welding helmet
- Molded from **Super Tuff nylon** lighter than fiberglass and extremely durable
- Patented Sel-Snap lens retention system provides easy loading of filter, cover and protective plates
- Lift front comes standard with spring loaded positive lock feature
- Our proprietary SUPER KOOL SILVER COATING keeps the helmet 30% cooler than standard helmets and sheds spatter without burning
- Provides maximum operator comfort and safety
- Sellstrom's patented "quick-release" ratchet headgear suspension with sweatband included
- Specially designed shape for use with cartridge respirators







EN 12941 TH3 P R SL





TIG - GTAW -

MMA - SMAW -

. .

More details about the 280 Series welding helmet on page 44.



AIRMAX+ with 280 SERIES PAPR SYSTEM

| Product No | Description | Case Qty/MOQ |
|------------|---|--------------|
| 40421 | AIRMAX+ PAPR with 280 Series Welding Helmet | 4 |

SPARE PARTS & ACCESSORIES

| Product No | Description | Case Qty/MOQ |
|------------|---|--------------|
| 40340 | FR Hose with cover, 85 cm | 1 |
| J5241 | FR Hose cover, 105 cm | 1 |
| 40381 | AIRMAX+ Blower unit - 8 Speed | 1 |
| 40332 | HEPA PAPR filter | 6 |
| 40363 | PAPR charger | 1 |
| 40353 | Replacement 4-Cell 7.4V Battery | 1 |
| 40371 | Replacement Waist belt | 1 |
| 40311 | Replacement Pre-filters | 10 |
| 40312 | Odour removing filter | 10 |
| 47421 | 280 Series PAPR Complete Head Top (No hose) | 1 |
| J7260 | PAPR Headgear | 5 |
| 40313 | Spark arrestor | 5 |
| J5250 | Face Seal | 5 |
| 40391 | PAPR Carrying Bag | 1 |




AIRMAX®+ with TRANSLIGHT™ 355

PAPR System with Welding Helmet

Unit contains battery charger, battery, waist belt, hose, HEPA Filter, Pre-Filter and PAPR welding helmet with ADF (odour removing filter sold separately)



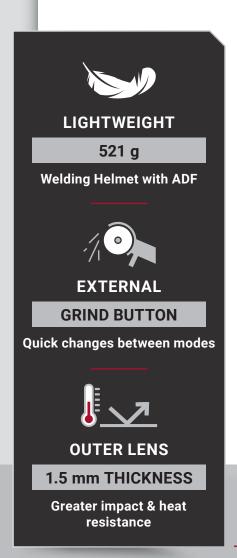





Particle Protection

Adjustable airflow

SPEED DIAL

Charging time

Operation time

Ingress Protection

TH3

170 - 240 lpm

5 hrs

10 hrs

IΡ





SERIES



- **TH3** Particle Protection (Highest Possible Rating)
- 8 different blower speed settings, adjustable airflow from 170 to 240 lpm (10 lpm Increment)
- IP 54 Certified
- Vibration and Filter Alarms to inform when filters need changing or low battery
- Comes with HD 4 Cell Li-ion Battery 7.4V/5200mAh. Charging time: 5 hours
- Operation time up to 10 hours with a new filter P R SL and airflow 170 I/min
- In combination with Translight 355 welding helmet featuring ultra slim true color ADF with external mode control
- Unit is CE Certified

- Translight 355 Series is super-lightweight with a sleek, modern design and look
- Auto Darkening Filter meets 1/1/1/1 Optical Clarity **Standard**, the highest in the industry
- ADF contains external grind button for quick changes between modes
- Welding, Grinding, Cutting modes included
- Includes patented 370 Speed Dial ratcheting headgear system
- Switching speeds of 0.25 ms
- Solar & Lithium Batteries (CR2032)
- 4 sensor technology for optimal performance
- Outer lens at 1.5 mm thickness



AIRMAX+ with TRANSLIGHT 355 PAPR SYSTEM











GTAW -

- GMAW

More details about the Translight 355 welding helmet on page 54.



EN 12941 TH3 P R SL

| Case Qty/MOQ |
|--------------|

Product No Description 40040 AIRMAX+ PAPR with Translight 355 Welding Helmet

SPARE PARTS & ACCESSORIES

| Description | Case Qty/MOQ |
|---|--|
| FR Hose with cover, 105 cm | 1 |
| FR Hose cover, 105 cm | 1 |
| AIRMAX+ Blower unit - 8 Speed | 1 |
| HEPA PAPR filter | 6 |
| PAPR charger | 1 |
| Replacement 4-Cell 7.4V Battery | 1 |
| Replacement Waist belt | 1 |
| Replacement Pre-filters | 10 |
| Odour removing filter | 10 |
| Spark arrestor | 5 |
| Translight 355 shell with Face Seal and Airduct | 1 |
| Translight 355 PAPR Face Seal | 1 |
| PAPR Carrying Bag | 1 |
| 370 sweat band | 2 |
| | FR Hose with cover, 105 cm FR Hose cover, 105 cm AIRMAX+ Blower unit - 8 Speed HEPA PAPR filter PAPR charger Replacement 4-Cell 7.4V Battery Replacement Waist belt Replacement Pre-filters Odour removing filter Spark arrestor Translight 355 shell with Face Seal and Airduct Translight 355 PAPR Face Seal PAPR Carrying Bag |



AIRMAX[®]+ with TRANSLIGHT™ FLIP 455

PAPR System with Welding Helmet

Unit contains battery charger, battery, waist belt, hose, HEPA Filter, Pre-Filter and PAPR welding helmet with ADF (odour removing filter sold separately)







TH3

- **TH3** Particle Protection (Highest Possible Rating)
- 8 different blower speed settings, adjustable airflow from 170 to 240 lpm (10 lpm Increment)
- IP 54 Certified
- Vibration and Filter Alarms to inform when filters need changing or low battery
- Comes with HD 4 Cell Li-ion Battery **7.4V/5200mAh**. Charging time: 5 hours
- Operation time up to 10 hours with a new filter P R SL and airflow 170 l/min
- Breathing hose with flame retardant cover protection from sparks and spatter
- Large controls Easy to use with oversized gloves
- In combination with Translight 455 welding helmet - Easy-to-use lift mechanism reveals a 297 sq. cm clear extra-large polycarbonate face shield for grinding operations
- Unit is CE Certified

- Flip system ensures maximum safety provides uninterrupted face protection when switching from welding to grinding operations
- High quality True Color ADF provides a full 60 **square cm** viewing area
- Features an extra-large face shield which provides superior peripheral vision
- Welding, grinding, cutting modes functions are standard features
- 4 sensor technology for optimal performance
- Auto-darkening filter meets 1/1/1/1 optical clarity standard, the highest in the industry
- Includes patented 370 Speed Dial ratcheting headgear system
- Switching speeds of 0.1 ms
- Welding helmet with Mineral glass Shade 10 available as custom order















TIG GTAW -> 5 Amp

SMAW

- GMAW

GRINDING

More details about the Translight Flip 455 welding helmet on page 56.

EN 12941 TH3 P R SL



AIRMAX+ with TRANSLIGHT FLIP 455 PAPR SYSTEM

| Product No | Description | Case Qty/MOQ |
|------------|--|--------------|
| 40041 | AIRMAX+ PAPR with Translight Flip 455 Welding Helmet | 4 |

SPARE PARTS & ACCESSORIES

| Product No | Description | Case Qty/MOQ |
|------------|--|--------------|
| 40341 | FR Hose with cover, 105 cm | 1 |
| J5241 | FR Hose cover, 105 cm | 1 |
| 40381 | AIRMAX+ Blower unit - 8 Speed | 1 |
| 40332 | HEPA PAPR filter | 6 |
| 40363 | PAPR charger | 1 |
| 40353 | Replacement 4-Cell 7.4V Battery | 1 |
| 40371 | Replacement Waist belt | 1 |
| 40311 | Replacement Pre-filters | 10 |
| 40312 | Odour removing filter | 10 |
| 40313 | Spark arrestor | 5 |
| 40101 | Translight Flip 455 shell with Face Seal and Airduct | 1 |
| 40201 | Translight Flip 455 PAPR Face Seal | 1 |
| 40391 | PAPR Carrying Bag | 1 |
| J5237 | 370 sweat band | 2 |

23




AIRMAX®+ with TRANSLIGHT™+ 555

PAPR System with Welding Helmet

Unit contains battery charger, battery, waist belt, hose, HEPA Filter, Pre-Filter and PAPR welding helmet with ADF (odour removing filter sold separately)





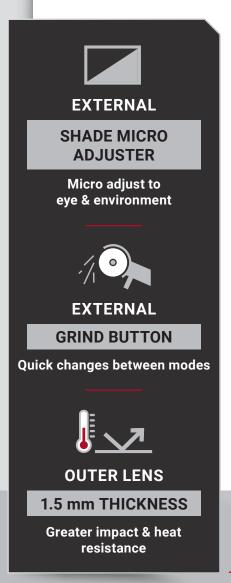





Particle Protection

Adjustable airflow

SPEED DIAL

Charging time

Operation time

Ingress Protection

TH3

170 - 240 lpm

5 hrs

10 hrs

IΡ

TRANSLIGHT



SERIES



- **TH3** Particle Protection (Highest Possible Rating)
- 8 different blower speed settings, adjustable airflow from 170 to 240 lpm (10 lpm Increment)
- IP 54 Certified
- Vibration and Filter Alarms to inform when filters need changing or low battery
- Comes with HD 4 Cell Li-ion Battery 7.4V/5200mAh. Charging time: 5 hours
- Operation time up to 10 hours with a new filter P R SL and airflow 170 I/min
- In combination with Translight 555 welding helmet featuring extra large 98 x 82 mm viewing area and innovative external adjuster
- Unit is CE Certified

- Translight™ shell has a sleek modern design
- Helmet is lightweight & ergonomically balanced to reduce stress & fatigue
- Auto Darkening Filter meets 1/1/1/1 Optical Clarity standard, the highest in the industry
- Includes an external grind button, so end users can switch modes with ease
- Features the new external shade adjuster to help aid in visual focus
- The new shade adjuster can finely tune shades up to +/- 1 full shade with .2 shade adjusting increments
- Welding, Grinding and Cutting can be done with this versatile ADF
- Includes patented 370 Speed Dial ratcheting headgear system
- · Advanced digital controls are a great QOL enhancement for welders
- Switching speeds of 0.2 ms









PWA SMAW







More details about the Translight+ 555 welding helmet on page 58.

EN 12941 TH3 P R SL



AIRMAX+ with TRANSLIGHT+ 555 PLUS PAPR SYSTEM

| Product No | Description | Case Qty/MOQ |
|------------|--|--------------|
| 40043 | AIRMAX+ PAPR with Translight+ 555 Welding Helmet | 4 |

SPARE PARTS & ACCESSORIES

| Product No | Description | Case Qty/MOQ |
|------------|--|--------------|
| 40341 | FR Hose with cover, 105 cm | 1 |
| J5241 | FR Hose cover, 105 cm | 1 |
| 40381 | AIRMAX+ Blower unit - 8 Speed | 1 |
| 40332 | HEPA PAPR filter | 6 |
| 40363 | PAPR charger | 1 |
| 40353 | Replacement 4-Cell 7.4V Battery | 1 |
| 40371 | Replacement Waist belt | 1 |
| 40311 | Replacement Pre-filters | 10 |
| 40312 | Odour removing filter | 10 |
| 40313 | Spark arrestor | 5 |
| 40103 | Translight+ shell with Face Seal and Airduct | 1 |
| 40203 | Translight+ PAPR Face Seal | 1 |
| 40391 | PAPR Carrying Bag | 1 |
| J5237 | 370 sweat band | 2 |



AIRMAX® Elite with WH70

PAPR System with Welding Helmet

Unit contains battery charger, battery, waist belt, hose, HEPA Filter, Pre-Filter and PAPR welding helmet with ADF (odour removing filter sold separately)



POSSIBLE UPGRADES:

- HARD HAT
- FLIP FRONT
- MAGNIFYING LENSES





3 DIFFERENT

ADF CHOICE

Internal or external controls, grinding mode



LARGE

VIEWING AREA

96 x 68,5 mm



FRONT LOADED

QUICK & EASY

Protective lenses and ADFs are easily removed to be replaced or cleaned





INTEGRATED AIR SYSTEM



Adjustable direction of air flow



Particle Protection
TH3

Adjustable airflow

SPEED DIAL

160 - 210 lpm

Charging time

3-4 hrs

Operation time

10 hrs

A / Eine / Une Marque / Una Marca / Un Marchio



The welding community is fully aware that welding fumes are carcinogenic. Our PAPR system achieves the best in class respiratory protection with TH3 rating. Our welding helmet offers best possible optical ratings of 1/1/1/1 and comfort. An almost unbeatable system. When welders are confident that their PPE is designed with their health and safety in mind they can concentrate on the job at hand, achieving maximum productivity.

- Simple control with only one button
- Operation time up to 10 hours with a new filter P R SL and airflow 160 l/min
- Adjustable airflow 160 lpm and 210 lpm
- Rechargeable Li-ion battery
- "Smart" battery charger indicates when charging is complete and will not overcharge
- Quick charge 3-4 hours
- Constant flow regardless of battery level
- Audiovisual and vibrating alarm indicating low airflow and low battery charge
- Breathing hose with flame retardant cover protection from sparks and spatter
- Ergonomic shape and low weight only 980 g
- Slim profile of the unit only 65 mm
- Unit is CE Certified



More details about the WH70 welding helmet on page 60.



EN 12941 TH3 P R SL

R60 AIRMAX Elite PAPR System

| Product No | Description | Case Qty/MOQ |
|------------|------------------------------|--------------|
| J5205 | R60 Airmax Elite PAPR system | 1 |

SPARE PARTS & ACCESSORIES

| Product No | Description | Case Qty/MOQ |
|------------|---------------------------------------|--------------|
| J5223 | Exchangeable battery | 1 |
| J5254 | Comfort padded belt | 1 |
| J5255 | Light flexi hose | 1 |
| J5256 | Battery charger | 1 |
| J5258 | Chemical filter A1 P R SL | 2 |
| J5264 | Chemical filter A1B1E1 P R SL + ozone | 2 |
| J5257 | Particle filters P R SL | 6 |
| J5259 | Pre-filter | 10 |
| J5262 | Spark arrestor | 2 |

- Aerodynamic design for better fume deflection and a smooth rounded perimeter for increased comfort
- Protective lenses and ADFs are easily removed to be replaced or cleaned
- Large viewing area 96 x 68.5 mm
- Lightweight, 399 g w/o ADF
- European designed
- All components made in EU
- Available with 3 different ADFs your choice!
- A European legend!

POSSIBLE UPGRADES

- Hard hat combination
- Flip front option for grinding (110 x 90 mm clear grinding glass with shade 10 mineral glass optional)
- Magnifying lenses 107 x 51 mm (1.0, 1.25, 1.5, 1.75, 2.0, 2.5)















- GMAW

WH70 PAPR Welding Helmet

| Product No | Description | Case Qty/MOQ |
|------------|-------------------------------|--------------|
| J5225 | WH70 BH3 AIR PAPR Grand GDS | 1 |
| J5227 | WH70 BH3 AIR PAPR Grand ES | 1 |
| J5226 | WH70 BH3 AIR PAPR Grand DS | 1 |
| J5224 | WH70 BH3 AIR PAPR for INT ADF | 1 |
| J5229 | WH70 BH3 AIR PAPR for EXT ADF | 1 |

SPARE PARTS & ACCESSORIES


| Product No | Description | Case Qty/MOQ |
|------------|----------------------------|--------------|
| J5233 | Concept hard hat | 4 |
| J5234 | Hard hat adaptor set | 1 |
| J5243 | Hard hat sweat band | 2 |
| J9940 | Flip front kit 110 x 90 mm | 1 |
| J9941 | Flip front kit 108 x 51 mm | 1 |
| J8570 | 375 head gear | 1 |
| J5237 | 375 sweat band | 2 |
| J9931 | Outer lens 147 x 125mm | 10 |
| J9932 | Inner lens 107.5 x 71.5mm | 10 |
| J9934 | Washer set | 1 |
| J9936 | Mag lens holder | 1 |
| J9942 | Leather neck protection | 1 |
| J9933 | Flexi face seal | 1 |
| J5238 | Standard face seal | 1 |
| J9935 | Hose holder | 1 |
| 40391 | PAPR Carrying Bag | 1 |

HEALTH SAFETY PRODUCTIVITY




Jackson Safety® PAPR Face Shield


AIRMAX®+ with F50



Unit contains battery charger, battery, waist belt, hose, HEPA Filter, Pre-Filter and PAPR face shield (odour removing filter sold separately)









Particle Protection

Adjustable airflow

Charging time

Operation time

Ingress Protection

TH3

170 - 240 lpm

5 hrs

10 hrs

ID





A / Eine / Une Marque / Una Marca / Un Marchio



- **TH3** Particle Protection (Highest Possible Rating)
- **8 different** blower speed settings, adjustable airflow from 170 to 240 lpm **(10 lpm Increment)**
- IP 54 Certified
- **Vibration** and **Filter Alarms** to inform when filters need changing or low battery
- Comes with **HD 4 Cell Li-ion Battery 7.4V/5200mAh**. Charging time: 5 hours
- Operation time up to 10 hours with a new filter P R SL and airflow 170 l/min
- Large controls
- Easy to use with oversized gloves
- In combination with F50 face shield
- Breathing hose with flame retardant cover protection from sparks and spatter
- Unit is CE Certified

- Respiratory protection during grinding and other industrial tasks where the wearer is exposed to contamination from solid and liquid particles
- Fitted with an *impact rated* grinding visor
- Large viewing area 225 x 144 mm
- Adjustable ergonomic headgear with airduct







EN 12941 TH3 P R SL

J7265

AIRMAX+ with F50 FACE SHIELD PAPR SYSTEM

| Product No | Description | Case Qty/MOQ |
|------------|------------------------------|--------------|
| J7265 | AIRMAX+ with F50 Face Shield | 4 |

SPARE PARTS & ACCESSORIES

| Product No | Description | Case Qty/MOQ |
|------------|---------------------------------|--------------|
| 40340 | FR Hose with cover, 85 cm | 1 |
| J5241 | FR Hose cover, 105 cm | 1 |
| 40381 | AIRMAX+ Blower unit - 8 Speed | 1 |
| 40332 | HEPA PAPR filter | 6 |
| 40363 | PAPR charger | 1 |
| 40353 | Replacement 4-Cell 7.4V Battery | 1 |
| 40371 | Replacement FR Waist belt | 1 |
| 40311 | Replacement Pre-filters | 10 |
| 40312 | Odor removing filter | 10 |
| 40313 | Spark arrestor | 5 |
| J7261 | F50 PAPR Face Shield | 1 |
| J5252 | F50 Visor Lens | 20 |
| J7260 | F50 PAPR Head Gear | 5 |
| J5462 | PAPR Sweat Band | 50 |
| J5251 | F50 PAPR Face Seal | 5 |

HEALTH SAFETY PRODUCTIVITY



Jackson Safety® PAPR Face Shield

AIRMAX*+ with **MAXVIEW**



PAPR System with Face Shield

Unit contains battery charger, battery, waist belt, hose, HEPA Filter, Pre-Filter and PAPR face shield (odour removing

filter sold separately)







CLEAR VISION

Premium Anti-Fog Coating

SPEED DIAL

MAXIMUM COMFORT

Fast & Easy Headgear **Adjustments**



OPTIMUM SAFETY

High Impact Polycarbonate Window



INDUSTRY-LEADING **PANORAMIC VIEW**



Particle Protection

Adjustable airflow

Charging time

Operation time

Ingress Protection

TH3

170 - 240 lpm

5 hrs

10 hrs





A / Eine / Une Marque / Una Marca / Un Marchio



- **TH3** Particle Protection (Highest Possible Rating)
- **8 different** blower speed settings, adjustable airflow from 170 to 240 lpm **(10 lpm Increment)**
- IP 54 Certified
- **Vibration** and **Filter Alarms** to inform when filters need changing or low battery
- Comes with **HD 4 Cell Li-ion Battery 7.4V/5200mAh**. Charging time: 5 hours
- Operation time up to 10 hours with a new filter P R SL and airflow 170 l/min
- Large controls
- Easy to use with oversized gloves
- Breathing hose with flame retardant cover protection from sparks and spatter
- In combination with Maxview face shield
- Unit is CE Certified

- Oversized **370 Speed Dial**™ ratcheting headgear guarantees a precise fit every time
- Patented "Qwik-Fit" swivel headband adjusts the suspension gear to the user's head for superior comfort
- Comes standard with a soft fabric sweathand for increased comfort and convenience
- Extended top-of-head coverage protects against hazards from above
- Built-in side and chin guard protects against splash and flying debris
- Lightweight and balanced construction for all-day comfort
- Extra-large polycarbonate window for superior optics and industry-leading panoramic views
- Up and down detents lock securely in place until manually adjusted





GRINDING

More details about the Maxview face shield on page 96.



EN 12941 TH3 P R SL

AIRMAX+ with MAXVIEW FACE SHIELD PAPR SYSTEM

| Product No | Description | Case Qty/MOQ |
|------------|---|--------------|
| 40601 | AIRMAX+ with Maxview Face Shield anti-fog coating | 4 |

SPARE PARTS & ACCESSORIES

| Product No | Description | Case Qty/MOQ |
|------------|--|--------------|
| 40340 | FR Hose with cover, 85 cm | 1 |
| J5241 | FR Hose cover, 105 cm | 1 |
| 40381 | AIRMAX+ Blower unit - 8 Speed | 1 |
| 40332 | HEPA PAPR filter | 6 |
| 40363 | PAPR charger | 1 |
| 40353 | Replacement 4-Cell 7.4V Battery | 1 |
| 40371 | Replacement FR Waist belt | 1 |
| 40311 | Replacement Pre-filters | 10 |
| 40312 | Odor removing filter | 10 |
| 40313 | Spark arrestor | 5 |
| 47001 | Maxview (A/F) PAPR Complete Head Top (No hose) | 1 |
| J8571 | PAPR 370 Headgear | 1 |
| J5244 | Standard face seal | 1 |
| 14214 | Clear replacement window | 36 |
| 14215 | Clear replacement window anti-fog | 36 |
| J5237 | 370 sweat band | 2 |

HEALTH SAFETY PRODUCTIVITY



Jackson Safety® PAPR Face Shield

AIRMAX*+ with **QUAD 500**

PAPR System with Face Shield

Unit contains battery charger, battery, waist belt, hose, HEPA Filter, Pre-Filter and PAPR face shield (odour removing

filter sold separately)









PREMIUM MULTI-PURPOSE FACE SHIELD



Particle Protection

Adjustable airflow

Charging time

Operation time

Ingress Protection

TH3

170 - 240 lpm

5 hrs

10 hrs





- **TH3** Particle Protection (Highest Possible Rating)
- **8 different** blower speed settings, adjustable airflow from 170 to 240 lpm **(10 lpm Increment)**
- IP 54 Certified
- Vibration and Filter Alarms to inform when filters need changing or low battery
- Comes with **HD 4 Cell Li-ion Battery 7.4V/5200mAh**. Charging time: 5 hours
- Operation time up to 10 hours with a new filter P R SL and airflow 170 l/min
- Large controls
- Easy to use with oversized gloves
- Breathing hose with flame retardant cover protection from sparks and spatter
- In combination with Quad 500 face shield
- Unit is CE Certified

More details about the Quad 500 face shield on page 98.





EN 12941 TH3 P R SL

- All Quad 500 products have been designed to offer maximum above-the-neck face protection, including an extra-large molded polycarbonate window featuring our premium anti-fog coating
- For added protection, the molded window is completely framed on the sides and chin and features an extralarge crown
- The Quad 500 offers exceptional panoramic views with virtually no distortion
- Ideal for grinding, cutting, oxy/acetylene cutting, plasma cutting, brazing and more
- The Quad 500 face shield is also available with an exclusive, extra-large flip-up/flip-down IR window for added eye protection when used in applications producing infrared hazards
- It's easy and safe—by keeping the Quad 500 clear window in the down position at all times, the operator can flip the IR shaded window up or down, providing uninterrupted face protection during cutting and grinding operations
- Flip windows available in:
 - **Shade 5 IR** for oxy/acetylene cutting, brazing, and plasma cutting
 - Shade 8 IR for oxy/acetylene welding and plasma cutting
- Both the clear and flip windows feature detents that lock in both the up and down positions
- Designed to be used with most goggles, respirators, and all safety glasses

AIRMAX+ with QUAD 500 FACE SHIELD PAPR SYSTEM

| Product No | Description | Case Qty/MOQ |
|------------|---|--------------|
| 40620 | AIRMAX+ with Quad 500 Premium Multi-Purpose Face Shield | 4 |
| 40630 | AIRMAX+ with Quad 500 Premium Multi-Purpose Face Shield Flip Visor Shade 5 IR | 4 |
| 40633 | AIRMAX+ with Quad 500 Premium Multi-Purpose Face Shield Flip Visor Shade 8 IR | 4 |

SPARE PARTS & ACCESSORIES

| Product No | Description | Case Qty/MOQ |
|------------|---|--------------|
| 40340 | FR Hose with cover, 85 cm | 1 |
| J5241 | FR Hose cover, 105 cm | 1 |
| 40381 | AIRMAX+ Blower unit - 8 Speed | 1 |
| 40332 | HEPA PAPR filter | 6 |
| 40363 | PAPR charger | 1 |
| 40353 | Replacement 4-Cell 7.4V Battery | 1 |
| 40371 | Replacement FR Waist belt | 1 |
| 40311 | Replacement Pre-filters | 10 |
| 40312 | Odor removing filter | 10 |
| 40313 | Spark arrestor | 5 |
| 47020 | Quad 500/Clear PAPR Complete Head Top (No hose) | 1 |
| 47030 | Quad 500/Shade 5 PAPR Complete Head Top (No hose) | 1 |
| 47033 | Quad 500/Shade 8 PAPR Complete Head Top (No hose) | 1 |
| J8572 | PAPR 370 Headgear | 1 |
| J5244 | Standard face seal | 1 |
| 14250 | 21.8 x 20.9 x 0.15 cm clear anti-fog window | 12 |
| 14255 | 10.94 x 23.12 x 0.017 cm Shade 5 IR visor | 12 |
| 14258 | 10.94 x 23.12 x 0.017 cm Shade 8 IR visor | 12 |
| J5237 | 370 sweat band | 2 |

HEALTH SAFETY PRODUCTIVITY



Jackson Safety® PAPR Soft Hood

AIRMAX*+ with **SOFT HOOD**

PAPR System with Soft Hood

Unit contains battery charger, battery, waist belt, hose, HEPA Filter, Pre-Filter and soft hood (odour removing filter sold separately)









Impact rated polycarbonate visor



LIGHTWEIGHT

Maximum comfort & fit



VERSATILITY

Suitable for all face shapes



Industrial tasks

Spraying and painting

Medical use

Available in black color

Disposable soft hood Also available



Particle Protection

Adjustable airflow

Charging time

Operation time

Ingress Protection

TH3

170 - 240 lpm

5 hrs

10 hrs





A / Eine / Une Marque / Una Marca / Un Marchio



- **TH3** Particle Protection (Highest Possible Rating)
- 8 different blower speed settings, adjustable airflow from 170 to 240 lpm (10 lpm Increment)
- IP 54 Certified
- Vibration and Filter Alarms to inform when filters need changing or low battery
- Comes with HD 4 Cell Li-ion Battery 7.4V/5200mAh. Charging time: 5 hours
- Operation time up to 10 hours with a new filter P R SL and airflow 170 I/min
- Large controls Easy to use with oversized gloves
- In combination with soft hood medical use, painting and spraying
- Unit is CE Certified

- Extremely light weight
- Maximum comfort
- Positive pressure system reduces user fatigue
- Superior protection
- Fitted with an impact rated polycarbonate visor
- Clear vision
- Protection from Aerosol Generated Particulate and splash protection
- The hood does not require a face fit; therefore, complexity of fitting is reduced, which is highly desirable in Pandemic situations
- It is suitable for all face shapes including people with facial hair, making the system extremely versatile
- The hood is manufactured from tough washable materials which:
 - allows a full clean down after use
 - or it may be disposed of in clinical waste







AIRMAX+ with SOFT HOOD PAPR SYSTEM

| Product No | Description | Case Qty/MOQ |
|------------|-------------------------------|--------------|
| 40070 | AIRMAX+ with Soft Hood, white | 4 |
| 40071 | AIRMAX+ with Soft Hood, black | 4 |

SPARE PARTS & ACCESSORIES


| Product No | Description | Case Qty/MOQ |
|------------|--|--------------|
| 40340 | FR Hose with cover, 85 cm | 1 |
| J7064 | Hose without cover, 85 cm | 1 |
| J5241 | FR Hose cover, 105 cm | 1 |
| 40381 | AIRMAX+ Blower unit - 8 Speed | 1 |
| 40332 | HEPA PAPR filter | 6 |
| 40363 | PAPR charger | 1 |
| 40353 | Replacement 4-Cell 7.4V Battery | 1 |
| 40371 | Replacement FR Waist belt | 1 |
| 40372 | Washable belt | 1 |
| 40311 | Replacement Pre-filters | 10 |
| 40312 | Odor removing filter | 10 |
| 40313 | Spark arrestor | 5 |
| 40170 | Replacement soft hood, reusable, white | 1 |
| 40171 | Replacement soft hood, reusable, black | 1 |
| 40175 | Disposable soft hood, white | 5 |
| J7060 | Sweat band | 2 |
| 20690 | Soft Hood Headgear | 1 |



AIRMAX*+

PAPR System - Blower



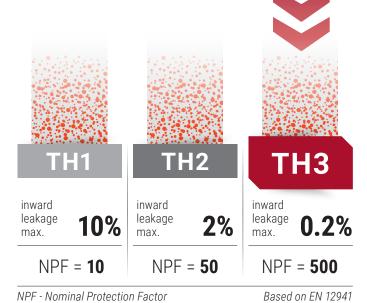



Particle Protection TH3

Adjustable airflow

170 - 240 lpm

Charging time

Ingress Protection

5 hrs

10 hrs

Operation time

IP







- TH3 Particle Protection Highest Possible Rating
- Air flow: 170 to 240 lpm (10 lpm Increment)
- Blower System comes with **8 different blower speed settings**
- *IP 54 Certified* Protects against dust (limited ingress, no harmful deposits) and water splash from all directions (limited ingress permitted)
- **Vibration** and **Audible Filter Alarms** to inform when filters need changing or low battery
- Comes with replaceable and rechargeable **HD 4 Cell Li-ion Battery 7.4V/5200mAh**. Charging time: 5 hours
- Operation time up to 10 hours with a new filter P R SL and airflow 170 l/min
- Unit contains battery charger, battery, waist belt, hose, HEPA Filter, Pre-Filter, (odour removing filter sold separately)
- Sleek controls, large enough to use with oversized gloves
- Unit is CE Certified



| Product No | Description | Case Qty/MOQ |
|------------|-------------------------------|--------------|
| 40381 | AIRMAX+ Blower unit - 8 Speed | 1 |

SPARE PARTS & ACCESSORIES

| Product No | Description | Case Qty/MOQ |
|------------|--|--------------|
| 40332 | HEPA PAPR filter | 6 |
| 40363 | PAPR charger | 1 |
| 40353 | Replacement 4-Cell 7.4V Battery | 1 |
| 40371 | Replacement Waist belt | 1 |
| 40311 | Replacement Pre-filters | 10 |
| 40312 | Odour removing filter | 10 |
| 40341 | FR Hose with cover, 105 cm | 1 |
| 40340 | FR Hose with cover, 85 cm | 1 |
| J5241 | FR Hose cover, 105 cm | 1 |
| J7064 | Hose without cover, 85 cm | 1 |
| 40313 | Spark arrestor | 5 |
| 40368 | FR Comfort Backpack for PAPR blower | 1 |
| 40369 | Comfort belt with leather straps and harness | 1 |

INGRESS PROTECTION RATING







Protected against solid objects greater than 50 mm such as a hand.

Protected against solid objects greater than 12.5 mm such as a finger.

Protected against solid objects greater than 2.5 mm such as screwdriver.

Protected against solid objects greater than 1 mm such as a wire.

Dust protected. Prevents ingress of dust sufficient to cause harm.

Dust tight. No ingress of dust.

Protected against vertically falling drops of water.

Protected against direct sprays of water up to 15° from the vertical.

Protected against direct sprays of water up to 60° from the vertical

Protected against water splashed from all directions.

Protected against low pressure jets of water from all directions.

6 Protected against strong jets of water.

Protected against the effects of temporary immersion between 15 cm and 1 m for 30 minutes.

Protected against long periods of immersion under pressure.





Jackson Safety® PAPR Systems

PAPR CHARGING STATION

5-Station battery charger for Airmax PAPR System









ALLOWS FOR VARIOUS CHARGING POSITIONS: TABLE-TOP, WALL MOUNTED VERTICALLY **OR HORIZONTALLY**



COMPATIBILITY

Charges Airmax batteries (J7068)



MULTI CHARGING UNIT

Accommodates up to 5 batteries

- LED charge indicator for each charged battery:
- Red battery empty and charging,
- Green battery full or not connected
- Easy snap in / snap out battery placement into charging station
- No clutter with chargers' cables
- Easy single charger replacement in case of failure
- Main cable length: 2m
- Main power switch
- Frame material: plexi-glass, color: black
- Dimensions WxDxH: 370mm x 175mm x 173mm, Weight: 2400 g
- Operating temperature: 0 to 45°C
- Storage temperature: -20 to + 60°C
- Humidity: 10% to 90% relative
- Warranty: 2 years
- EU and UK version available
- Batteries not included

| Product No | Description | Case Qty/MOQ |
|------------|----------------------------------|--------------|
| 40364 | AIRMAX 5-Station Battery Charger | 1 |

Input Voltage

Output Voltage

Charging time

100-240 V

50-60 Hz

8.4 V

5 x 1.5 A

5 x 12.5 W

5 hrs

A / Eine / Une Marque / Una Marca / Un Marchio





Jackson Safety® PAPR Systems

PAPR CHARGING STATION

5-Station battery charger for Airmax+ PAPR System





ALLOWS FOR VARIOUS CHARGING POSITIONS: TABLE-TOP, WALL MOUNTED VERTICALLY OR HORIZONTALLY





COMPATIBILITY

Charges Airmax+ batteries (40353)



MULTI CHARGING UNIT

Accommodates up to 5 batteries

- LED charge indicator for each charged battery:
 - Red battery empty and charging,
 - Green battery full or not connected
- Easy snap in / snap out battery placement into charging station
- No clutter with chargers' cables
- Easy single charger replacement in case of failure
- Main cable length: 2m
- Main power switch
- Frame material: plexi-glass, color: black
- Dimensions WxDxH: 370mm x 175mm x 173mm, Weight: 2400 g
- Operating temperature: 0 to 45°C
- Storage temperature: -20 to + 60°C
- Humidity: 10% to 90% relative
- Warranty: 2 years
- EU and UK version available
- Batteries not included

| Product No | Description | Case Qty/MOQ |
|------------|-----------------------------------|--------------|
| 40365 | AIRMAX+ 5-Station Battery Charger | 1 |

Input Voltage

Output Voltage

Charging time

100-240 V


50-60 Hz

8.4 V

5 x 1.5 A

5 x 12.5 W

5 hrs

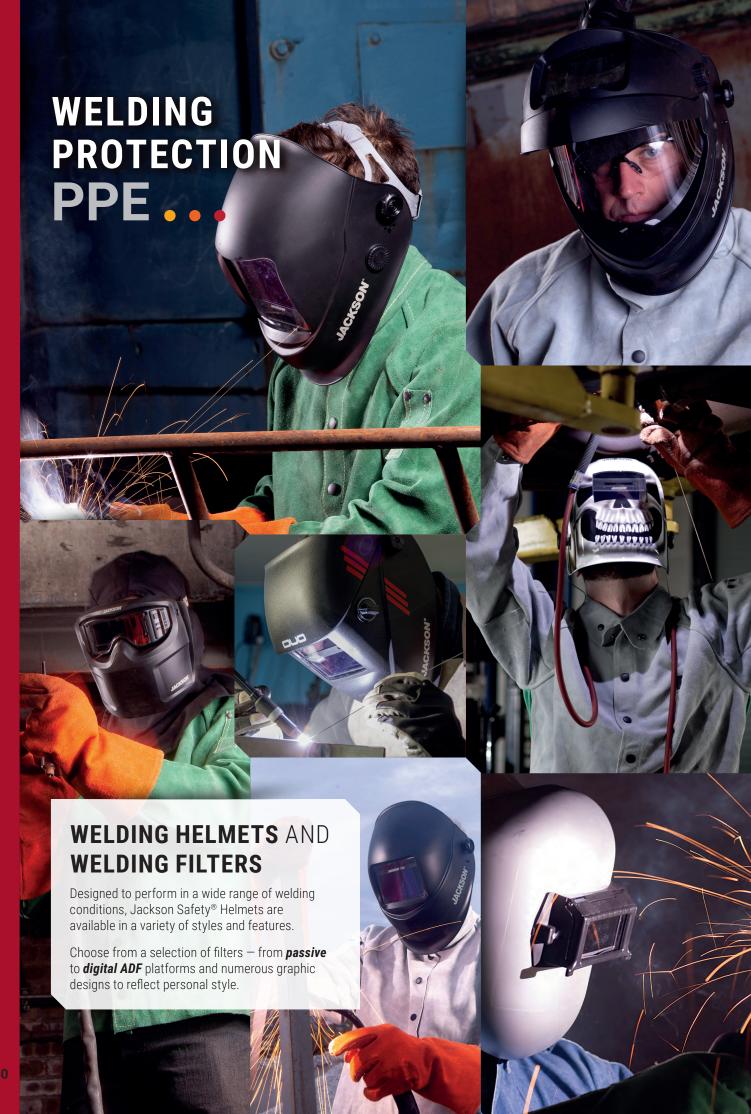



PASSIVE VS. AUTO-DARKENING FILTER HELMETS

Passive helmets offer great protection.

Auto-Darkening Filters offer protection and productivity.

Both passive and Auto-Darkening Filter (ADF) welding helmets provide excellent eye protection. Research shows that ADF helmets also offer impressive productivity gains, as well as greater user comfort.

ADDED BENEFITS OF AN ADF

Increased accuracy

Because the welder can always see what he's doing, and start in exactly the right spot.

Increased comfort

By eliminating the repetitive "lifting and nodding" that can cause neck strain.

Increased protection

From injuries caused by welding, chipping or grinding in the proximate area.

Increased peace of mind

Because even if the ADF should not become active during an arc, it still protects eyes from serious damage.

Increased productivity

By eliminating the time it takes to lift and nod the helmet before and after each weld.

True Color ADF

JACKSON SAFETY® auto-darkening filters with 1/1/1/1 optical classification provide:

A clear view from various angles

Which can reduce eye fatigue (the need to move, adjust and refocus).

Superior optical quality

Allows you to do your most creative and productive work.



Welders at all experience levels know the value and essential protection requirements of the right helmet and filter for the right job. That's why we provide a range of welding helmets and filters with features that are just right for you.



Finding a better way



WELDING **HEADTOPS**



280 **SERIES**



WH25 DUO



REBEL



NEW

LEATHER WELDING HOOD



TRANSLIGHT 355

GOOD

BETTER





| CHOOSE YOUR HEADTOP | 280 SERIES | WH20 ASPIRE | WH25 DUO | REBEL | LEATHER WELDING HOOD | TRANSLIGHT 355 | |
|----------------------|---------------|----------------|-------------|-------|----------------------------|-------------------|--|
| Moderate Welding | • | • | • | • | • | • | |
| Professional Welding | | | | | | | |
| Light Grinding | | | • | | | • | |
| Heavy Grinding | | | | | | | |





6 FEET UNDER

HELLFIRE

GRAY MATTER







FREEDOM

DOM REAPERS N' ROSES

BEAD DEMON











GRAPHIC WELDING HELMETS

TRANSLIGHT FLIP 455

TRANSLIGHT+ 555

BEST





| 6 FEET UNDER GRAY MATTER REAPERS N' ROSES | HELLFIRE FREEDOM BEAD DEMON | TRANSLIGHT FLIP 455 | TRANSLIGHT+ 555 | WH70 |
|---|-----------------------------------|------------------------|--------------------|------|
| • | • | • | • | • |
| | • | • | • | |
| | • | • | • | • |
| | | • | | • |



280 SERIES

Traditional 'Bucket style' welding helmet





Jackson Safety 280 Series Welding Helmet has the traditional "Bucket Style" design that is lightweight and extremely durable. The 280 Series contains a rigid bib that deflects welding spatter making it ideal for various welding applications.

- Jackson Safety 280 Series welding helmet has been an industry leader for decades
- Made in the USA, the 280 Series is a traditional bucket style welding helmet
- Molded from **Super Tuff nylon** lighter than fiberglass and extremely durable
- Patented **Sel-Snap lens retention system** provides easy loading of filter, cover and protective plates
- Lift front comes standard with spring loaded positive lock feature
- Our proprietary SUPER KOOL SILVER COATING keeps the helmet 30% cooler than standard helmets and sheds spatter without burning
- Provides maximum operator comfort and safety
- "Quick-release" ratchet headgear suspension with sweatband included
- Specially designed shape for use with cartridge respirators

TECHNICAL DATA

| Viewing Area | 108 x 50,8 mm |
|--------------------|---------------|
| Weight | 592 g |
| Passive Lens Shade | 10 |





SMAW











280 SERIES

| Product No | Description | Case Qty/MOQ |
|------------|--|--------------|
| S28311 | 280 Series Welding Helmet with Mineral Glass Shade 10, silver - lift front | 4 |

| Product No | Description | Case Qty/MOQ |
|------------|-----------------------------|--------------|
| J8302 | Protective lens 107 x 51 mm | 100 |



WH20 ASPIRE

Welding helmet



- 110 x 90 mm cartridge size, 97 x 42 mm viewing area
- Shade range 9-13
- Shade selection, sensitivity and delay adjustment
- External shade adjustment
- Adjustable ergonomic headgear
- Total weight 510 g (ADF included)



TECHNICAL DATA

| Viewing Area | 97 x 42 mm | |
|------------------------|------------------------------------|--|
| Optical Clarity | 1/1/1/2 | |
| Weight | 495 g | |
| Open State Shade | 4 | |
| Closed State Shade | 9-13 | |
| Shade Adjustment | yes / external | |
| Sensitivity Adjustment | yes / internal | |
| Delay Adjustment | yes / internal | |
| Grinding Mode | no | |
| Switching Time | 0.3 ms | |
| Energy Supply | solar cells / no battery change | |













WH20 ASPIRE

| Product No | Description | Case Qty/MOQ |
|------------|---|--------------|
| J8049 | WH20 ASPIRE Welding Helmet with WF20 4/9-13 EXT ADF | 6 |

SPARE PARTS & ACCESSORIES


| Product No | Description | Case Qty/MOQ |
|------------|--------------------------|--------------|
| J8370 | Head gear with sweatband | 1 |
| J8319 | Outer lens 115 x 104 mm | 100 |
| J8302 | Inner lens 107 x 51 mm | 100 |

47



WH25 DU0

Welding helmet

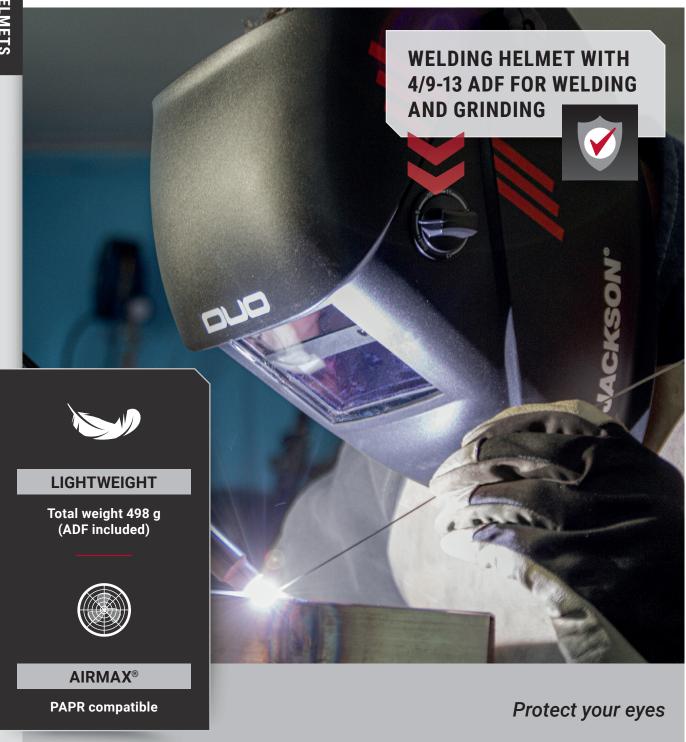

- Optical classes 1/1/1/2
- AIRMAX PAPR compatible
- 110 x 90 mm cartridge size, 92 x 41 mm viewing area
- Shade range 9-13, sensitivity and delay adjustment, grinding mode
- Total weight 498 g (ADF included)



TECHNICAL DATA

| Viewing Area | 92 x 41 mm |
|------------------------|--|
| Optical Clarity | 1/1/1/2 |
| Hard Hat Option | no |
| Weight | 498 g |
| Open State Shade | 4 |
| Closed State Shade | 9-13 |
| Shade Adjustment | yes / external |
| Sensitivity Adjustment | yes / internal |
| Delay Adjustment | yes / internal |
| Grinding Mode | yes |
| Switching Time | 0.3 ms |
| Energy Supply | solar cells / non replaceable 3V Li-ion batteries |











MIG/MAG - GMAW -



WH25 DUO / WH25 DUO PAPR

| Product No | Description | Case Qty/MOQ |
|------------|---|--------------|
| J7101 | WH25 DUO Welding Helmet with 4/9-13 ADF | 6 |

| Product No | Description | Case Qty/MOQ |
|------------|--|--------------|
| J7176 | WH25 DUO Front Cover Lens | 10 |
| J7177 | WH25 DUO Inner Cover Lens - 94,5 x 45 mm | 10 |
| J7172 | WH25 DUO ADF Cradle | 1 |
| J7173 | WH25 DUO Welding - Lens Retainer | 1 |
| J7910 | WH25 DUO Weld Helm Spacer Kit | 1 |
| J7174 | WH25 DUO Welding Head Gear Pro | 1 |
| J7175 | WH25 DUO Sweat Band Pro | 2 |
| J7180 | DUO ADF 4/9-13 | 1 |
| J7061 | WH25 DUO PAPR Faceseal | 1 |
| J7060 | WH25 DUO PAPR Sweatband | 2 |
| J7062 | WH25 DUO PAPR Head Gear | 1 |



Jackson Safety® ADF Welding Mask

REBEL™

ADF Welding/Goggle Mask - Digital





- New Rebel ADF masks are an ideal product for intermittent welding applications such as: automotive, fleet and agricultural equipment repairs; DIY projects; general shop applications
- Constructed with the goggle / face shield as a one piece integrated unit; eliminating spark & spatter risks to front of face
- The Rebel's soft, comfortable goggle body conforms very well to face contours, reducing UV/IR ray leakage concerns
- Specially designed to fit over most prescription eyewear no cheater magnifying lens needed!
- Features a replaceable clear outer lens for added ADF protection (46930-5 pack)
- No adapters needed to use with hard hats
- Low TIG amp rated >10 amps
- Solar panel recharges CR 2450 replaceable battery

 each battery lasts up to 1,300 hours before
 replacement is necessary

| TECHNICAL DATA | REBEL | |
|------------------------|--|--|
| Viewing Area | 90 x 35 mm | |
| Optical Clarity | 1/1/1/2 | |
| True Color | Yes | |
| Weight | 250 g | |
| Open State Shade | 3 | |
| Closed State Shade | 5-12 | |
| Button Controls | digital | |
| Shade Adjustment | yes / external | |
| Sensitivity Adjustment | yes / external | |
| Delay Adjustment | yes / external | |
| Grinding Mode | yes / external | |
| Switching Time | 0.1 ms | |
| Energy Supply | Solar cells & Lithium (CR2450) Batteries | |





SMAW -











REBEL

| Product No | Description | Case Qty/MOQ |
|------------|--|--------------|
| 46200 | Rebel ADF Welding Mask & FR Hood (kit) | 6 |

| Product No | Description | Case Qty/MOQ |
|------------|--|--------------|
| 46600 | Rebel Replacement FR Hood | 1 |
| 46930 | Rebel Replacement Lens Kit, 5 External, 3 Internal | 8 |




LEATHER WELDING HOOD

Leather Welding Hood



- Heat resistant and flexible leather design
- Tough, pliable, and breathable leather covering
- Lift front style for added convenience
- Headgear teeth automatically disengage during adjustment for speed and ease
- All around protection ideal for working in close proximity with other welders
- Ideal for use in overhead welding applications or when working in tight spaces
- CE and UKCA certified, meets or exceeds ANSI Z87.1 and CAN/CSA Z94.3 standards

















LEATHER WELDING HOOD

| Product No | Description | Case Qty/MOQ |
|------------|--|--------------|
| 14531 | Leather Welding Hood — 2" x 4.25" (108 x 51 mm) Lift Front (headgear included) | 4 |

SPARE PARTS & ACCESSORIES


| Product No | Description | Case Qty/MOQ |
|------------|-----------------------------|--------------|
| J8302 | Protective lens 107 x 51 mm | 100 |

HEALTH SAFETY PRODUCTIVITY



TRANSLIGHT™ 355

Premium Auto Darkening Welding Helmet

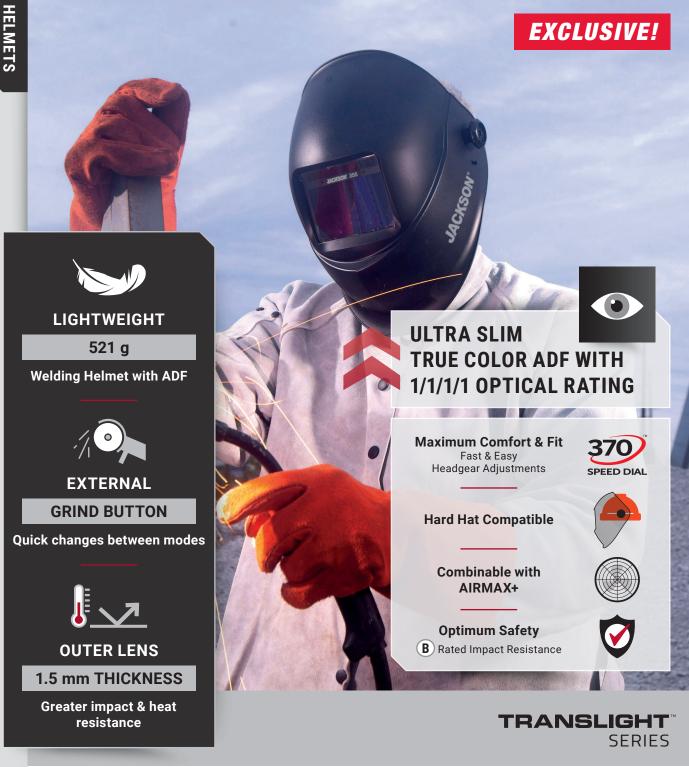



- Translight 355 Series is super-lightweight with a sleek, modern design and look
- Auto Darkening Filter meets 1/1/1/1 Optical Clarity Standard, the highest in the industry
- ADF contains external grind button for quick changes between modes
- Welding, Grinding, Cutting modes included
- Includes patented 370 Speed Dial ratcheting headgear system
- Switching speeds of 0.25 ms
- Solar & Lithium Batteries (CR2032)
- 4 sensor technology for optimal performance
- Outer lens at 1.5 mm thickness

| TECHNICAL DATA | TRANSLIGHT 355 |
|------------------------|-----------------------------------|
| Viewing Area | 98 x 62 mm |
| Optical Clarity | 1/1/1/1 |
| True Color | Yes |
| Weight | 521 g |
| Open State Shade | 3 |
| Closed State Shade | 5-14 |
| Button Controls | digital/analogue |
| Shade Adjustment | yes / internal |
| Sensitivity Adjustment | yes / internal |
| Delay Adjustment | yes / internal |
| Grinding Mode | yes / external |
| Switching Time | 0.25 ms |
| Energy Supply | Solar & Lithium (CR2032) Batterio |











- GTAW -> 5 Amp

MMA - SMAW -

PWA

MIG/MAG - GMAW -

GRINDING





TRANSLIGHT 355

| Product No | Description | Case Qty/MOQ |
|------------|---|--------------|
| 46230 | TRANSLIGHT 355 Welding Helmet with ADF, black | 4 |

| Product No | Description | Case Qty/MOQ |
|------------|---|--------------|
| 46432 | Translight 355 Replacement ADF | 1 |
| 46914 | Translight 355 Internal Safety Plates | 10 |
| 46923 | Translight 355/455 External Safety Plates | 10 |
| 20693 | Translight Replacement 370 Headgear | 1 |
| 46993 | Translight 355 Lens retainer | 1 |
| J5234 | Hard hat adaptor set | 1 |
| J5237 | 370 sweat band | 2 |



TRANSLIGHT™ FLIP 455

Premium Auto Darkening Welding Helmet





- Easy-to-use lift mechanism reveals a 297 sq. cm clear extra-large polycarbonate face shield for grinding operations
- Flip system ensures maximum safety provides uninterrupted face protection when switching from welding to grinding operations
- High quality True Color ADF provides a full 60 square cm viewing area
- Features an extra-large face shield which provides superior peripheral vision
- Welding, grinding, cutting modes functions are standard features
- 4 sensor technology for optimal performance
- Auto-darkening filter meets 1/1/1/1 optical clarity standard, the highest in the industry
- Includes patented **370 Speed Dial** ratcheting headgear system
- Switching speeds of 0.1 ms
- Welding helmet with Mineral glass Shade 10 available as custom order

| TECHNICAL DATA | TRANSLIGHT FLIP 455 |
|------------------------|---------------------------------------|
| Viewing Area | 98 x 62 mm |
| Optical Clarity | 1/1/1/1 |
| True Color | Yes |
| Weight | 725 g |
| Open State Shade | 4 |
| Closed State Shade | 5-8/9-13 |
| Button Controls | digital & analog |
| Shade Adjustment | yes / internal |
| Sensitivity Adjustment | yes / internal |
| Delay Adjustment | yes / internal |
| Grinding Mode | yes / internal |
| Switching Time | 0.1 ms |
| Energy Supply | Solar & Lithium (CR2032) Batteries |











- **GTAW** - > 5 Amp

- SMAW -

PWA

- GMAW -

GKINDIN





TRANSLIGHT FLIP 455

| Product No | Description | Case Qty/MOQ |
|------------|--|--------------|
| 46240 | TRANSLIGHT FLIP 455 Welding Helmet with ADF, black | 4 |

| Product No | Description | Case Qty/MOQ |
|------------|--|--------------|
| 46442 | Translight 455 Replacement ADF | 1 |
| 46923 | Translight 355/455 External Safety Plates (Pack of 10) | 10 |
| 46914 | Translight 355/455 Internal Safety Plates (Pack of 10) | 10 |
| 46640 | Translight Flip 455 Face Shield Replacement Window (Pack of 5) | 5 |
| 20693 | Translight Replacement 370 Headgear | 1 |
| 46991 | Translight Flip Spring Replacement Mechanism Kit | 1 |
| J5234 | Hard hat adaptor set | 1 |
| J5237 | 370 sweat band | 2 |



TRANSLIGHT™+555

Premium Auto Darkening Welding Helmet





The Translight™ Series is defined philosophies by our innovative global design. We mix industry leading features with new advancements in technology to transcend the welding industry.

- Translight™ shell has a sleek modern design
- Helmet is lightweight & ergonomically balanced to reduce stress & fatigue
- Auto Darkening Filter meets 1/1/1/1 Optical Clarity standard, the highest in the industry
- Includes an external grind button, so end users can switch modes with ease
- Features the new external shade adjuster to help aid in visual focus
- The new shade adjuster can finely tune shades up to +/- 1 full shade with .2 shade adjusting increments
- Welding, Grinding and Cutting can be done with this versatile ADF
- Includes patented 370 Speed Dial ratcheting headgear system
- Advanced digital controls are a great QOL enhancement for welders
- Switching speeds of 0.2 ms

| TECHNICAL DATA | TRANSLIGHT+ 555 | |
|------------------------|---------------------------------------|--|
| Viewing Area | 98 x 82 mm | |
| Optical Clarity | 1/1/1/1 | |
| True Color | yes | |
| Weight | 612 g | |
| Open State Shade | 3 | |
| Closed State Shade | 5-8/9-14 | |
| Button Controls | Digital | |
| Shade Adjustment | yes / internal | |
| Sensitivity Adjustment | yes / internal | |
| Delay Adjustment | yes / internal | |
| Grinding Mode | yes / external | |
| Switching Time | 0.2 ms | |
| Energy Supply | Solar & Lithium (CR2032) Batteries | |











- GTAW -

MMA SMAW -

MIG/MAG (- GMAW -

GRINDIN





TRANSLIGHT+ 555

| Product No | Description | Case Qty/MOQ |
|------------|--|--------------|
| 46250 | TRANSLIGHT+ 555 Welding Helmet with ADF, black | 4 |

| Product No | Description | Case Qty/MOQ |
|------------|---|--------------|
| 46452 | Translight+ 555 Replacement ADF | 1 |
| 46925 | Translight+ 555 External Safety Plates (Pack of 10) | 10 |
| 46915 | Translight+ 555 Internal Safety Plates (Pack of 10) | 10 |
| 46995 | Translight+ 555 Replacement Lens Retainer | 1 |
| 20693 | Translight Replacement 370 Headgear | 1 |
| J5234 | Hard hat adaptor set | 1 |
| J5237 | 370 sweat band | 2 |
| 46996 | Translight+ 555 Darkening hood | 1 |



WH70

Premium Auto Darkening Welding Helmet





- Aerodynamic design for better fume deflection and a smooth rounded perimeter for increased comfort
- Protective lenses and ADFs are easily removed to be replaced or cleaned
- Large viewing area 96 x 68.5 mm
- Lightweight, 399 g w/o ADF
- European designed
- All components made in EU
- Available with 3 different ADFs your choice!
- A European legend!



| TECHNICAL DATA | GDS | ES | DS |
|------------------------|---------------------------------|--------------|-----------|
| Filter Lens | J9927 | J9928 | J9929 |
| Viewing Area | | 96 x 68.5 mm | |
| Hard Hat Option | | yes | |
| Optical Clarity | | 1/1/1/1 | |
| Weight | 565 g | 560 g | 520 g |
| Open State Shade | | 4 | |
| Closed State Shade | 6-8/9-13 | 9-13 | 9-13 |
| Shade Adjustment | yes / ext | yes / ext | yes / int |
| Sensitivity Adjustment | yes / ext | yes / ext | yes / int |
| Delay Adjustment | yes / ext | yes / ext | yes / int |
| Grinding Mode | yes / ext | no | no |
| Switching Time | | 0.15 ms | |
| Energy Supply | solar cells + 2x Li-ion battery | | |

POSSIBLE UPGRADES

- Hard hat combination
- Flip front option for grinding (110 x 90 mm clear grinding glass with shade 10 mineral glass optional)
- Magnifying lenses 107 x 51 mm (1.0, 1.25, 1.5, 1.75, 2.0, 2.5)









- SMAW -







C€ RK

WH70


| Product No | Description | Case Qty/MOQ |
|------------|--|--------------|
| J9914 | WH70 Welding Helmet with Grand DS ADF | 1 |
| J9915 | WH70 Welding Helmet with Grand ES ADF | 1 |
| J9916 | WH70 Welding Helmet with Grand GDS ADF | 1 |
| J9912 | WH70 Replacement Shell for INT ADF | 1 |
| J9913 | WH70 Replacement Shell for EXT ADF | 1 |

| Product No | Description | Case Qty/MOQ |
|------------|----------------------------|--------------|
| J5233 | Concept hard hat | 4 |
| J5234 | Hard hat adaptor set | 1 |
| J5243 | Hard hat sweat band | 2 |
| J9940 | Flip front kit 110 x 90 mm | 1 |
| J9941 | Flip front kit 108 x 51 mm | 1 |
| J8570 | 370 head gear | 1 |
| J5237 | 370 sweat band | 2 |
| J9931 | Outer lens 147 x 125 mm | 10 |
| J9932 | Inner lens 107.5 x 71.5 mm | 10 |
| J9934 | Washer set | 1 |
| J9936 | Mag lens holder | 1 |
| J9942 | Leather neck protection | 1 |



GRAPHIC WELDING HELMETS

Premium Auto Darkening Welding Helmets

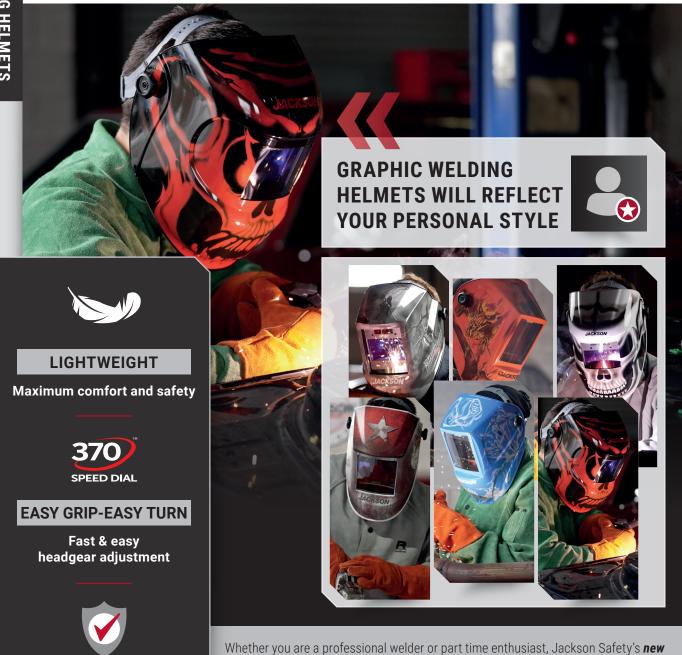

graphic style auto darkening helmets will reflect your personal style while allowing you to perform at your best. Choose from a variety of options including viewing size, switching speeds, shade ranges, and more. Hallmark advantages like the **370 Speed Dial™** ratcheting headgear system, *ultra-lightweight design*, and *world* class optics are just a few of the reasons why Jackson Safety® continues to set the standard in premium welding helmets.



OPTIMUM SAFETY

Rated impact

resistance



6 FEET UNDER

- Lightweight and ergonomically balanced to reduce stress and fatigue
- 4 arc sensors provide maximum eye protection and coverage
- Excellent switching speeds 0,15 ms minimizes eyestrain
- Extended front increases protection from sparks and slag
- Packaged in an attractive full-color box
- CE and UKCA certified, meets or exceeds ANSI Z87.1 and CAN/CSA Z94.3 standards



| Filter Dimensions | 114x133mm |
|-------------------|------------------------|
| Viewing Area | 100x60mm |
| Optical Clarity | 1/1/1/1 |
| Shade Range | 3/10 |
| True Color | Yes |
| Modes | Welding |
| ADF Weight | 116g |
| Total Weight | 571g |
| No. of Sensors | 4 |
| TIG Rating | 20A |
| Switching Speed | 0.15 ms |
| Warranty | 2 Years |
| Energy Supply | Solar & CR2032 battery |









GTAW -20 Amp

MMA - SMAW -

PWA

· IIK



6 FEET UNDER

| Product No | Description | Case Qty/MOQ |
|------------|--------------------------------------|--------------|
| 47100 | 6 FEET UNDER, Graphic Welding Helmet | 4 |

| Product No | Description | Case Qty/MOQ |
|------------|--|--------------|
| 47100-1 | Replacement ADF - 6 FEET UNDER | 1 |
| 47100-4 | External protective lens (114.3 x 133.35 mm) | 10 |
| 47105-3 | Internal protective lens (105.4 x 65.4 mm) | 10 |
| 20693 | Headgear 370 | 1 |
| J5237 | Sweat Band | 2 |





FREEDOM

- Lightweight and ergonomically balanced to reduce stress and fatigue
- 4 arc sensors provide maximum eye protection and coverage
- Excellent switching speeds 0,15 ms minimizes eye-
- Extended front increases protection from sparks and slag
- Comes complete with an internal grind mode
- Advanced digital controls provide intuitive interface
- Packaged in an attractive full-color box
- CE and UKCA certified, meets or exceeds ANSI Z87.1 and CAN/CSA Z94.3 standards

| Lic is on | |
|-----------|--|

| Filter Dimensions | 114x133mm | |
|-------------------|----------------------------|--|
| Viewing Area | 100x60mm | |
| Optical Clarity | 1/1/1/1 | |
| Shade Range | 4/5-13 | |
| True Color | Yes | |
| Modes | Grinding, Cutting, Welding | |
| Controls | Digital | |
| ADF Weight | 170g | |
| Total Weight | 562g | |
| No. of Sensors | 4 | |
| TIG Rating | 3A | |
| Switching Speed | 0.15 ms | |
| Warranty | 2 Years | |
| Energy Supply | Solar & CR2450 battery | |



GTAW -



- SMAW









FREEDOM

| Product No | Description | Case Qty/MOQ |
|------------|---------------------------------|--------------|
| 47103 | FREEDOM, Graphic Welding Helmet | 4 |

| Product No | Description | Case Qty/MOQ |
|------------|--|--------------|
| 47103-1 | Replacement ADF - FREEDOM | 1 |
| 47100-4 | External protective lens (114.3 x 133.35 mm) | 10 |
| 47105-3 | Internal protective lens (105.4 x 65.4 mm) | 10 |
| 20693 | Headgear 370 | 1 |
| J5237 | Sweat Band | 2 |







REAPERS N' ROSES

- Lightweight and ergonomically balanced to reduce stress and fatigue
- 4 arc sensors provide maximum eye protection and coverage
- Excellent switching speeds 0,2 ms minimizes eyestrain
- Extended front increases protection from sparks and
- Packaged in an attractive full-color box
- CE and UKCA certified, meets or exceeds ANSI Z87.1 and CAN/CSA Z94.3 standards



| Filter Dimensions | 114x133mm |
|-------------------|----------------------------|
| Viewing Area | 100x67mm |
| Optical Clarity | 1/1/1/1 |
| Shade Range | 3/10 |
| Modes | Welding |
| ADF Weight | 133g |
| Total Weight | 571g |
| No. of Sensors | 4 |
| TIG Rating | >2A |
| Switching Speed | 0.2 ms |
| Warranty | 2 Years |
| Energy Supply | Solar & 2 CR2032 batteries |
| | |









C€ KK

REAPERS N' ROSES

| Product No | Description | Case Qty/MOQ |
|------------|--|--------------|
| 47104 | REAPERS N' ROSES, Graphic Welding Helmet | 4 |

SPARE PARTS & ACCESSORIES

| Product No | Description | Case Qty/MOQ |
|------------|--|--------------|
| 47104-1 | Replacement ADF - REAPERS N' ROSES | 1 |
| 47100-4 | External protective lens (114.3 x 133.35 mm) | 10 |
| 47104-3 | Internal protective lens (103.5 x 69.2 mm) | 10 |
| 20693 | Headgear 370 | 1 |
| J5237 | Sweat Band | 2 |



Extra large



HELLFIRE

- Lightweight and ergonomically balanced to reduce stress and fatigue
- 4 arc sensors provide maximum eye protection and coverage
- Excellent switching speeds 0,2 ms minimizes eye-
- Extended front increases protection from sparks and slag
- Comes complete with an internal grind mode
- Analog controls allow quick and easy functionality
- Packaged in an attractive full-color box
- CE and UKCA certified, meets or exceeds ANSI Z87.1 and CAN/CSA Z94.3 standards

| Filter Dimensions | 114x133mm | |
|-------------------|----------------------------|--|
| Viewing Area | 100x92mm | |
| Optical Clarity | 1/1/1/1 | |
| Shade Range | 3/5-13 | |
| Modes | Grinding, Cutting, Welding | |
| Controls | Analog | |
| ADF Weight | 141g | |
| Total Weight | 571g | |
| No. of Sensors | 4 | |
| TIG Rating | >2A | |
| Switching Speed | 0.2 ms | |
| Warranty | 2 Years | |
| Energy Supply | Solar & 2 CR2032 batteries | |





- GTAW -

> 2 Amp



- SMAW -







C€ KK

HELLFIRE

| Product No | Description | Case Qty/MOQ |
|------------|----------------------------------|--------------|
| 47101 | HELLFIRE, Graphic Welding Helmet | 4 |

| Product No | Description | Case Qty/MOQ |
|------------|--|--------------|
| 47101-1 | Replacement ADF - HELLFIRE | 1 |
| 47100-4 | External protective lens (114.3 x 133.35 mm) | 10 |
| 47101-3 | Internal protective lens (103.5 x 95.5 mm) | 10 |
| 20693 | Headgear 370 | 1 |
| J5237 | Sweat Band | 2 |







GRAY MATTER

- Lightweight and ergonomically balanced to reduce stress and fatigue
- Excellent switching speeds 0,1 ms minimizes eyestrain
- Extended front increases protection from sparks and slag
- Packaged in an attractive full-color box
- CE and UKCA certified, meets or exceeds ANSI Z87.1 and CAN/CSA Z94.3 standards



| Filter Dimensions | 110x90mm |
|-------------------|------------------------|
| Viewing Area | 96x42mm |
| Optical Clarity | 1/1/1/1 |
| Shade Range | 3/10 |
| True Color | Yes |
| Modes | Welding |
| ADF Weight | 68g |
| Total Weight | 453g |
| No. of Sensors | 2 |
| TIG Rating | 30A |
| Switching Speed | 0.1 ms |
| Warranty | 2 Years |
| Energy Supply | Solar & CR2032 battery |









TIG - GTAW -> 30 Amp

MMA - SMAW -

PWA

- GMAW -

CE RY

GRAY MATTER

| Product No | Description | Case Qty/MOQ |
|------------|-------------------------------------|--------------|
| 47102 | GRAY MATTER, Graphic Welding Helmet | 4 |

| Product No | Description | Case Qty/MOQ |
|------------|---|--------------|
| 47102-1 | Replacement ADF - GRAY MATTER | 1 |
| J8304 | External/Internal protective lens (110 x 90 mm) | 10 |
| 20693 | Headgear 370 | 1 |
| J5237 | Sweat Band | 2 |





BEAD DEMON

- Lightweight and ergonomically balanced to reduce stress and fatigue
- 4 arc sensors provide maximum eye protection and coverage
- Excellent switching speeds 0,15 ms minimizes eyestrain
- Extended front increases protection from sparks and slag
- Packaged in an attractive full-color box
- CE and UKCA certified, meets or exceeds ANSI Z87.1 and CAN/CSA Z94.3 standards

| Filter Dimensions | 110x90mm | | |
|-------------------|----------------------------|--|--|
| Viewing Area | 100x60mm | | |
| Optical Clarity | 1/1/1/2 | | |
| Shade Range | 4/9-13 | | |
| Modes | Grinding, Cutting, Welding | | |
| Controls | Analog/Knob | | |
| ADF Weight | 141g | | |
| Total Weight | 499g | | |
| No. of Sensors | 4 | | |
| TIG Rating | 3A | | |
| Switching Speed | 0.15 ms | | |
| Warranty | 2 Years | | |
| Energy Supply | Solar & CR2450 battery | | |





- SMAW -







MIG/MAG - GMAW -



BEAD DEMON

| Product No | Description | Case Qty/MOQ |
|------------|------------------------------------|--------------|
| 47105 | BEAD DEMON, Graphic Welding Helmet | 4 |

| Product No | Description | Case Qty/MOQ |
|------------|--|--------------|
| 47105-1 | Replacement ADF - BEAD DEAMON | 1 |
| J8304 | External protective lens (110 x 90 mm) | 10 |
| 47105-3 | Internal protective lens (105.4 x 65.4 mm) | 10 |
| 20693 | Headgear 370 | 1 |
| J5237 | Sweat Band | 2 |








Jackson Safety® Headgears

370 SPEED DIAL





Our patented Jackson Safety® 370 Speed Dial™ offers the fastest, easiest, and most efficient ratcheting headgear system in the industry today! The 370 Speed Dial™ incorporates two unique designs—an oversized "speed dial ratcheting adjuster knob, and a patented "quick-fit" rear headband that swivels up and down. Together, these two features combine to achieve a perfect fit every time, increasing safety, productivity and satisfaction. Try any of our industry-leading Jackson Safety® products that incorporate our famous 370 Speed Dial™ and experience the difference yourself!

- Engineered detents lock equipment in the up and down position and eliminate "creep"
- Fine tooth ratcheting mechanism guarantees a more precise fit without overtightening
- Lock-nut feature keeps components intact even when the bracket is loosened
- Three-position slider adjusts distance of the lens from your eyes for precise vision
- Extra wide replaceable fabric sweatband for maximum comfort and convenience

| Product No | Description | Case Qty/MOQ |
|------------|--|--------------|
| J8570 | 370 Speed Dial Headgear - for use with WH70 | 1 |
| 20693 | 370 Speed Dial Headgear - for use with Translight series | 1 |
| 20694 | 370 Speed Dial Headgear - for use with Quad 500 | 1 |
| 20695 | 370 Speed Dial Headgear - for use with Maxview and F4XP | 1 |
| J5237 | 370 sweat band | 2 |



EASY GRIP-EASY TURN

Rotation allows instant loosening and tightening of the headgear

The World's Greatest Ratcheting Headgear System



Oversized soft rubber adjuster dial

Easy to find and grab even when wearing gloves



Easy to adjust pin-lock upper adjustment band

Allows proper positioning of face shield



Patented "quick-fit" rear swivel headband

Quickly adjusts the suspension to the user's head for superior comfort, convenience, and productivity



WELDING FILTERS

SAFETY FIRST

CE certified

All ADFs are CE certified and most of them **exceed required protection** levels by large margin (switching speed, UV/IR protection).

Protection against UV and IR light

ADFs are designed so that regardless of dark or clear state welder's eyes are **always protected** against harmful UV and IR light occurring during welding process.

Excellent switching speed

Switching speed and detection of welding arc **prevent light flash** from reaching welder's eyes.

Safe in any weld process

Variable shade level, sensitivity and delay allow for *adjusting protection* parameters to any weld process.





EASE OF WORK

ADFs can be adjusted to any type of welding by selecting shade level, sensitivity to welding arc and opening time delay.

Selectable operation mode (Weld/ Grind/Cut) allows for permanent eye protection during the whole metal processing operation.

Increased productivity as both hands can be used.

Simple welding tasks

Mineral glass or single shade ADFs.

Entry level welding tasks

Limited shade range, average speed and window size – cost effective.

Professional tasks

All required features at moderate cost with added functionality.


Extremely demanding tasks

Highest optical performance, switching speed, sensitivity range and various modes of operation.

Ordering E-mail sales@jacksonsafety.eu
Customer Service +386 1 477 67 84
www.jacksonsafety.eu

Sure∨



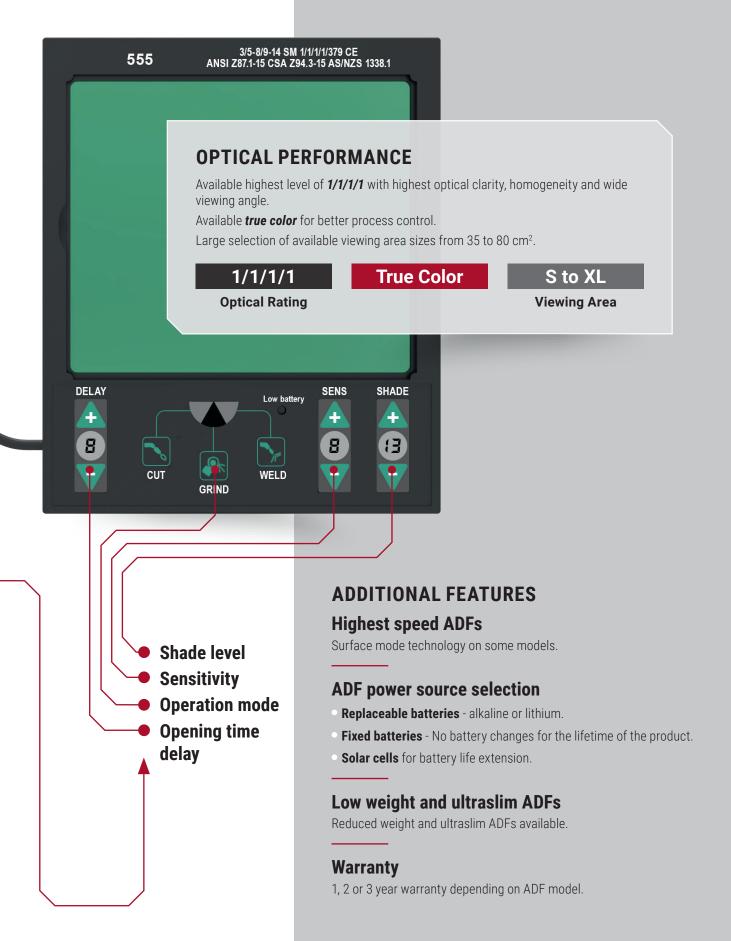



Jackson Safety® Welding Filters

RECOMMENDED SHADE LEVELS

For Various Welding Applications



















| Current (A) | Coated electrodes | MIG Heavy metals | MIG Light alloys | MAG | TIG | Gouging | PLASMA Cutting | PLASMA Welding |
|----------------|-------------------|---------------------|---------------------|-----|-----|---------|-------------------|-------------------|
| 1 | | | | | | | | |
| 2.5 | | | | | | | | 6 |
| 5 | 6 | | | | 8 | | | 7 |
| 10 | 7 | | | | | | | 8 |
| 20 | 8 | | | | 9 | | | 9 |
| 30 | 9 | | | | 10 | | | 10 |
| 40 | 9 | | | | 10 | | | 10 |
| 60 | 10 | | | | 44 | | | 44 |
| 80 | 10 | | | 9 | 11 | | 11 | 11 |
| 100 | | 10 | | 10 | 12 | | - 11 | 12 |
| 150 | 11 | 44 | 44 | 44 | | 10 | | |
| 175 | | 11 | 11 | 11 | 10 | 10 | | 10 |
| 200 | | | 10 | 10 | 13 | 44 | 10 | 13 |
| 225 | 10 | 10 | 12 | 12 | | 11 | 12 | |
| 250 | 12 | 12 | | 10 | | 10 | | |
| 300 | | | 13 | 13 | | 12 | | |
| 350 | | | | | | 13 | 13 | |
| 400 | 10 | 10 | | 14 | 14 | | | 14 |
| 450 | 13 | 13 | 14 | | | 14 | | |
| 500 | | | | | | | | |
| | 14 | 14 | 15 | 15 | | 15 | | |







Jackson Safety® Passive Welding Filters

PASSIVE WELDING FILTERS - MINERAL GLASS

- Passive welding filters are made of toughened mineral glass
 - 110 x 90 mm
 - Wide range of DIN shades 9, 10, 11, 12

| Product No | Description | Case Qty/MOQ |
|------------|--|--------------|
| J8101 | WF10 Welding Passive Filter 110 x 90 mm Shade 9 | 200 |
| J8102 | WF10 Welding Passive Filter 110 x 90 mm Shade 10 | 200 |
| J8103 | WF10 Welding Passive Filter 110 x 90 mm Shade 11 | 200 |
| J8104 | WF10 Welding Passive Filter 110 x 90 mm Shade 12 | 200 |






PC MAGNIFYING LENSES

- Designed for use with welding helmet filters
- Offers reliable protection for eyes from impact whilst offering + optics
- Available in wide range of diopters: 1.0, 1.5, 2.0, 2.5
- Special magnifying lens holder may be required





| Product No | Description | Case Qty/MOQ |
|------------|---|--------------|
| J2741 | Magnifying Lens 1.0 Clear (107 x 51 mm) | 6 |
| J2743 | Magnifying Lens 1.5 Clear (107 x 51 mm) | 6 |
| J2745 | Magnifying Lens 2.0 Clear (107 x 51 mm) | 6 |
| J2747 | Magnifying Lens 2.5 Clear (107 x 51 mm) | 6 |





ADFs

| | GO | OD | | BETTER | | | |
|----------------------------|--------------------|--------------------|--------------------------|--------------------------|--------------------------|--------------------------|--|
| Filter name | WF20 ES | DUO | REBEL | | TRANSLIGHT | | |
| | • • • | • • • | | 355 | 455 | 555 | |
| | | | | | 強ついる。 | | |
| Product No | - | J7180 | 46200 | 46432 | 46442 | 46452 | |
| Compatible shell | WH20 ASPIRE | WH25 DUO | - | TRANSLIGHT 355 | TRANSLIGHT FLIP 455 | TRANSLIGHT+ 555 | |
| Outer protective lens | J8319 | J7176 | 46930 (Lens Kit: | 46923 | 46923 | 46925 | |
| Inner protective lens | J8302 | J7177 | 5 Ext., 3 Int.) | 46914 | 46914 | 46915 | |
| Cartridge size | 110 x 90 mm | 110 x 90 mm | 108 x 51 mm | 110 x 90 mm | 110 x 90 mm | 114 x 133 mm | |
| Viewing window | 100 x 41 mm | 93 x 42 mm | 90 x 35 mm | 98 x 62 mm | 98 x 62 mm | 98 x 82 mm | |
| View window sq in | 41 sq cm | 39 sq cm | 31 sq cm | 60 sq cm | 60 sq cm | 80 sq cm | |
| Shade range | 4/9-13 | 4/9-13 | 3/5-12 | 3/5-8/9-14 | 4/5-8/9-13 | 3/5-8/9-14 | |
| Switching time RT | 0.4 ms | 0.3 ms | 0.1 ms | 0.25 ms | 0.1 ms | 0.2 ms | |
| Clearing time | 0.2 - 0.8 s | 0.1 - 0.8 s | 0.2 - 0.8 s | 0.1 - 0.9 s | 0.1 - 1.0 s | 0.1 - 0.9 s | |
| Sensors | 2 | 2 | 2 | 4 | 4 | 4 | |
| True Color | Yes | Yes | Yes | Yes | Yes | Yes | |
| Optical clarity | 1/1/1/2 | 1/1/1/2 | 1/1/1/2 | 1/1/1/1 | 1/1/1/1 | 1/1/1/1 | |
| Shade adjustment | • | • | • | • | • | • | |
| Sensitiviy adjustment | • | • | • | • | • | • | |
| Delay adjsutment | • | • | • | • | • | • | |
| Welding | • | | • | • | | | |
| Grinding | - | | _ | • | | | |
| Cutting | - | - | - | • | - | | |
| TIG > 20 amps | • | • | • | • | • | | |
| TIG < 20 amps | - | - | • | • | • | • | |
| Battery type | Lithium - Fixed | Lithium - Fixed | Lithium - Replaceable | Lithium - Replaceable | Lithium - Replaceable | Lithium - Replaceable | |
| Sollar cells | • | • | • | • | | • | |
| 370 Speed Dial Headgear | - | - | - | • | • | • | |
| Special Features | - | - | 4.7 mm optics | Thin 3.9 mm optics | Thin 3.5 mm optics | 4.9 mm optics | |
| Warranty | 1 Year | 1 Year | 2 Years | 3 Years | 3 Years | 3 Years | |





BEST

| ADFs FOR GRAPHIC WELDING HELMETS | | | | | | | BALDER° TECHNOLOGY | |
|----------------------------------|--------------------------|--------------------------|--------------------------|--|--------------------------|--|--|------------------------|
| 6 FEET UNDER | HELLFIRE | GRAY MATTER | FREEDOM | REAPERS N' ROSES | BEAD DEMON | WF70 DS 4/9-13 | WF70 ES 4/9-13 | WF70 GDS 4/6-8/9-13 |
| | 2000. | ACTO PARTIENDS | | ACCEST CONTRACTOR CONT | | to the section of the sec | ************************************** | The Talent |
| 47100-1 | 47101-1 | 47102-1 | 47103-1 | 47104-1 | 47105-1 | J9929 | J9928 | J9927 |
| 6 FEET UNDER | HELLFIRE | GRAY MATTER | FREEDOM | REAPERS N' ROSES | BEAD DEMON | WH70 | WH70 | WH70 |
| 47100-4 | 47100-4 | J8304 | 47100-4 | 47100-4 | J8304 | J9931 | J9931 | J9931 |
| 47105-3 | 47101-3 | J8304 | 47105-3 | 47104-3 | 47105-3 | J9932 | J9932 | J9932 |
| 114 x 133 mm | 114 x 133 mm | 110 x 90 mm | 114 x 133 mm | 114 x 133 jmm | 110 x 90 mm | 110 x 110 mm | 110 x 110 mm | 110 x 110 mm |
| 110 x 60 mm | 100 x 92 mm | 96 x 42 mm | 100 x 60 mm | 100 x 67 mm | 100 x 60 mm | 96 x 68.5 mm | 96 x 68.5 mm | 96 x 68.5 mm |
| 60 sq cm | 92 sq cm | 40 sq cm | 60 sq cm | 67 sq cm | 60 sq cm | 66 sq cm | 66 sq cm | 66 sq cm |
| 3/10 | 3/5-13 | 3/10 | 4/5-13 | 3/10 | 4/9-13 | 4/9-13 | 4/9-13 | 4/6-8 /9-13 |
| 0.15 ms | 0.2 ms | 0.1 ms | 0.15 ms | 0.2 ms | 0.15 ms | 0.15 ms | 0.15 ms | 0.15 ms |
| 0.4 s | 0.15 - 0.8 s | 0.4 s | 0.1 - 0.9 s | 0.06 - 0.6 s | 0.1 - 0.9 s | 0.1 - 1.0 s | 0.1 - 1.0 s | 0.1 - 1.0 s |
| 4 | 4 | 2 | 4 | 4 | 4 | 2 | 2 | 2 |
| Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| 1/1/1/1 | 1/1/1/1 | 1/1/1/1 | 1/1/1/1 | 1/1/1/1 | 1/1/1/2 | 1/1/1/1 | 1/1/1/1 | 1/1/1/1 |
| | | | | | | | | |
| - | • | - | | - | | • | • | • |
| - | • | - | • | - | • | • | • | • |
| - | | - | | - | | • | • | • |
| | | | | | | • | • | • |
| - | | - | | - | | - | - | • |
| - | | - | • | - | | - | - | - |
| | | | | | | • | • | • |
| - | | - | | | | • | • | • |
| Lithium - Replaceable | Lithium - Replaceable | Lithium - Replaceable | Lithium - Replaceable | Lithium - Replaceable | Lithium - Replaceable | Lithium - Fixed | Lithium - Fixed | Lithium - Fixed |
| | | • | | | | | • | • |
| | | • | | • | • | • | • | • |
| - | - | - | - | - | - | | echnology to optimi plar based, lightweig | |
| 2 Years | 2 Years | 2 Years | 2 Years | 2 Years | 2 Years | 3 Years | 3 Years | 3 Years |

HEALTH SAFETY PRODUCTIVITY

75

WELDING BLANKETS



How do I choose the right welding blanket for the job?

With so many different materials, sizes and functions, it's very difficult to decide what type of welding blanket you might need for the job. When you are unsure of the right style for you, it's good to start with some basic questions:

What temperatures are you working with?

- Working Temperature The maximum temperature a blanket can withstand for the entire duration of the application. Sometimes this is referred to as "service temperature" or "constant temperature."
- Intermittent Temperature The temperature the fabric can withstand for short durations without damage.

What should I know about different fiberglass coatings?

There are many different coatings available each with its own specific properties. Listed below are some of the most common styles:

PU

Fiberglass uncoated

Vermiculite

- · Enhanced abrasion and tear resistance
- Soft to the touch
- Easy to cut and can conform to complex curves
- Lightweight and soft material
- Advanced abrasion resistance
- Can be used without gloves

Which welding blankets are best for vertical and horizontal use?

Lighter duty welding blankets can be used vertically to offer protection against welding sparks and slag. If you are using a blanket horizontally or flat, it is recommended to use a heavier-duty blanket with a higher maximum temperature as the spatter has the potential to rest directly on the material.









| | LIGHT DUTY | | MEDIUM DUTY | HEAVY DUTY |
|----------------|--|--|---|--|
| Product Series | Uncoated Fiberglass Blanket | Fiberglass PU Coated Blanket | Vermiculite Blanket | Silica Cloth Blanket |
| Working Temp | 550°C | 550°C | 650°C | 1000°C |
| Colors | White | Grey | Black | Tan |
| Weight | 612g (18oz) | 470g (14oz) | 816g (24oz) | 680g (20oz) |
| Applications | Heat treating, low thermal conductivity, anti corrosion, and is a base material for coating, impregnating and laminating | Slag resistance, spark resistance and incidental resistant to flames from cutting torches | Abrasion resistance, thermal barrier | Used for thermal and high heat requirements; can be used at 1000°C, maximum at 1300°C |

NOTE: Temperatures and applications are intended as a guideline only and not a guarantee of performance. SureWerx recommends the use of welding blankets in multiple layers to attain proper molten metal and radiant heat protection. It is the user's responsibility to monitor the activity and use of blankets/high-heat materials at all times. The user must inspect the blankets before use. Abnormal wear and tear should be removed from service





UNCOATED FIBERGLASS BLANKET

- Low irritating yarns prevents itch
- Grommets allow easy hanging in vertical applications
- 550°C working temperature / 700°C maximum temperature

| Product No | Product Type | Width | Length | Thickness | Case Qty/MOQ |
|------------|--------------|-------|--------|-----------|--------------|
| J2711 | Blanket | 1 m | 1 m | 0.75 mm | 20 |
| J2712 | Blanket | 1 m | 2 m | 0.75 mm | 10 |
| J2713 | Blanket | 2 m | 2 m | 0.75 mm | 5 |
| J2714 | Blanket | 3 m | 2 m | 0.75 mm | 5 |
| J2715 | Roll | 1 m | 25 m | 0.75 mm | 1 |

LIGHT DUTY PROTECTION

Ideal for welding, insulation, and jacketing applications

FIBERGLASS PU COATED BLANKET

- Excellent abrasion and tear resistance
- Grommets allow easy hanging in vertical applications
- 550°C working temperature / 700°C maximum temperature

| Product No | Product Type | Width | Length | Thickness | Case Qty/MOQ |
|------------|--------------|-------|--------|-----------|--------------|
| J2716 | Blanket | 1 m | 1 m | 0.47 mm | 20 |
| J2717 | Blanket | 1 m | 2 m | 0.47 mm | 10 |
| J2718 | Blanket | 2 m | 2 m | 0.47 mm | 5 |
| J2719 | Blanket | 2 m | 3 m | 0.47 mm | 5 |
| J2720 | Roll | 1 m | 25 m | 0.47 mm | 1 |

LIGHT DUTY PROTECTION

Provides protection from most welding sparks, spatter and slag

VERMICULITE BLANKET

- Advanced abrasion resistant properties
- Grommets allow easy hanging in vertical applications
- 650°C working temperature / 800°C maximum temperature
- Heat is dispersed evenly across the surface significantly boosting temperature rating

| Product No | Product Type | Width | Length | Thickness | Case Qty/MOQ |
|------------|--------------|-------|--------|-----------|--------------|
| J2721 | Blanket | 1 m | 1 m | 1 mm | 20 |
| J2722 | Blanket | 2 m | 1 m | 1 mm | 10 |
| J2723 | Blanket | 2 m | 2 m | 1 mm | 5 |
| J2724 | Blanket | 3 m | 2 m | 1 mm | 5 |
| J2725 | Roll | 1 m | 25 m | 1 mm | 1 |

MEDIUM DUTY PROTECTION

Ideal for welding, furnace applications, pipe wrapping and machinery protection

SILICA CLOTH BLANKET

- Pliable material can easily wrap around complex curves
- Grommets allow easy hanging in vertical applications
- 1000°C working temperature / 1300°C maximum temperature
- Protection from heavy duty slag and molten spatter

| Product No | Product Type | Width | Length | Thickness | Case Qty/MOQ |
|------------|--------------|---------|--------|-----------|--------------|
| J2726 | Blanket | 0.94 m | 1 m | 0.60 mm | 20 |
| J2727 | Blanket | 1 m | 1.76 m | 0.60 mm | 10 |
| J2728 | Blanket | 2 m | 1.76 m | 0.60 mm | 5 |
| J2729 | Blanket | 3 m | 1.76 m | 0.60 mm | 5 |
| J2730 | Roll | 0.914 m | 25 m | 0.60 mm | 1 |

HEAVY DUTY PROTECTION



Ideal for use as a heat shield, furnace blanket, extreme welding applications and other thermal barrier needs

HEALTH SAFETY PRODUCTIVITY

WELDING **CURTAINS**



ADVANTAGES OF TRANSPARENT WELDING CURTAINS



UV Protection

Protects bystanders from UV and blue light radiation.



Minimizes noise

Creates a sound barrier to minimize noise discomfort and the risk of hearing impairment for nearby workers.



Clear division

Creates a designated space specifically for welding operations while still maintaining visibility.



Injury prevention

Prevents sparks and spatter from injuring bystanders while selfextinguishing properties keep the curtain from burning.



Easy installation

Curtains come grommeted, and when used with frames, are easily hung and can be rearranged.



Reduced fumes and vapors

Creates a containment barrier that allows for more efficient fume extraction.



Built with grommets for easy hanging



Durable material resists tearing



Flame, mildew, and water resistant



All curtains meet or exceed California Fire Marshall standards or NFPA 701 requirements for flame resistance



Available in orange and green 14-mil transparent material







Jackson Safety® Welding Curtains




- Puts light back into the welding area to help increase worker productivity
 - Can be used around MIG, TIG, arc, and plasma operations
 - Excellent for use in assembly areas



| Product No | Width | Length | Weight (per sq m) | Thickness | Color | Amp Usage | Case Qty/MOQ |
|---------------|------------|------------|----------------------|-----------|--------|-------------|--------------|
| 36307 | 6' (1.8 m) | 8' (2.4 m) | 13 oz. | .014" | Orange | Medium-High | 12 |
| 36292 | 6' (1.8 m) | 6' (1.8 m) | 13 oz. | .014" | Orange | Medium-High | 12 |
| 37606 | 6' (1.8 m) | 4' (1.2 m) | 13 oz. | .014" | Orange | Medium-High | 12 |

Why Choose Green?

- Decreases total light from the welding arc
 - Ideal when visibility and light reduction are necessary



| Product No | Width | Length | Weight (per sq m) | Thickness | Color | Amp Usage | Case Qty/MOQ |
|---------------|------------|------------|----------------------|-----------|-------|-------------|--------------|
| 36315 | 6' (1.8 m) | 8' (2.4 m) | 13 oz. | .014" | Green | Medium-High | 12 |
| 36299 | 6' (1.8 m) | 6' (1.8 m) | 13 oz. | .014" | Green | Medium-High | 12 |
| 37700 | 6' (1.8 m) | 4' (1.2 m) | 13 oz. | .014" | Green | Medium-High | 12 |

WELDING CURTAIN FRAME

- Bolted corner clamps for extra stability
 - Pre-drilled holes for casters
 - 19-gauge steel construction ideal
 - Powder coated enamel finish for excellent rust and abrasion resistance for daily rigorous use
 - Platform "T" legs reduce slipping and twisting of the unit



Stur-D-Screen frames and recommended curtains

| Frame Only | Frame Size | Orange | Green |
|------------|------------------------------------|-------------|-------------|
| 36335 | 6' x 4' (1.8 x 1.2 m) Single Panel | 37606 | 37700 |
| 36336 | 6' x 6' (1.8 x 1.8 m) Single Panel | 36292 | 36299 |
| 36338 | 6' x 8' (1.8 x 2.4 m) Single Panel | 36307 | 36315 |
| 37198 | Adjustable 6' x 6' to 6' x 8' | 36292/36307 | 36299/36315 |

| Product No | Description | Box Count |
|------------|---|-----------|
| 36687 | Optional hooks for attaching curtains or blankets to welding frames | 10 |

TOOLS CURV-O-MARK



PIPE AND TOOL MARKING ACCESSORIES

Curv-o-mark layout tool and systems have earned a reputation for quality and consistency across a wide range of industries. Easy to use and made for an extended working life, these are tools to help bring precision to any layout task.

PIPE MARKERS

CURV-O-MARK®

LEVELS AND FLANGE ALIGNING TOOLS

WRAP-A-ROUND



EASY TO USE

For a wide range of industries



DURABILITY

Extended working life



PRECISION

For any layout task

A / Eine / Une Marque / Una Marca / Un Marchio



Ordering E-mail sales@jacksonsafety.eu
Customer Service +386 1 477 67 84
www.jacksonsafety.eu

CURV-O-MARK®

Jackson Safety® Measuring and Marking Tools

PIPE MARKERS

CENTERING HEAD - MAGNETIC FOR THOSE DIFFICULT ANGLES

- Fitted with an **adjustable dial bubble protractor**, this timeefficient mechanism can be used to locate and mark centre points on a pipe or specific angles.
- The PipePro Centring Head has been engineered with a "Y" shaped body design and a 2-1/2° increment degree-dial that rotates 360°'s.
- The centre pin has been produced using **CNC manufactured Hardened** and **tempered Carbon Steel**.
- Magnets in the legs allow a **hands-free approach**, encouraging a safer and more accurate layout mark.

| Product No | Description | Case Qty/MOQ |
|------------|----------------------------------|--------------|
| J1979 | PipePro Centering head AL medium | 1 |
| J1980 | PipePro Centering head AL large | 1 |





LEVELS AND FLANGE ALIGNING TOOLS

MULTI ANGLE SPIRIT LEVEL - MAGNET CLAMPING

- The PipePro Spirit Level is a lightweight, durable and multi purpose level
 which includes an adjustable protractor dial and magnetic base to easily
 determine and set up angles.
- There are **two stationery vials** placed at 90° angles of each other which can be read from any surface of the level.
- This level has a **12" ruler** along its base for easy and precise measurements.
- Magnets on the bottom of the level allow a **hands-free approach**, encouraging a safer and more accurate work environment.

| Product No | Description | Case Qty/MOQ |
|------------|------------------------|--------------|
| J1981 | PipePro Aluminum level | 1 |

Magnetic //



FLANGE ALIGNMENT TOOL WITH VIAL LEVEL

- The PipePro Flange Alignment Tool is a **multifaceted pipefitting tool** used for alignment and finding/setting angles. Flange pins included.
- The Pipe Flange Aligner saves valuable fit-up time (up to 50% more efficient) while eliminating the frustration of balancing a level on the pins.
- Produced using CNC manufactured Hardened and tempered Carbon Steel.
- **Bubble vials** in both the pins and straight bar allow for perfect alignment.

| Product No | Description | Case Qty/MOQ |
|------------|-----------------------------|--------------|
| J1982 | PipePro Flange Aligner Tool | 1 |





PIPE MARKERS

CONTOUR MARKERS

The Contour Marker consists of an X frame, calibrated protractor, and a triple-jointed marking arm adjustable to the line to be scribed. A soapstone crayon is required for each radius marker (not supplied). Contour marker is a compact tool design, time saving tool used to lay out pipe and structural steel joints. Ideal for quick precise layout of laterals at any angle, tees, wyes, crosses, elbows - any type or size of joint (for use on same size pipe intersections). Eliminates mathematical formulas. Can be used to lay out pipe from 1-1/2" (3.8 cm) to 18" (45.7 cm) diameter or structural steel members up to 18" (45.7 cm) in a right side up or upside down position.

| EU Prod. No | US Prod. No | Description | Pipe Diameter | Case Qty/ MOQ |
|----------------|----------------|---------------------|---|------------------|
| J1874 | 14771 | #1 Marker standard | 1.5" (3.8 cm) to 18" (45.7 cm) diameter | 1 |
| J1875 | 14772 | #2 Adaptor standard | Use with #1 Contour Marker | 1 |
| J1877 | 14773 | #4 Marker jumbo | 8" (20.3 cm) to 48" (121.9 cm) diameter | 1 |
| J1878 | 14774 | #5 Adaptor jumbo | Use with #4 Contour Marker | 1 |



RADIUS MARKERS

Radius Markers have sturdy friction joints to maintain rigidity and accuracy, and are made from lightweight, rustproof aluminium for extended life. A soapstone crayon is required for each radius marker. Models available in 4 sizes for scribing circles up to 80°.

| US Prod. No | Description | Pipe Diameter | Case Qty/ MOQ |
|----------------|----------------------------|--|--|
| 14780 | Radius marker mini | Up to 8" (20.3 cm) in radius | 1 |
| 14781 | Radius marker small | Up to 20" (50.8 cm) in radius | 1 |
| 14782 | Radius marker standard | Up to 24" (61 cm) in radius | 1 |
| 14783 | Radius marker jumbo | Up to 40" (101.6 cm) in radius | 1 |
| | Prod. No 14780 14781 14782 | Prod. No Description 14780 Radius marker mini 14781 Radius marker small 14782 Radius marker standard | Prod. No Description Pipe Diameter 14780 Radius marker mini Up to 8" (20.3 cm) in radius 14781 Radius marker small Up to 20" (50.8 cm) in radius 14782 Radius marker standard Up to 24" (61 cm) in radius |

CENTERING HEADS

Centering Heads aid in the settings of centerlines, establishing angles and marks for butt-ins, locating points inside pipes and tanks, laying out keyways and measuring declivity.


| EU Prod. No | US Prod. No | Description | Pipe Diameter | Case Qty/ MOQ |
|----------------|----------------|----------------------------|---|------------------|
| J1879 | 14775 | #6 Centering head standard | 1/2" (1.3 cm) to 4" (10.2 cm) diameter | 1 |
| J1880 | 14776 | #7 Centering head jumbo | 1" (2.5 cm) + diameter | 1 |













A / Eine / Une Marque / Una Marca / Un Marchio



Jackson Safety® Measuring and Marking Tools



PROTRACTOR

This 90-degree protractor has a matching locking lever to set and hold the tool at the desired angle. It is equipped with a 5/8 in. by 10 in. tapered arm to complete finding of angles or desired bends, or to determine any portions of elbows. The tool is mounted in a 3/4-in wide frame with a 3/8-in. by 6-in cast-in rod It comes with a 25-pound pull magnetic base for holding the protractor frame in position. The unit can be used manually or with a magnetic base.

| EU Product No | US Product No | Description | Case Qty/MOQ |
|---------------|---------------|-------------|--------------|
| J1882 | 14778 | Protractor | 1 |



CIRCLE ECLIPSE PROJECTOR

Ideal for creating perfect circles, ellipses or oblong circles on any irregular flat or round surface. Can be used to lay out lateral intersections of different diameter pipes, or to project circles from 1-1/2" to 18" diameter on flat surfaces intersecting at angles from 0-70 degree from vertical. Features a protractor with sliding rod and an adjustable lever to lock in the specified layout. Strong, 20-pound pull magnetic base holds the Projector in position during layout. Durable web strap (included) holds the unit secure on non-magnetic surfaces and can be used on either side of the vertical column. The Projector is equipped with a soapstone crayon and also works with chalk, pencil or steel scribe.

| EU Product No | US Product No | Description | Case Qty/MOQ |
|----------------------|---------------|--------------------------|--------------|
| J1888 | 14784 | Circle eclipse projector | 1 |



MULTI TRAMMEL HEADS

Using standard half inch pipe as a trammel bar, heads feature radius set points cast in alignment with marking pointers for easy setting. Equipped with 1/4" (0,6 cm) screws and squared on the back side of perpendicular alignment. The stationary head holds a 1/4" (0,6 cm) case hardened center point. Moveable head has a 1/8" (0,3 cm) steel scribe hardened. Marks from 1-1/2" circle to any diameter needed, depending on length of pipe used as a trammel bar. Allen wrench, soapstone, scribe and pointer also included.

| EU Prod. No | US Prod. No | Description | Pipe Diameter | Case Qty/MOQ |
|-------------|-------------|-------------------------|---------------|--------------|
| J1890 | 14785 | #19 Multi trammel heads | All | 1 |



LEVELS AND FLANGE ALIGNING TOOLS

PRO-MAG LEVEL

A lightweight, easy to use tool for determining angles. Unit is ideal for the pipe fitter, welder, jig builder or anyone who has to determine angles or do setup work. Includes two cast-in 25-pound (11.3 kg) pull magnets that hold securely to any steel surface. Unit has a 360° adjustable DSL with two 90° quadrants graduated in 2-1/2° increments. Cast in tables are used to convert degree-of-angle to rise-in-inches-per-foot or millimeters-per-meter. A groove on the bottom edge permits use on a small pipe.







DIAL ANGLE FLANGE LEVEL

A versatile tool that can be used as a dial degree utility level or, with attachments, for two holding flange alignment.

| EU Prod. No | US Prod. No | Description | Case Qty/MOQ |
|-------------|-------------|--|--------------|
| J1891 | 14786 | #20 Dual-Angle Flange Level—Nonmagnetic; can be used on PVC Pipe | 1 |



UNIVERSAL LEVEL

Universal level is a multi-purpose tool that features a 360° adjustable protractor dial that ensures accurate leveling and permits setting a predetermined pitch of a string of pipe, setting the angle of laterals to a precise degree, trueing vertical runs & two-holding flanges. For structural steel workers, the powerful holding magnets provide an extra hand. Electricians will find the level useful in laying out and lining up heavy conduit.

| EU Prod. No | US Prod. No | Description | Case Qty/MOQ |
|-------------|-------------|---------------------|--------------|
| J1904 | 14796 | #33 Universal Level | 1 |



PIPE FLANGE ALIGNER

Fast, accurate pipe construction is possible with this self-determining flange aligning tool. The Aligner inserts easily into pipe, centers snugly against the inside pipe diameter and automatically aligns with the pipe axis.

| EU Prod. No | US Prod. No | Description | Case Qty/MOQ |
|-------------|-------------|-------------------------|--------------|
| J1883 | 14779 | #10 Pipe Flange Aligner | 1 |



UNIVERSAL LEVEL

The DSL is an adjustable bubble protractor used with a number of Curv-O-Mark Tools. The protractor covers 180 degrees through two 90 degree quadrants, reading in 2.5 degree increments. The bubble is cast in the aluminium dial.

| EU Prod. No | US Prod. No | Description | Pipe Diameter | Case Qty/MOQ |
|-------------|-------------|---------------------------------|---------------------------------|--------------|
| J1905 | 14797 | Contour Dial-Set-Level (DSL) | Adjustable Bubble Protractor | 1 |



FLANGE ALIGNER BASE


Removes the difficulty of flange aligning and squaring. Tool holds a square in the needed position without tying up one's hands. Base is notched at either end for ease in aligning on the center line of the pipe. Two 25-pound (11.3 kg) pull, cast-in magnets for holding either a flat horizontal or vertical position. Base accepts either leg of a standard or combination aluminum square and works on pipe diameters from 1"+, requiring only the extension of the legs of the square being used to accommodate larger diameters.

| EU Prod. No | US Prod. No | Description | Case Qty/MOQ |
|-------------|-------------|-------------------------|--------------|
| J1903 | 14795 | #32 Flange Aligner Base | 1 |



J1903







CENTERING PIN


A hardened steel pin for use with the standard centering head. Suitable for marking, but should not be used as a center punch.

| EU Prod. No | US Prod. No | Description | Case Qty/MOQ |
|-------------|-------------|---------------|--------------|
| J1906 | 14798 | Centering pin | 1 |



WRAP-A-ROUND

Inexpensive tools for marking straight lines around pipe; made from flexible gasket material, providing resistance to both heat and cold. All Wrap-A-Rounds are available in two colours. These designate material type and service temperature. GG (grey) material is used for high temperature applications (up to 550° F) and B (black) material is used for temperatures up to 350° F. Both material types are asbestos free.

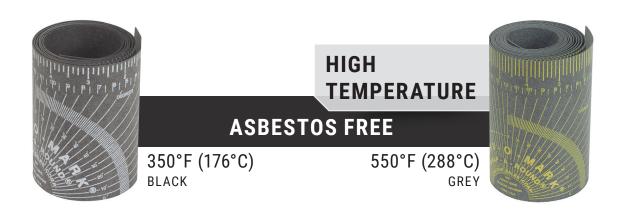

| EU Prod. No | US Prod. No | Description | Color | Temperature | Size | Pipe Diameter | Case Qty/ MOQ |
|----------------|----------------|--------------------------------|-------|---------------|--------------------------------|----------------------------------|------------------|
| J1858 | 14752 | Wrap-a-round 164B EX medium | Black | 350°F (176°C) | 3.88" (9.8 cm) x 4' (1.2 m) | 3" (7.6 cm) to 6" (15.2 cm) | 1 |
| J1859 | 14753 | Wrap-a-round 176B large | Black | 350°F (176°C) | 3.88" (9.8 cm) x 6' (1.8 m) | 3" (7.6 cm) to 10" (25.4 cm) | 1 |
| J1860 | 14754 | Wrap-a-round 177B EX large 7' | Black | 350°F (176°C) | 5" (12.7 cm) x 7' (2.1 m) | 4" (10.2 cm) to 12" (30.5 cm) | 1 |
| J1861 | 14756 | Wrap-a-round 179B EX large 9' | Black | 350°F (176°C) | 5" (12.7 cm) x 9' (2.7) | 6" (15.2 cm) to 16" (40.6 cm) | 1 |
| J1867 | 14763 | Wrap-a-round 164GG medium | Grey | 550°F (288°C) | 3.88" (9.8 cm) x 4' (1.2 m) | 3" (7.6 cm) to 6" (15.2 cm) | 1 |
| J1868 | 14764 | Wrap-a-round 176GG large | Grey | 550°F (288°C) | 3.88" (9.8 cm) x 6' (1.8 m) | 3" (7.6 cm) to 10" (25.4 cm) | 1 |
| J1869 | 14766 | Wrap-a-round 177GG EX large 7' | Grey | 550°F (288°C) | 5" (12.7 cm) x 7' (2.1 m) | 4" (10.2 cm) to 12" (30.5 cm) | 1 |
| J1870 | 14767 | Wrap-a-round 179GG EX large 9' | Grey | 550°F (288°C) | 5" (12.7 cm) x 9' (2.7) | 6" (15.2 cm) to 16" (40.6 cm) | 1 |

HEALTH SAFETY PRODUCTIVITY

85



Why Oberon?

The original innovator of Arc Flash products, Oberon is dedicated to engineering, testing standards, and being American made. We can't stop and won't stop providing for our customer's safety.

our research, product development, laboratory testing and

Innovation

With Oberon's "nearly clear" shield technology, you can now see all the colors of the wires you are working on.

Made in USA

We aren't just made in the U.S., we are 100% manufactured in house. As engineers, we develop innovative electrical safety solutions.

THE POWER OF CLARITY **True Color Grey (TCG)**

What is TCG?

Struggling to safely see the wire colors while still protecting yourself from an arc?

Our True Color Grey (TCG) product line combats that problem. It's finally solved the biggest problem electricians face when wearing appropriate arc flash protection, the issue of color distortion

through protective shields.

NEARLY CLEAR SHIELD

PATENTED TECHNOLOGY

ARC FLASH PROTECTION

CLEARLY DEFINE COLORS

ZERO COLOR DISTORTION





Oberon is not just a manufacturing company, we are an engineering company that develops innovative electrical safety solutions. At Oberon it is our mission to protect the welfare of the individual while adding value to a company's overall safety program.



Finding a better way





BEST



AR_{LIM} 17 cal/cm²







AR_{LIM} 25 cal/cm²













ARC FLASH FACE SHIELD

High Performance Arc Flash Protective Face Shield Kit

- Complies with GS-ET-29:2019-06 (Electric Arc, Box Test, Class 2 and Visible light transmittance (VLT), Class 2), EN 166:2001 (Optical class 1, Increased robustnes (S), Protection against high-speed particles (medium energy impact) (B), Resistance to surface damage by fine particles (K), Protection against short circuit electric arc (8)) and EN 170:2002 (Protection class 2C-2)
- Oberon's innovative **True Colour Grey (TCG™)** arc flash face shield features a patented nearly clear technology that allows a maximum color acuity while performing common electrical work tasks.
- Kit includes TCG™ G2 shield with side shield extenders. lower chin guard anti-scratch and anti-fog coating and attachment clips (available for different caps).
- Material: Polycarbonate
- Color: Clear Grey (TCG™)
- Thickness: 2,6 mm
- Weight: 425 g
- Arc Rating (AR_{LIM}):
 - 17 cal/cm²
 - 25 cal/cm²
- Made in the USA





| Product No | Description | AR _{LIM} | Case Qty/MOQ |
|------------------|--|-------------------|--------------|
| TCG-EU-G2-K | TCG Series Class 2 Arc Flash Face Shield Kit with Anti-Scratch and Antifog Coating | 17 cal/cm2 | 1 |
| TCG-EU-G2-KA4 | TCG Series Class 2 Arc Flash Face Shield Kit with A4 Adpater, Anti-Scratch, and Antifog Coating | 17 cal/cm2 | 1 |
| TCG-EU-G2-KA8 | TCG Series Class 2 Arc Flash Face Shield Kit with A8 Adpater, Anti-Scratch, and Antifog Coating | 17 cal/cm2 | 1 |
| TCG-EU-G2-KWBA | TCG Series Class 2 Arc Flash Face Shield Kit with WBA Adpater, Anti-Scratch, and Antifog Coating | 17 cal/cm2 | 1 |
| TCG-EU-G2-K25 | TCG Series Class 2 Arc Flash Face Shield Kit with Anti-Scratch and Antifog Coating | 25 cal/cm2 | 1 |
| TCG-EU-G2-K25A4 | TCG Series Class 2 Arc Flash Face Shield Kit with A4 Adpater, Anti-Scratch, and Antifog Coating | 25 cal/cm2 | 1 |
| TCG-EU-G2-K25A8 | TCG Series Class 2 Arc Flash Face Shield Kit with A8 Adpater, Anti-Scratch, and Antifog Coating | 25 cal/cm2 | 1 |
| TCG-EU-G2-K25WBA | TCG Series Class 2 Arc Flash Face Shield Kit with WBA Adpater, Anti-Scratch, and Antifog Coating | 25 cal/cm2 | 1 |





Oberon[™] Arc Flash Protection



Arc Flash Hood, Coat, and Bib Suit Kit

- Complies with GS-ET-29:2019-06 (Electric Arc, Box Test, Class 2 and Visible light transmittance (VLT), Class 2), EN 166:2001 (Optical class 2, Increased robustnes (S)) and EN 170:2002 Protection class 2C-2
- Complies with IEC 61482-2:2018 against the risk of burn provoked by electrical arch of 7kA (APC=2) according the standard EN 61482-1-2:2014
- Lightweight suit is made from a proprietary blend of arc rated, **inherently flame resistant, aramid fibers**.
- Nearly clear TCG Series hood window provides 100% true color acuity and includes anti-fog and anti-scratch resistant coatings. Hood comes equipped with an optional ventilation system and LED light for maximum comfort and vision while working.
- Arc flash face shield is made from a durable polycarbonate for long lasting protection from harsh environments.
- Knit cuff, dual-stage zipper front closure for easy on/off.
- Adjustable waist and suspenders for a customized fit.
- Reflective day/night striping on arms and legs for increased visibility.
- Color Black
- Made in the USA



75 CAL TCG™ ARC FLASH HOOD, COAT, AND BIB SUIT KIT (ATPV 76 cal/cm²)

| Product No | Size | Case Qty/MOQ |
|------------|------|--------------|
| TCG75B-S | S | 1 |
| TCG75B-M | М | 1 |
| TCG75B-L | L | 1 |
| TCG75B-XL | XL | 1 |
| TCG75B-2XL | 2XL | 1 |
| TCG75B-3XL | 3XL | 1 |
| TCG75B-4XL | 4XL | 1 |
| TCG75B-5XL | 5XL | 1 |
| | | |

100 CAL TCG™ ARC FLASH HOOD, COAT, AND BIB SUIT KIT (ATPV 100 cal/cm²)


| Product No | Size | Case Qty/MOQ |
|------------|------|--------------|
| TCG6B-S | S | 1 |
| TCG6B-M | М | 1 |
| TCG6B-L | L | 1 |
| TCG6B-XL | XL | 1 |
| TCG6B-2XL | 2XL | 1 |
| TCG6B-3XL | 3XL | 1 |
| TCG6B-4XL | 4XL | 1 |
| TCG6B-5XL | 5XL | 1 |

SPARE PARTS & ACCESSORIES

| Product No | Description | Case Qty/MOQ |
|------------|---|--------------|
| HVS-4B-PM | Fresh Air Arc Flash Hood Ventilation System | 1 |
| LED_LAMP | Hood Mounted L.E.D. Light | 1 |



HEALTH SAFETY PRODUCTIVITY

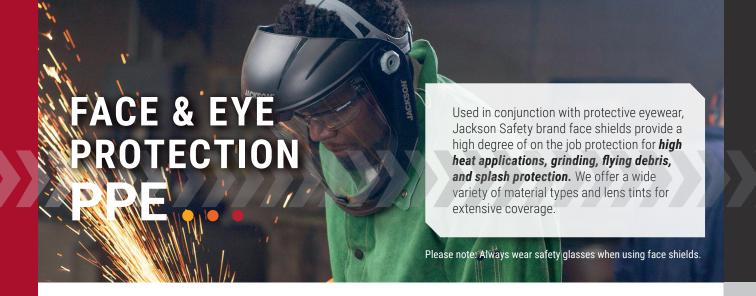

EYEWEAR IS MANDATORY

In many workplace environments, safety eyewear is mandatory due to the range of day-to-day tasks that can cause serious injuries to the eyes. Also safety eyewear is an important part of many employees' everyday workwear.

Safety glasses provide protection from dust, dirt, flying debris, and other projectiles created when work operations involve cutting, hammering, crushing, and other related operations.

Safety goggles besides providing protection from dust, dirt, flying debris, and other projectiles, also provide protection from splashes and burns.

FACE SHIELD - ANOTHER LAYER OF PROTECTION

Used in conjunction with protective eyewear, Jackson Safety® Face Shields provide a high degree of on-the-job protection for heat applications as well as grinding, flying debris, splash protection, and more.

MATERIAL TYPES

PET

A low-cost, recyclable option

Polycarbonate

- Impact performance
- Good performance against heat
- · Excellent cold flexibility

Selecting the right PPE to sufficiently reduce exposure to hazards is essential to work safety.

LENS TINTS

Clear

Allows for maximum visible-light transmission.

IRUV

Worn for applications and in environments where others are performing welding tasks such as torch brazing, torch soldering, gas welding, and oxygen cutting. Available in Shades 3.0 and 5.0.

SPECIAL TINTS

Enhances vision and reduces glare by blocking light transmission. Available in light, medium, and dark green tints.



Finding a better way



GOOD

BETTER

BEST

FACE SHIELDS





JACKSON® MAXVIEW


JACKSON® QUAD 500























SELLSTROM® ODYSSEY SERIES











JACKSON® SG





SELLSTROM® PREMIUM











GOGGLES




Jackson Safety® Face Shields

ANTHEM - 170SB

ANTHEM

Headgear and Window Kit



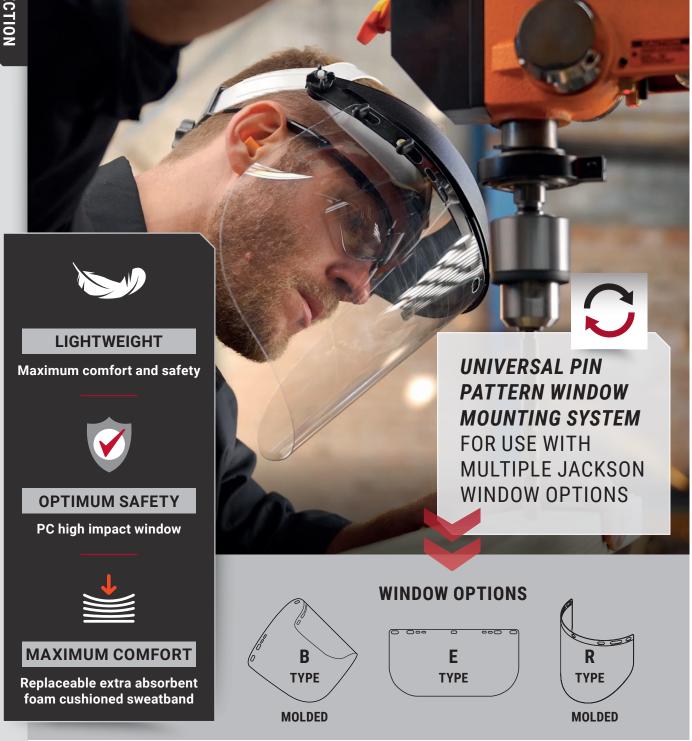

Jackson Safety introduces a new headgear and window combination that utilizes the 170-SB headgear with a PC high impact window. The headgear is built with a ratcheting adjuster that makes it easy to use and guarantees a secure fit. Includes a replaceable extra absorbent foam cushioned sweatband for increased operator comfort.

- Ratchet suspension allows easy adjustment and a comfortable fit
- Built-in sweatband keeps perspiration out of workers' eyes
- Lightweight for added comfort
- Heavy duty oversized spark-guard crown for added protection
- Wrap-around foam-cushioned sweat band gently hugs the natural shape of the head
- PC high impact window 203 x 394 x 1 mm
- Universal Pin Pattern window mounting system for use with multiple Jackson window options
- Made in USA



14953

WINDOW OPTIONS

R type, molded, V8B

B type, molded

E type, stamped



Please note: Always wear safety glasses when using face shields.



ANTHEM - 170SB

| Product No | Description | Case Qty/MOQ |
|------------|--|--------------|
| 14953 | 170-SB Headgear with 30706 clear PC window, uncoated | 20 |

SPARE PARTS & ACCESSORIES

| Product No | Description | Case Qty/MOQ |
|------------|--|--------------|
| 29057 | Face Shield PC window, R type, molded, clear, V8B | 12 |
| 29058 | Face Shield PC window, R type, molded, Shade 3, V8B | 12 |
| 29059 | Face Shield PC window, R type, molded, Shade 5, V8B | 12 |
| 29087 | Face Shield PC window, B type, molded, clear | 12 |
| 30706 | Face Shield PC window, E type, stamped, clear | 36 |



Jackson Safety® Face Shields

F4XP

Premium Face Shield Crown and Headgear



Jackson Safety® offers one of the most extensive universal mount face shield programs in the world! The F4XP premium face shield crown and headgear is designed for maximum comfort, productivity, and ease of use. It can be used with all universal style pin pattern windows.

- Oversized 370 Speed Dial™ ratcheting headgear quarantees a precise fit every time
- Patented "Qwik-Fit" swivel headband adjusts the suspension gear to the user's head for superior comfort
- Comes standard with a soft fabric sweatband for increased comfort and convenience
- Oversized crown built with premium high impact rated material for maximum protection
- (14262) F4XP Kit features premium 20 x 38.75 x 0.015 cm molded B type polycarbonate window (29087)
- Exclusive quick-change install and removal system ensures fast and efficient window changes
- **Speed Dial 370™** headgear offers the fastest, easiest, and most efficient ratcheting headgear system in the industry



Includes 29087 molded window

WINDOW OPTIONS

R type, molded, V8B

B type, molded

E type, stamped











Clear

Shade 3

Shade 5

Clear

Clea

Please note: Always wear safety glasses when using face shields.



F4XP

| Product No | Description | Case Qty/MOQ |
|------------|---|--------------|
| 14260 | F4XP Crown & 370 Speed Dial Headgear only | 1 |
| 14262 | F4XP Premium Face Shield (crown, headgear, 29087 window B type) | 6 |

SPARE PARTS & ACCESSORIES

| Product No | Description | Case Qty/MOQ |
|------------|--|--------------|
| 29057 | Face Shield PC window, R type, molded, clear, V8B | 12 |
| 29058 | Face Shield PC window, R type, molded, Shade 3, V8B | 12 |
| 29059 | Face Shield PC window, R type, molded, Shade 5, V8B | 12 |
| 29087 | Face Shield PC window, B type, molded, clear | 12 |
| 30706 | Face Shield PC window, E type, stamped, clear | 36 |
| 20695 | 370 Speed Dial™ Replacement Headgear | 1 |
| J5237 | 370 sweat band | 2 |
| 38424 | Hard Hat Interchange System - for F4XP and Maxview | 1 |



Jackson Safety® Face Shields

MAXVIEW™



Premium Face Shield



The MAXVIEW™ is a premium face shield that features an oversized window to deliver exceptional optical clarity and an industry-leading panoramic view. A built-in side and chin guard protects against splash and flying debris while the extended crown keeps you protected from overhead hazards.



High Impact

Polycarbonate Window

- The Maxview is designed to offer maximum face protection coverage, incorporating an extra-large clear polycarbonate window that is available in two options: without anti-fog treatment or with our premium anti-fog coating
- Extended top-of-head coverage protects against hazards from above
- Built-in side and chin guard protects against splash and flying debris
- Lightweight and balanced construction for all-day comfort
- Up and down detents lock securely in place until manually adjusted
- The high-impact PC window is then framed on the side and chin areas and features an extra-large crown
- This combination translates into maximum coverage, head to lower neck, and side to side. In fact, Maxview offers a full 1" of extra window protection on each side (2" total) versus the leading face shield model, ensuring best-in-class protection and exceptional panoramic views. Check and compare!
- Given its amazing coverage and viewing area, the Maxview is incredibly light
- Maxview incorporates engineered detents that lock in both the up and down positions
- Designed to be used with most goggles, respirators, and all safety glasses
- Premium 370 Speed Dial™ ratcheting headgear suspension - The 370 Speed Dial™ is highlighted by Jackson's famous "Easy Grab-Easy Turn" oversized adjusting dial and patented swivel adjuster band, achieving maximum comfort and fit quickly, easily, and conveniently—saves time, increases productivity, and improves worker safety!





14200

Please note: Always wear safety glasses when using face shields.



MAXVIEW

| Product No | Description | Case Qty/MOQ |
|------------|---|--------------|
| 14200 | Maxview Premium Faceshield | 4 |
| 14201 | Maxview Premium Faceshield anti-fog coating | 4 |

SPARE PARTS & ACCESSORIES

| Product No | Description | Case Qty/MOQ |
|------------|--|--------------|
| 14214 | Clear replacement window | 36 |
| 14215 | Clear replacement window anti-fog | 36 |
| 20695 | 370 Speed Dial™ Replacement Headgear | 1 |
| J5237 | 370 sweat band | 2 |
| 38424 | Hard Hat Interchange System - for F4XP and Maxview | 1 |



Jackson Safety® Face Shields

QUAD 500™

Premium Multi-Purpose Face Shield



and much more.



- All Quad 500 products have been designed to offer maximum above-the-neck face protection, including an extra-large molded polycarbonate window featuring our premium anti-fog coating
- For added protection, the molded window is completely framed on the sides and chin and features an extralarge crown
- The Quad 500 offers exceptional panoramic views with virtually no distortion
- Ideal for grinding, cutting, oxy/acetylene cutting, plasma cutting, brazing and more
- Engineered detents lock in the up or down position until manually adjusted
- Premium 370 Speed Dial™ ratcheting headgear suspension - The 370 Speed Dial™ is highlighted by Jackson's famous "Easy Grab-Easy Turn" oversized adjusting dial and patented swivel adjuster band, achieving maximum comfort and fit quickly, easily, and conveniently—saves time, increases productivity, and improves worker safety!



14220

Available with optional flip-up/flip-down extra-large IR window

- The Quad 500 face shield is also available with an exclusive, **extra-large flip-up/flip-down IR window** for added eye protection when used in applications producing infrared hazards
- It's easy and safe—by keeping the Quad 500 clear window in the down position at all times, the operator can flip the IR shaded window up or down, providing uninterrupted face protection during cutting and grinding operations
- Flip windows available in:
 - **Shade 5 IR** for oxy/acetylene cutting, brazing, and plasma cutting
 - **Shade 8 IR** for oxy/acetylene welding and plasma cutting
- Both the clear and flip windows feature detents that lock in both the up and down positions
- Designed to be used with most goggles, respirators, and all safety glasses

Please note: Always wear safety glasses when using face shields.



14230



QUAD 500

| Product No | Description | Case Qty/MOQ |
|------------|--|--------------|
| 14220 | Quad 500 Premium Multi-Purpose Face Shield | 4 |
| 14230 | Quad 500 Premium Multi-Purpose Face Shield Flip Visor Shade 5 IR | 4 |
| 14233 | Quad 500 Premium Multi-Purpose Face Shield Flip Visor Shade 8 IR | 4 |

SPARE PARTS & ACCESSORIES

| Product No | Description | | Case Qty/MOQ |
|------------|---|---|--------------|
| 14250 | 21.8 x 20.9 x 0.15 cm clear anti-fog window | | 12 |
| 14255 | 10.94 x 23.12 x 0.017 cm Shade 5 IR visor | | 12 |
| 14258 | 10.94 x 23.12 x 0.017 cm Shade 8 IR visor | | 12 |
| 20694 | 370 Speed Dial™ Replacement Headgear | | 1 |
| J5237 | 370 sweat band | | 2 |
| 38423 | Hard Hat Interchange System - for Quad 500 | 1 | |



Jackson Safety® Safety Goggles

GPL500

Premium Goggle / Face Shield



The GPL500 premium safety goggle with flip-up detachable face shield features an ultra-soft body design that easily conforms to your face to deliver a snug, yet comfortable seal. Indirect vents protect against chemical splash while anti-fog coating provides superior optical quality and keeps work uninterrupted.

- Flip-up/flip-down polycarbonate face shield delivers added protection from splash, dust, and flying debris
- Face shield is easily detachable
- Provides 99.9% UV protection
- Specially designed to fit over prescription eyewear
- Clear version is ideal for industrial, mining, construction, pressure washing, grinding and more
- Shade 3 and 5 IR are ideal for oxy/acetylene cutting, brazing, and plasma cutting operations



GPL500

| Product No | Description | Case Qty/MOQ |
|------------|---|--------------|
| 21000 | GPL500 Goggles, Blue, Clear, anti-fog | 6 |
| 21001 | GPL530 Goggles, Green, Shade 3 IR, anti-fog | 6 |
| 21002 | GPL550 Goggles, Green, Shade 5 IR, anti-fog | 6 |



Sellstrom® Safety Goggles

ODYSSEY II

Premium Safety Goggle





Dual lens models offer Anti-Fog treatment on inside lens - Anti-Scratch on outside lens



Soft goggle body conforms to your face for all day comfort



Specially designed to fit over prescription eyewear



Ventilation space minimizes fogging





OPTIMUM SAFETY

- Rated impact resistance
- **Rated resistance** to fogging of oculars (except S80231 & S80210)

- The Odyssey II premium goggle series has been a market leader for 15+ years
- Unique "Dual Sealed" UV absorbing polycarbonate lens technology (except single lens Clean Room and Shade 5 cutting models)
- Dual lens models offer Anti-Fog treatment on inside lens Anti-Scratch on outside lens
- Industrial, Chemical Splash and Shade 5 models feature top and bottom Indirect Vents providing superior ventilation and the safest operator conditions
- 100% fog free, even in the worst conditions
- Stylish soft goggle body conforms to your face, providing a comfortable yet snug seal and maximum protection against liquids and dust
- Exceptional panoramic views
- Specially designed to fit over prescription eyewear
- Simply the best goggle in the market



Odyssey II Series Industrial Dual Lens Model

- Our most popular Odyssey II model
- Ideal for a wide variety of applications including construction sites, shop use and general industrial work-place protection
- Complete with extra wide flame retardant cloth strap

| Product No | Body Color | Vent Type | Lens | Coatings | Tint | Case Qty/ MOQ |
|------------|------------|-----------|------|----------|-------|------------------|
| \$80200 | Blue | Indirect | Dual | HC/AF | Clear | 10 |



Odyssey II Series Chemical Splash Dual Lens Goggle

- Specifically designed for those applications where the risk of a chemical splash exists
- Complete with extra wide grey, latex free neoprene strap

| Product N | lo Body Color | Vent Type | Lens | Coatings | Tint | Case Qty/ MOQ |
|-----------|---------------|-----------|------|----------|-------|------------------|
| \$80201 | Blue | Indirect | Dual | HC/AF | Clear | 10 |



Odyssey II Series Clean Room Goggle

- Specifically designed for clean room applications
- Unlike traditional, single use clean room goggles, these premium goggles are re-usable and designed for multi-use clean room applications
- Can be autoclaved
- Top-Vented body with clear uncoated lens
- Complete with extra wide grey, latex free neoprene strap

| Product No | Body Color | Vent Type | Lens | Coatings | Tint | Case Qty/ MOQ |
|------------|------------|------------|--------|----------|-------|------------------|
| S80231 | Blue | Top-Vented | Single | Uncoated | Clear | 10 |



S80231

Odyssey II Series Shade 5 Cutting Goggle

- Features a durable Shade 5 IR (single) lens
- Specifically designed for grinding, chipping and brazing operations in fabrication and welding shop applications
- Complete with extra wide flame retardant strap

| Product No | Body Color | Vent Type | Lens | Coatings | Tint | Case Qty/ MOQ |
|------------|----------------------|-----------|--------|----------|------------|------------------|
| \$80210 | Black (high temp) | Indirect | Single | Uncoated | Shade 5 IR | 10 |



A SELLSTROM EXCLUSIVE!





Sellstrom® Safety Goggles

GM510

Premium Safety Goggle





SUPERIOR PROTECTION AGAINST DUST AND CHEMICAL SPLASHES



Outstanding panoramic views with virtually no distortion



Soft goggle body conforms to your face for all day comfort



Specially designed to fit over prescription eyewear



Extra wide flame retardant strap



Ventilation space minimizes fogging





ANTI-FOG/ ANTI-SCRATCH

- Rated resistance to surface damage by fine particles
- Rated resistance to fogging of oculars

- Stylish orange/black co-molded soft TPR body provides comfort and fit
- The GM510 goggle combines comfort, fit, safety and great looks in one product
- Molded curved polycarbonate lens provides outstanding panoramic views with virtually no distortion
- Top & bottom Indirect Vents along with Anti-Fog lens coating provides superior ventilation and a safe, fog-free working environment
- Indirect vents provide superior protection against dust and chemical splashes
- Swivel mounted extra wide flame retardant strap
- Specially designed to fit over some prescription eyewear
- Provides 99.9% UV protection

| Product No | Body Color | Vent Type | Lens | Coatings | Tint | Case Qty/MOQ |
|------------|-------------------|-----------|--------|----------|-------|--------------|
| S82510 | Black/Orange | Indirect | Single | Anti-fog | Clear | 10 |





SAFETY GLASSES - SHADE 3 & 5 IR

- Available in Shade 3 & Shade 5 IR for soldering, brazing and cutting operations
- All glasses are made with anti-scratch polycarbonate lenses
- Provide 99.9% UV protection
- CE certified

B5[™] Safety Glasses

- Features fold out contouring side shields for maximum eye protection
- Arms are extendable for maximum fit and comfort
- Dual polycarbonate lenses are available in Shade 5 IR

| Produ | ct No | Temple Color | Side Shield | Lens Tint | Lens Coating | Case Qty/ MOQ |
|-------|-------|--------------|-------------|------------|--------------|------------------|
| S74 | 751 | Black | Black | Shade 5 IR | Hard Coated | 12/Box |

Optimum Protection

Specifically for use in welding and fabrications shops







X35[™] Safety Glasses

- Temple arms molded with side shields for maximum eye protection
- Features unique spring loaded flip window
- It's easy and safe by keeping the glasses on at all times, the operator can flip
 the shaded lenses up or down, providing uninterrupted eye protection during
 cutting and grinding operations
- Clear lens provides eye protection when the flip plate is in the up position
- Flip windows available in two Shades: 3 IR and 5 IR

| Product No | Temple Color | Fixed Lens | Flip Lens Tint | Lens Coating | Case Qty/ MOQ |
|------------|--------------|------------|----------------|--------------|------------------|
| \$72903 | Black | Clear | Shade 3 IR | Hard Coated | 12/Box |
| \$72905 | Black | Clear | Shade 5 IR | Hard Coated | 12/Box |



CE CA

SAFETY GLASSES - ADVANTAGE SERIES

Sebring[™] Safety Glasses

- Classic one-piece molded lens offers excellent front/side protection
- Lightweight, comfortable and very affordable
- Arms are extendable for maximum fit and comfort
- All glasses are made using virgin, unitary polycarbonate lenses
- Provide 99.9% UV protection

\bigcirc

Rated resistance to fogging of oculars

| Product No | Temple Color | Lens Tint | Lens Coating | Case Qty/MOQ |
|------------|--------------|-----------|--------------|--------------|
| \$76301 | Black | Clear | Hard Coated | 12/Box |

Affordable

Ideal for construction, shop and general eye protection applications









Jackson Safety® Safety Glasses

JACKSON SG

Premium Protective Eyewear





READY-TO-USE

All standard packs of 12 come with an attractive ready-to-use retail dispenser box



WRAPAROUND STYLE LENSES

Extend protection to the periphery

106



Variety of styles available for maximum safety and productivity



Soft nose piece offers superior comfort



Provides 99.9% U.V. protection



All models come complete with a convenient neck cord to prevent loss



The Jackson® SG series is the only genuine safety eyewear product available under the Jackson Safety® brand. Designed with the wearer in mind, this premium product offers outstanding comfort, fit, style, and durability. Available in a variety of frames and lenses, the Jackson® SG family of products is the clear choice in eye protection.

Ordering E-mail sales@jacksonsafety.eu
Customer Service +386 1 477 67 84

- Specially designed to offer maximum eye coverage and protection, incorporating a variety of lens shades and coatings
- Made with premium virgin polycarbonate high impact, optically correct wrap style lenses, providing 99.9% UV protection
- Soft temples are curved inwards from front to back to ensure a super comfortable, slip-resistant fit
- As an added advantage, the temple tips are extremely flexible, further ensuring a snug fit while relieving any undue pressure to the user—these glasses are extremely comfortable and stay on during use!
- Frames have been developed using a specially formulated ultra-flexible, ultrastrong base material that provides incredible durability, significantly reducing breakage—check and compare!

| Product No | Frame Color | Lens Design | Lens Description | Lens Coating | Work Environment | Case Qty/ MOQ |
|---------------|----------------|-----------------|---|-----------------|---------------------|------------------|
| 50000 | Black | Clear | Maximum visible light | Anti-scratch | Indoor/General | 12/Box |
| 50001 | Black | Clear | Maximum visible light | Anti-fog | Indoor | 12/Box |
| 50002 | Black | Amber | Ideal for low lit working environments | Anti-scratch | Low Light | 12/Box |
| 50003 | Black | Amber | Ideal for low lit working environments | Anti-fog | Low Light | 12/Box |
| 50004 | Black | 1/0 | Reduces glare without distorting original color | Anti-scratch | Indoor/Outdoor | 12/Box |
| 50005 | Black | Blue Shield | Ideal for bright outdoor conditions | Anti-scratch | Outdoor | 12/Box |
| 50006 | Black | Smoke Mirror | Smoke tinted with outer mirror finish coating | Anti-scratch | Outdoor | 12/Box |
| 50007 | Black | Smoke Mirror | Smoke tinted with outer mirror finish coating | Anti-fog | Outdoor | 12/Box |
| 50009 | Black | Blue Mirror | Smoke tinted with outer blue mirror finish | Anti-scratch | Outdoor | 12/Box |



50000/50001



50002/50003



50004



50005



50006/50007



50009



50008



50010



50040/50041/50042

JACKSON'SG IR

INFRARED PROTECTION

| Product No | Frame Color | Lens Design | Lens Description | Work Environment | Case Qty/ MOQ |
|---------------|----------------|-------------|--|----------------------------|------------------|
| 50008 | Black | IR 3.0 | Protects against infrared and UV radiation | Light cutting/ brazing | 12/Box |
| 50010 | Black | IR 5.0 | Protects against infrared and UV radiation | Medium cutting/ brazing | 12/Box |

JACKSON'SG

READERS

| Product No | Frame Color | Lens Design | Reader Strength | Lens Description | Work Environment | Case Qty |
|---------------|----------------|----------------|--------------------|-----------------------|---------------------|-------------|
| 50040 | Black | Clear | 1.5 | Maximum visible light | Indoor/General | 12/Box |
| 50041 | Black | Clear | 2 | Maximum visible light | Indoor/General | 12/Box |
| 50042 | Black | Clear | 2.5 | Maximum visible light | Indoor/General | 12/Box |

SPARE PARTS & ACCESSORIES

| Product No | Description | Case Qty/MOQ |
|------------|--|--------------|
| 50099 | JACKSON Microfiber bag for Safety Glasses 120x200 mm | 50 |





Sellstrom® Safety Glasses

XP410, XP450, XP460

Safety Glasses - Premium Series

CLEAR VISION WITH PREMIUM VIRGIN POLYCARBONATE HIGH IMPACT LENSES



Sleek, modern co-molded temples offer outstanding style and comfort



Soft nose piece for added comfort



Two piece polycarbonate lens



Ventilation space minimizes fogging





EXCLUSIVE Sta-Clear™

ANTI-FOG/ ANTI-SCRATCH

Washable lens treatment

- Rated resistance to surface damage by fine particles
- N Rated resistance to fogging of oculars
- Sellstrom offers a wide range of super premium, high quality safety glasses
- Rich in style, comfort, fit and safety
- Each model has been designed to exceed the needs of the most demanding user
- Made with premium virgin polycarbonate high impact lenses
- Lenses are specially coated with Sellstrom's premium Sta-Clear™ Anti-Fog/Anti-Scratch washable lens treatment for maximum performance, durability and life
- Virtually 100% fog free for optimum operator safety
- Provide 99.9% UV protection



XP410 Safety Glasses

- The XP410 offers feather light frames, great style, maximum comfort & fit
- So light, you won't even remember you have them on!
- High impact optically correct wrap style unitary PC lens offers superior coverage
- Stylish, ultra-thin black/green co-molded temples
- Temples are curved inwards to ensure comfortable, slip-resistant fit
- Temple tips are curved outwards for gentle placement and removal
- Soft, co-molded above-the-eye band provides superior eye coverage
- Soft, co-molded nose piece with flexible fingers ensures maximum comfort

| Product No | Temple Color | Lens Tint | Lens Coating | Case Qty/MOQ |
|------------|--------------|-----------|------------------|--------------|
| \$72000 | Black/Green | Clear | Sta-Clear™ HC/AF | 12/Box |
| S72001 | Black/Green | Smoke | Sta-Clear™ HC/AF | 12/Box |



S72000



S72001

XP450 Safety Glasses

- The XP450 is our sportiest looking safety glass
- Edgy, sleek and modern co-molded temples offer outstanding style and comfort
- High impact optically correct wrap style two-piece PC lenses offer superior coverage
- Lenses are mounted to the frame with a ventilation space, minimizing fogging
- Temples are curved inwards to ensure comfortable, slip-resistant fit
- Temple tips are curved outwards for gentle placement and removal
- Soft nose piece offers all day comfort

| Product No | Temple Color | Lens Tint | Lens Coating | Case Qty/MOQ |
|------------|--------------|-----------|------------------|--------------|
| \$72300 | Black/Red | Clear | Sta-Clear™ HC/AF | 12/Box |
| \$72301 | Black/Red | Smoke | Sta-Clear™ HC/AF | 12/Box |



\$72300



S72301

XP460 Safety Glasses

- The XP460 offers a sporty, stylish heavy duty frame and temple design
- Our only full frame premium safety glass
- High impact optically correct two-piece PC lenses offer superior coverage
- Stylish black/green co-molded temples & soft nose piece offers all day comfort
- Temples are curved inwards to ensure comfortable, slip-resistant fit
- Temple tips are curved outwards for gentle placement and removal

| Product No | Temple Color | Lens Tint | Lens Coating | Case Qty/MOQ |
|------------|--------------|-----------|------------------|--------------|
| \$72400 | Black/Green | Clear | Sta-Clear™ HC/AF | 12/Box |
| \$72401 | Black/Green | Smoke | Sta-Clear™ HC/AF | 12/Box |



S72400



CE CE



DISPOSABLE APPAREL

Protects workers from dust, dirt and grime, oil and grease. Disposable apparel items are suitable for many industries:

LAB AND PHARMACEUTICAL APPLICATIONS

MANUFACTURING

FOOD PROCESSING AND RESTAURANTS

HI-VIS SAFETY WEAR

High visibility / hi-vis safety wear will improve your visibility on a jobsite and ultimately, will improve your workplace safety:

CONSTRUCTION SITES
TRANSPORTATION INDUSTRY
ELECTRICAL UTILITY INDUSTRY
MANUFACTURING
WAREHOUSES

It seems safety workwear is essential almost everywhere. The importance of safety clothing cannot be stressed enough. Focus on choosing the right PPE and ensure your workforce stays protected and free from injury.



Disposables

Workers should have personal disposable apparel to protect their entire bodies from head to toe.

Hi-Vis


Features of high-visibility clothing have improved the effectiveness and contributed to improved safety for workers.



Finding a better way



JACKSON® SAFETY

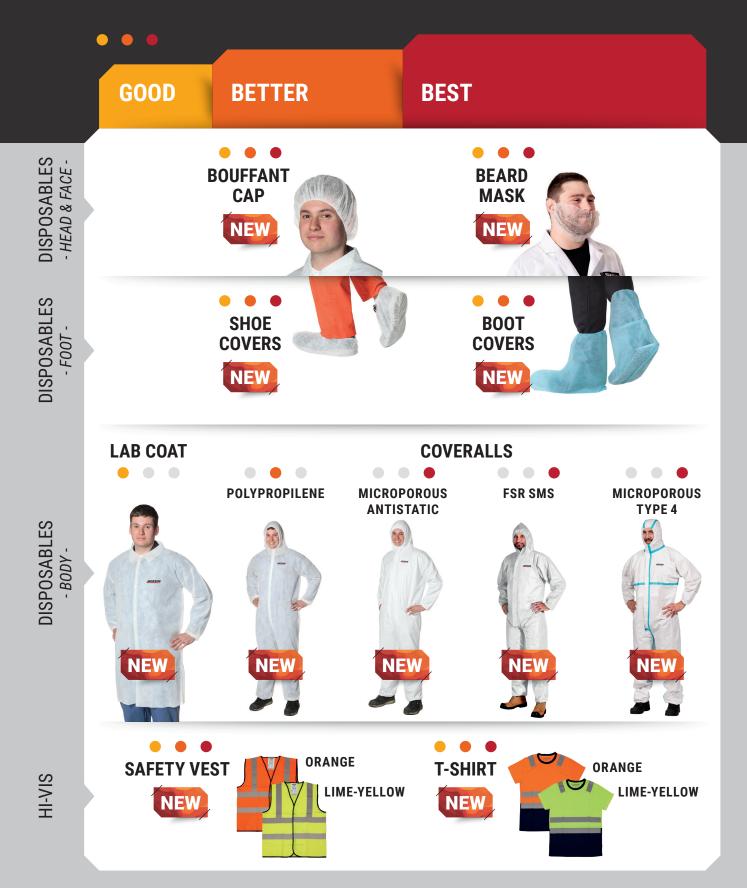







POLYPROPYLENE BOUFFANT CAP

- Basis weight 12 GSM tested ASTM D3776
- Highly breathable, cool and comfortable
- For non-hazardous environment applications
- Size: 21" (53 cm)
- Colour: White



Optimum Protection For non-hazardous

environment applications

| Product No | Description | Case Qty/MOQ |
|------------|---|--------------|
| 202100 | Disposable Polypropylene Bouffant Cap - White | 100 |



DISPOSABLE BEARD MASK

- Lightweight breathable
- PP material 14g
- Elastic opening and strap to the back
- One size fits most



Great for food processing, lab or pharmaceutical applications

| Product No | Description | Case Qty/MOQ |
|------------|-----------------------------|--------------|
| 202400 | Disposable beard mask - O/S | 100 |





LIGHTWEIGHT



HIGHLY BREATHABLE



HIGH COMFORT

Brand / Marke



POLYPROPYLENE SHOE COVER

- Basis weight 30 GSM tested ASTM D3776
- Lightweight, economy and disposable
- Elastic ankles
- Size: 17.3" x 7.1" (44 x 18 cm)
- Colour: White





| Product No | Description | Case Qty/MOQ |
|------------|--------------------------------------|--------------|
| 202200 | Disposable Polypropylene Shoe Covers | 50 Pairs |

POLYPROPYLENE BOOT COVER

- Basis weight 30 GSM tested ASTM D3776
- Lightweight, economy and disposable
- Elastic ankles
- Serged seams
- Anti-skid design
- Colour: Blue



Optimum Protection

For non-hazardous environment applications

| Product No | Description | Case Qty/MOQ |
|------------|--------------------------------------|--------------|
| 202300 | Disposable Polypropylene Boot Covers | 25 Pairs |





ONE SIZE FITS MOST



ECONOMY



DISPOSABLE



POLYPROPYLENE COVERALL



- Zipper front
- Improved hood and neck design reduces leakage points
- Designed with elastic waist, ankles and wrists for optimum fit and freedom of movement
- Serged seams
- Highly breathable, cool and comfortable
- Protection from dust, dirt and grime
- For non-hazardous environment applications
- Individually packed
- Colour: White

Sizes: S-5XL



Protection from dust, dirt and grime

| Product No | Description | Case Qty/ MOQ |
|------------|--|------------------|
| 203502 | Disposable Polypropylene Coveralls - S | 50 |
| 203503 | Disposable Polypropylene Coveralls - M | 50 |
| 203504 | Disposable Polypropylene Coveralls - L | 50 |
| 203505 | Disposable Polypropylene Coveralls - XL | 50 |
| 203506 | Disposable Polypropylene Coveralls - 2XL | 50 |
| 203507 | Disposable Polypropylene Coveralls - 3XL | 50 |
| 203508 | Disposable Polypropylene Coveralls - 4XL | 50 |
| 203509 | Disposable Polypropylene Coveralls - 5XL | 50 |
| | | |









HIGHLY BREATHABLE



HIGH COMFORT

A / Eine / Une Marque / Una Marca / Un Marchio





ANTISTATIC MICROPOROUS COVERALL

- 55 GSM Antistatic microporous film laminate
 - Complies with Chemical Protective Coveralls Category III EN ISO 13982-1 Type 5 – Protection Against Hazardous Dry Particles
 - Complies with Chemical Protective Coveralls Category III EN ISO 13034 Type 6 – Protection Against Light Splashes and Light Sprays of Liquid Chemicals
 - Breathable, comfortable and lint free
 - Zipper front

- Improved hood and neck design reduces leakage points
- Designed with elastic waist, ankles and wrists for optimum fit and freedom of movement
- Serged seams
- For non-hazardous environment applications
- Individually packed
- Colour: White

| Product No | Description | Case Qty/MOQ |
|---------------|---|-----------------|
| 206502 | Disposable Antistatic Microporous Coveralls - S | 50 |
| 206503 | Disposable Antistatic Microporous Coveralls - M | 50 |
| 206504 | Disposable Antistatic Microporous Coveralls - L | 50 |
| 206505 | Disposable Antistatic Microporous Coveralls - XL | 50 |
| 206506 | Disposable Antistatic Microporous Coveralls - 2XL | 50 |
| 206507 | Disposable Antistatic Microporous Coveralls - 3XL | 50 |
| 206508 | Disposable Antistatic Microporous Coveralls - 4XL | 50 |
| 206509 | Disposable Antistatic Microporous Coveralls - 5XL | 50 |







EN 13982-1:2004+A1:2010
Type 5B - Protection against airborne solid particulates
EN 13034:2005+A1:2009
Type 6B - Protection against

Type 6B - Protection against liquid chemical, light spray



EN 1149-5:2018 Antistatic



EN 14126:2003+AC:2004 Infective agents (Type 5B, 6B)



EN ISO 13688:2013+A1:2021 Protective clothing general requirements



FSR SMS COVERALL

- 50 GSM 100% FSR treated SMS (Spunbound Melt-Blown) non-woven material
- Complies with Chemical Protective Coveralls Category III **EN ISO 13982-1 Type 5** Protection Against Hazardous Dry Particles
- Complies with Chemical Protective Coveralls Category III EN ISO 13034 Type 6 – Protection Against Light Splashes and Light Sprays of Liquid Chemicals
- Flame spread resistant tested to EN 14116 Index 1
- For FSR applications only: must be worn over other CGSB approved flame resistant apparel

| • Can be used in bacterial culture labs as well as in |
|---|
| the pharmaceutical, wood/metal processing and |
| construction industries |

- 2-way zipper front with re-sealable storm flap
- I ow lint
- Elastic cuff, ankle and face line
- Elastic waist at back
- Individually packed
- Colour: White

| Product No | Description | Case Qty/MOQ |
|------------|------------------------------------|--------------|
| 207502 | FSR Disposable SMS Coveralls - S | 50 |
| 207503 | FSR Disposable SMS Coveralls - M | 50 |
| 207504 | FSR Disposable SMS Coveralls - L | 50 |
| 207505 | FSR Disposable SMS Coveralls - XL | 50 |
| 207506 | FSR Disposable SMS Coveralls - 2XL | 50 |
| 207507 | FSR Disposable SMS Coveralls - 3XL | 50 |
| 207508 | FSR Disposable SMS Coveralls - 4XL | 50 |
| 207509 | FSR Disposable SMS Coveralls - 5XL | 50 |





OPTIMUM PROTECTION

Asbestos fibres, such as chrysotile, are typically 3-5 microns in size. The SMS fabric used in the construction of our SMS coverall has been proven to filter 100% of particles larger than 3 microns.



EN 13982-1:2004+A1:2010

Type 5 - Protection against airborne

solid particulates

EN 13034:2005+A1:2009

Type 6 - Protection against liquid chemical, light spray



EN 1149-5:2018 Antistatic




EN 1073-2:2002 Protection against radioactive contamination (no rays)



EN 14116:2015 Flame Spread Resistant



EN ISO 13688:2013+A1:2021 Protective clothing general requirements







MICROPOROUS COVERALL - TYPE 4


- 65 GSM microporous film laminated non-woven material
- Complies with Chemical Protective Coveralls Category III EN ISO 14605 Type 4 – Protection Against Spray and Infectious Agents
- Complies with Chemical Protective Coveralls Category III EN ISO 13982-1 Type 5 - Protection Against Hazardous Dry Particles
- Complies with Chemical Protective Coveralls Category III EN ISO 13034 Type 6 – Protection Against Light Splashes and Light Sprays of Liquid Chemicals


| • | Premium | sewn and | taped | seams | for | increased | hol | dou | ď. |
|---|------------|------------|---------|-------|-----|-----------|-----|-----|----|
| | of liquids | and dry pa | article | S | | | | | |

- 2-way zipper front with sealable storm flap
- I ow lin
- · Elastic cuff, ankle and face line
- Elastic waist at back
- Individually packed
- Colour: White



Ideal for protection from airborne particulates, biohazard, chemicals, contamination and splashes







SEWN & TAPED SEAMS

Both sewn and taped to offer a robust chemical resistance against substantial liquid splashes and excessive seam stress. The sewn seam is covered with a strip of compatible tape by heat sealing.



EN 14605:2005+A1:2009

Type 4 - Protection against liquid chemicals

EN 13982-1:2004+A1:2010

Type 5 - Protection against airborne solid particulates

EN 13034:2005+A1:2009

Type 6 - Protection against liquid chemical, light spray



EN 1149-5:2018 **Antistatic**



EN 1073-2:2002 Protection against radioactive contamination (no rays)



EN 14126:2003+AC:2004 Infective agents (Type 4B, 5B, 6B)



EN ISO 13688:2013+A1:2021 Protective clothing general requirements





Sizes:

S-5XL



POLYPROPYLENE LAB COAT

- Basis weight 30 GSM tested ASTM D3776
- 4-button front
- Elastic wrists
- Serged seams
- Highly breathable, cool and comfortable
- 10/pkg
- Colour: White

Sizes: XS-4XL



Optimum Protection

For non-hazardous environment applications

| | <u> </u> | |
|---------------|---|------------------|
| Product No | Description | Case Qty/ MOQ |
| 203601 | Disposable Polypropylene Lab Coat - XS | 100 |
| 203602 | Disposable Polypropylene Lab Coat - S | 100 |
| 203603 | Disposable Polypropylene Lab Coat - M | 100 |
| 203604 | Disposable Polypropylene Lab Coat - L | 100 |
| 203605 | Disposable Polypropylene Lab Coat - XL | 100 |
| 203606 | Disposable Polypropylene Lab Coat - 2XL | 100 |
| 203607 | Disposable Polypropylene Lab Coat - 3XL | 100 |
| 203608 | Disposable Polypropylene Lab Coat - 4XL | 100 |









HIGHLY BREATHABLE



HIGH COMFORT



Brand / Marke



Jackson Safety® Hi-Vis Safety Wear



HI-VIS TRICOT SAFETY VEST

With 5cm Tape

- EN ISO 20471:2013+A1:2016 Class 2
- StarTech® reflective tape
- 100% Polyester, 120 gsm





| | 0 | R | Α | N | G | Е |
|--|---|---|---|---|---|---|
|--|---|---|---|---|---|---|

| Product No | Size | Case Qty/ MOQ |
|---------------|------|------------------|
| 102103 | М | 50 |
| 102104 | L | 50 |
| 102105 | XL | 50 |
| 102106 | 2XL | 50 |
| 102107 | 3XL | 50 |
| 102108 | 4XL | 50 |
| | | |

Sizes: M-4XL

YELLOW/LIME

| Product No | Size | Case Qty/ MOQ |
|---------------|------|------------------|
| 102203 | М | 50 |
| 102204 | L | 50 |
| 102205 | XL | 50 |
| 102206 | 2XL | 50 |
| 102207 | 3XL | 50 |
| 102208 | 4XL | 50 |
| | | |



HI-VIS BIRDSEYE SAFETY T-SHIRT

100% Polyester Birdseye

- Soft premium birdseye moisture-wicking polyester, 160gsm
- EN ISO 20471:2013+A1:2016 Class 1
- StarTech® reflective tape
- Rib crew neck



ORANGE

| Size | Case Qty/ MOQ |
|------|-------------------------|
| XS | 50 |
| S | 50 |
| М | 50 |
| L | 50 |
| XL | 50 |
| 2XL | 50 |
| 3XL | 50 |
| 4XL | 50 |
| 5XL | 50 |
| | XS S M L XL 2XL 3XL 4XL |

Sizes: XS-5XL

YELLOW/LIME

| T E E E O W/ E I WI E | | | | |
|-----------------------|------|------------------|--|--|
| Product No | Size | Case Qty/ MOQ | | |
| 105201 | XS | 50 | | |
| 105202 | S | 50 | | |
| 105203 | М | 50 | | |
| 105204 | L | 50 | | |
| 105205 | XL | 50 | | |
| 105206 | 2XL | 50 | | |
| 105207 | 3XL | 50 | | |
| 105208 | 4XL | 50 | | |
| 105209 | 5XL | 50 | | |

CE



VISIBILITY



HIGHLY BREATHABLE



HIGH COMFORT



BE AWARE OF YOUR SURROUNDINGS

Making the workplace safe is everyone's responsibility, so make sure that you check your work area and remove all potential hazards before starting.

This small step can ensure you have a productive day at work and arrive home in the same condition that you went to work.

PPE IS THERE TO SAVE YOUR LIFE – USE IT.

It is essential that you wear the correct PPE for the job application. The fit, comfort, colour and certification of the product needs to be right to enable you to deliver your best work. Check them all before you start.

Our livelihoods depend on us doing our best work. The best work is only achieved when your health and safety is guaranteed.

Your first line of defense:

HEADLAMPS

HEARING PROTECTION

KNEE & ELBOW PROTECTION

SLIP PROTECTION

Work is something we all do. The quality of work with safety and health is a basic part of a safety culture. Building a culture that lasts 365 days a year is our goal.



Rechargeable SMD/COB 250 Lumens Headlamp or COB 150 Lumens Headlamp provide lighting in the darkest work environments.

Earplugs



Choose from a wide variety of hearing conservation solutions in both disposable and reusable ear plugs.

Knee & Elbow Pads



Excellent for welders, ship builders, roofers, construction workers, flooring installers and anywhere hard working Knee & Elbow Pads are required.

Traction Aids



The solution that gives you the utmost confidence on ice and snow. Ice Diamond™ Tungsten Carbide Spikes provide powerful traction with maximum grip.



Finding a better way



Ordering E-mail sales@jacksonsafety.eu

Customer Service +386 1 477 67 84 www.jacksonsafety.eu

GOOD


BETTER

BEST

HEADLAMPS

HEARING PROTECTION









HEADLAMP 250 Lumens







H20 EARPLUGS REUSABLE







KNEE PADS STANDARD



KNEE PADS GEL



TRACTION AIDS

K1 MID-SOLE



DUE NORTH GRIP PRO



DUE NORTH AIDS



DUE NORTH HEEL TRACTION LIGHT INDUSTRIAL



DUE NORTH ALL PURPOSE INDUSTRIAL









Jackson Safety® Headlamps

RECHARGEABLE SMD/COB HEADLAMP **250 LUMENS**

- Combination SMD and COB technology for long distance or wide angle lighting
- Lithium-Ion battery is USB chargeable using any compatible charging block
- Cree XPG SMD provides the ultimate in long distance lighting
- Both light sources feature Low, High, Strobe, and Variable functions
- Hold down either power button to precisely adjust light level to suit your task
- Can be tilted to aim light at the work
- IP54 rated for outdoor use
- Anti-slip strap and hooks keep light from slipping up when worn with a hard hat





Lithium-Ion battery is USB chargeable using any compatible charging block





OPTIMUM PROTECTION

Rechargeable SMD/COB 250 Lumens Headlamp provide lighting in the darkest work environments.

TECHNICAL DATA

| Batteries | Li-ion |
|---------------|---------|
| Beam Distance | 117 |
| Charger | USB |
| Charging Time | 2.5 hrs |

| Lumens at High Power | 250 |
|------------------------|--------|
| Lumens at Low Power | 85 |
| Run Time at High Power | 3 hrs |
| Run Time at Low Power | 10 hrs |

| Product No | Description | Case Qty/MOQ |
|------------|--|--------------|
| 16250 | Rechargeable smd/cob Headlamp 250 Lumens | 6 |



Jackson Safety® Headlamps

COB HEADLAMP 150 LUMENS

- COB technology for wide angle and close up work
- High, Low, and Strobe functions
- IP54 rated for outdoor use
- Can be tilted to aim light at the work
- Anti-slip strap and hooks keep light from slipping up when worn with a hard hat
- Includes batteries
- Sold in 2x6 pc POP display only







Sold in 2x6 pc POP display only





OPTIMUM PROTECTION

COB 150 Lumens Headlamp provide lighting in the darkest work environments.

TECHNICAL DATA

| Batteries | 3 x AAA |
|----------------------|---------|
| Beam Distance | 5 |
| Lumens at High Power | 150 |

| Lumens at Low Power | 40 |
|------------------------|--------|
| Run Time at High Power | 4 hrs |
| Run Time at Low Power | 16 hrs |

| Product No | Description | Case Qty/MOQ |
|------------|-------------------------|--------------|
| 16150 | Cob Headlamp 150 Lumens | 12 |



PROVIDE SAFE WORKING CONDITIONS



Why is Hearing Protection important?

Continued exposure to noise above certain levels causes permanent hearing damage. Hearing cells cannot be repaired nor do they regenerate.

When does it become a problem?

Workers are exposed to noise levels at different frequencies that may vary depending on the type of industry and activities performed. Noise levels above 80dB will start causing progressive hearing damage as the noise intensity and exposure increase.


Getting to Know Hearing

Hearing protection should be taken very seriously and protectors, should be comfortable to wear and offer sufficient attenuation to prevent hearing loss based on individual protection needed.



What Level of Protection Do You Need?

The SNR number gives consumers a methodology to judge performance among different models of hearing protectors. A higher number indicates more effective protection against sound.

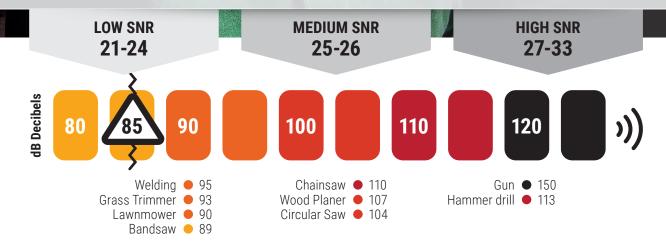

Employer's responsibilities

Under EU noise legislation, employers must provide the option of suitable hearing protection where noise exceeds 80dB(A). At 85dB, employers must provide and strictly enforce the use of Hearing Protection.

European standards require that hearing protection equipment is tested to determine the Single Number Ratings (SNR) of each product. This is calculated when environmental noise level and the desired final noise levels, at the end organ of hearing, are subtracted.

Jackson Safety® Hearing Protection provides quality, comfort and ease-of-use in reusable and disposable styles for excellent attenuation in a wide variety of noise-level environments. For hearing protection solutions, choose from a wide variety of earplugs designed





Jackson Safety® Earplugs



H10 HEARING PROTECTION

Disposable Earplugs

- Soft roll-down foam for easy insertion
- High visibility for easy compliance monitoring
- Each pair individually bagged
- Corded options available
- Also available in corded metal detectable option
- Longer and softer for helping correct insertion
- Ideal releasing time
- Ideal for high noise environments





Ideal for high noise

environments

67212

13821

H10 HEARING PROTECTION

| Product No | Description | SNR Rating | Box Qty | Case Qty/MOQ |
|------------|----------------------------|------------|-----------|--------------|
| 67212 | Disposable earplugs corded | 31 dB | 100 Pairs | 8 Boxes |
| 13821 | Metal detectable corded | 34 dB | 100 Pairs | 8 Boxes |



H20 HEARING PROTECTION

Reusable Earplugs

- High visibility for easy compliance monitoring
- Soft design to ensure comfort and conformity
- Specific design for easier holding and donning
- Each pair individually bagged in resealable bags to maximize productivity and efficiency
- Ideal for medium-low noise environment








13822

67220

H20 HEARING PROTECTION


| Product No | Description | SNR Rating | Box Qty | Case Qty/MOQ |
|------------|----------------------------------|------------|-----------|--------------|
| 13822 | Reusable metal detectable corded | 27 dB | 100 pairs | 4 Boxes |
| 67220 | Reusable earplugs uncorded | 25 dB | 100 pairs | 4 Boxes |



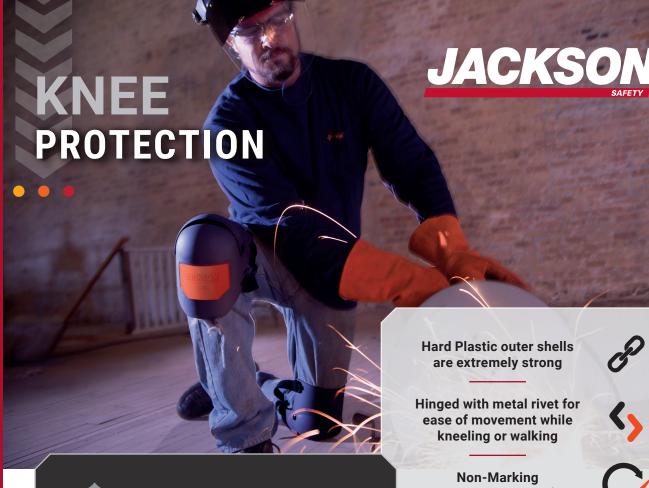



Excellent for welders, ship builders, roofers, construction workers, flooring installers and anywhere hard working Knee Pads are required.

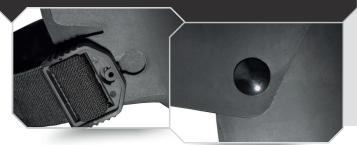

Grip-Strip on any surface



Soft elastic woven straps with reinforced sewn ends are placed well above and below the knee, will not bind behind knee



Closed cell inner foam pad offers the ultimate in comfort and protection





CE UK CE RATING: LEVEL 1



A / Eine / Une Marque / Una Marca / Un Marchio



Jackson Safety Ultra-Flex Knee Pads

- The articulating hinged design ensures proper placement all day long – set them once and forget you are even wearing them
- Soft elastic, extra-wide woven straps with reinforced sewn ends are placed well above and below the knee no Velcro, which contaminates over time
- Straps stay aligned with your legs in any position will not bind behind the knee
- Built with strong, flexible hard plastic outer shells that extend well above, below and to the inside/outside of the knee for added knee and leg protection
- Metal rivet hinge ensures long lasting protection while kneeling or walking
- On the outside, pads feature a perfectly placed curved non-marking Grip Strip
- Grip-Strip designed for use in all applications without gumming up

- On the inside, pads offer a long lasting 16 mm (5/8") closed cell foam pad for maximum comfort and protection
- Sweat does not penetrate closed cell foam lasts longer and won't "stink"
- Our Jackson Safety Ultra-Flex Gel version offers even greater user comfort and protection through the use of a three layer, 19 mm (¾") thick closed cell foam pad with built-in GEL packs - the ultimate in knee protec-
- Virtually indestructible built for years of hard work and heavy use
- Specially designed Quick-Snap clips ensure quick and easy removal
- Comes in convenient, reusable mesh bag with one extra Quick-Snap clip
- Pads weigh only 260 g (9 oz.) each







JACKSON SAFETY ULTRA-FLEX KNEE PADS

| Product No | Shell Color | Grip Strip | Case Qty/MOQ |
|------------|-------------|------------|--------------|
| 95110 | Grey | Red | 6 pairs |
| 95111 | Black | Red | 6 pairs |

Jackson Safety Ultra-Flex Gel Knee Pads

- The Jackson Safety Ultra-Flex Gel Knee Pads offers all of the same legendary features as the Jackson Safety Ultra-Flex pad but has the added advantage of a built in GEL pack for supreme comfort and fit
- This is the ultimate knee pad for extreme applications where users are on their knees for extraordinarily long periods of time
- Unlike many GEL pads on the market, our GEL packs are securely placed inside a three layer, 19 mm (34") closed cell foam knee protector compartment and are guaranteed to stay leak-free
- Available with black shells and Hi-Viz orange Grip Strip



JACKSON SAFETY ULTRA-FLEX GEL KNEE PADS

| Product No | Shell Color | Grip Strip | Case Qty/MOQ |
|------------|-------------|---------------|--------------|
| 95211 | Black | Hi-Viz Orange | 6 pairs |

127

Selstron.



Elbow pads protect the arm during a wide variety of activities, including industrial applications such as grinding or welding in tight spaces.

Lightweight, extremely flexible and cool



Pad stays in position until "you" decide to change or remove



Elbow protection cap slides up and down for personal adjustment, comfort & fit



The 11" long abrasion resistant foam and rubber body protects the arm during a wide variety of activities









A / Eine / Une Marque / Una Marca / Un Marchio



- Ultimate in elbow and arm protection
- The 11" long abrasion resistant foam & rubber body protects most of your arm
- Secures to your body with comfortable extra-wide top and bottom cinch straps
- Pull tabs help with adjustment even when wearing gloves
- Pad stays in position until "you" decide to change or remove
- Body is extremely flexible, becoming an extension of your arm
- Elbow protecting cap slides up and down for personal adjustment, comfort & fit:
 - shift cap to upper position for arm protection during belly crawl or;
 - lower position for sniper stand off your choice, your comfort
 - Tough grip cap holds your elbow in place on any surface
- Lightweight and cool only weighs 7 ounces (each pad)
- Available in black






CE EK

SELLSTROM ELBOW PADS

| Product No | Shell Color | Grip Cap | Case Qty/MOQ |
|------------|-------------|----------|--------------|
| \$96410 | Black | Black | 6 |

HEALTH SAFETY PRODUCTIVITY

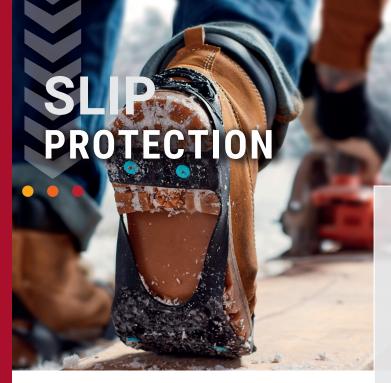





COST SAVINGS

Weather related worker injuries are the

cause of Worker's **Compensation Claims**



TRACTION PERFORMANCE

SureWerx® delivers the most comprehensive range of ice and snow traction aid products, including the original and industry leading K1 Series® mid-sole ice cleat and the Due North® brand of full foot and heel style solutions.

No matter the application, work environment, or type of footwear, we have the depth and breadth necessary to help reduce the risk of slips and falls whether you are at work or play.



End-users can prevent many injuries and save millions by providing ice traction solutions to their employees

FEATURED PRODUCTS

Browse our traction aids and ice cleats ranging from mid-sole, heel, all-purpose, heavy duty and more. All specifically designed for either industrial or recreational use. Products guaranteed to help you get a grip.

TRANSITIONAL TRACTION



ALL DAY TRACTION

Great for situations that require lots of indoor/outdoor transition such as:

Couriers/drivers

Office workers in parking lot

Homecare providers

Great for situations that require lots of all day traction such as:

Construction

Rail workers

Mailmen

For more information see our

Slip Protection Booklet or visit our website www.jacksonsafety.eu

K1 **MID-SOLE**



DUE NORTH GRIP PRO

DUE NORTH



HEEL TRACTION LIGHT INDUSTRIAL

DUE NORTH



DUE NORTH ALL PURPOSE INDUSTRIAL



DUE NORTH HEAVY DUTY







Due North® Traction Aids

GRIP PRO™ SPIKELESS

- The Due North GripPro™ Spikeless Traction Aids are designed for workers requiring traction and are frequently transitioning from outdoor to indoor surfaces or working indoors.
 - The non-spiked design is non-marring and will provide extra grip in numerous working environments.
 - 11 (22/pair) patented hi-viz chevrons are strategically placed to increase grip and reduce the risk of slips and falls.
 - Specially designed treads channel water away to deliver enhanced traction.
 - Natural rubber material with proprietary polymer blend maintains flexibility even in sub-zero temperatures.
 - Slip-On design fits snugly over boots and shoes.
 - Easy on-off pull tab provides quick adjustment
 - Can be worn while driving, climbing ladders, and walking on grates.

| Product No | Description | Case Qty/MOQ |
|---------------|-------------------------|--------------|
| V3553570-S/M | GripPro Spikeless- S/M | 24 pairs |
| V3553570-L/XL | GripPro Spikeless- L/XL | 24 pairs |



Sizes: S/M (fits: UK M 3.5-9.5, W 2.5-8.5; EURO 36-43) **L/XL** (fits: UK M 10-12.5, W 9-10.5; EURO 44-47)







WORK-LIFE WELLNESS SOLUTIONS


MEGAComfort was formed in 2002 as a result of the tremendous need to provide ergonomic solutions which will increase employee health and safety while at the same time be cost-effective.

An innovative work-life wellness company for the workplace, we provide clinically proven and field-tested footwear accessories including patented ergonomic anti-fatigue insoles and orthotics to proactively combat pain and fatigue, while concurrently increasing wearer comfort and productivity.



megacomfort.com

NEOS

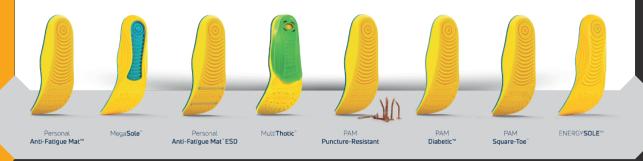

SureWerx® is expanding its brand portfolio: MEGAComfort and NEOS OVERSHOE®.

CONQUER THE TERRAIN

MAXIMUM TRACTION

ALL-WEATHER PROTECTION

NEOS, a SureWerx® brand has been a leader in overshoe products since 1994 as one of the first brands to offer a lightweight solution to providing an extra level of protection, insulation, and traction. Designed to be worn right over your everyday footwear, NEOS overshoes are versatile, easy to pack, and easy to slip on and off. NEOS are made from technically advanced materials to provide durability and performance in the most extreme conditions.



www.footwearspecialties.com/neos



VISIT OUR WEBSITE

www.jacksonsafety.eu

NEW PRODUCT ANNOUNCEMENT

SELL SHEETS

UI / DoC

HIGH RESOLUTION IMAGES

VIDEOS





| Product No | Page | Product No | Page |
|--|--------|--|------------|
| 1021 Hi-ViZ Tricot Safety Vest Orange | 119 | 14778 Protractor | 83 |
| 1022 Hi-ViZ Tricot Safety Vest Vellow/Lime | 119 | 14779 Pipe flange aligner | 84 |
| 1051 Hi-Viz Birdseye Safety T-Shirt Orange | 119 | 14780 Radius marker mini | 82 |
| 1052 Hi-Viz Birdseye Safety T-Shirt Vialinge | 119 | 14781 Radius marker small | 82 |
| 2021 Disposable Bouffant Cap | 112 | 14782 Radius marker standard | 82 |
| 2022 Disposable Shoe Covers | 112 | 14783 Radius marker jumbo | 82 |
| 2022 Disposable Since Covers 2023 Disposable Boot Covers | 113 | 14784 Circle eclipse projector | 83 |
| 2024 Disposable beard mask | 112 | 14785 Multi trammel heads | 83 |
| 2035 Disposable Polypropylene Coverall | 114 | 14786 Dial angle flange level | 84 |
| 2036 Disposable Polypropylene Lab Coat | 114 | 14766 Dial angle hange level 14795 Flange aligner base | 84 |
| 7 77 17 | 115 | 14795 Frange angher base | 84 |
| 2065 Disposable Antistatic Microporous Coverall | | | |
| 2075 FSR Disposable SMS Coverall | 116 | 14797 Dial & level | 84 |
| 2076 Disposable Microporous Coveralls - Type 4 | 117 | 14798 Centering pin | 85 |
| 13821 H10 Metal detectable corded | 125 | 14953 170-SB Headgear with 30706 clear PC window, uncoated | 93 |
| 13822 H20 Reusable metal detectable corded | 125 | 16150 Cob Headlamp 150 Lumens | 123 |
| 14200 Maxview Faceshield | 97 | 16250 Rechargeable SMD/COB Headlamp 250 Lumens | 122 |
| 14201 Maxview Faceshield anti-fog coating | 97 | 20690 Soft Hood Headgear | 35 |
| 14214 Maxview clear replacement window | 31, 97 | 20693 Replacement 370 Headgear 55, 57, 59, 63, 64, | |
| 14215 Maxview clear replacement window anti-fog | 31, 97 | 20694 370 Speed Dial Headgear - for Quad 500 | 69, 99 |
| 14220 Quad 500 Faceshield | 99 | 20695 370 Speed Dial Headgear - for Maxview/F4XP | 69, 95, 97 |
| 14230 Quad 500 Faceshield Flip Shade 5 IR | 99 | 21000 GPL500 Goggles, Blue, Clear, anti-fog | 101 |
| 14233 Quad 500 Faceshield Flip Shade 8 IR | 99 | 21001 GPL530 Goggles, Green, Shade 3 IR, anti-fog | 101 |
| 14250 Quad 500 clear window anti-fog | 33, 99 | 21002 GPL550 Goggles, Green, Shade 5 IR, anti-fog | 101 |
| 14255 Quad 500 Shade 5 visor | 33, 99 | 29057 Face Shield PC window, R type, molded, clear, V8B | 93, 95 |
| 14258 Quad 500 Shade 8 visor | 33, 99 | 29058 Face Shield PC window, R type, molded, shade 3, V8B | 93, 95 |
| 14260 F4XP Crown & 370 Speed Dial Headgear only | 95 | 29059 Face Shield PC window, R type, molded, shade 5, V8B | 93, 95 |
| 14262 F4XP Premium Face Shield (crown, headgear, window) | 95 | 29087 Face Shield PC window, B type, molded, clear | 93, 95 |
| 14531 Leather Welding Hood | 53 | 30706 Face Shield PC window, E type, stamped, clear | 93, 95 |
| 14752 Wrap-a-round 164B EX medium | 85 | 36292 Welding Curtain, orange, 1.8x1.8m | 79 |
| 14753 Wrap-a-round 176B large | 85 | 36299 Welding Curtain, green, 1.8x1.8m | 79 |
| 14754 Wrap-a-round 177B EX large 7' | 85 | 36307 Welding Curtain, orange, 1.8x2.4m | 79 |
| 14756 Wrap-a-round 179B EX large 9' | 85 | 36315 Welding Curtain, green, 1.8x2.4m | 79 |
| 14763 Wrap-a-round 164GG medium | 85 | 36335 Welding frame 6' x 4' (1.8x1.2m) | 79 |
| 14764 Wrap-a-round 176GG large | 85 | 36336 Welding frame 6' x 6' (1.8x1.8m) | 79 |
| 14766 Wrap-a-round 177GG EX large 7' | 85 | 36338 Welding frame 6' x 8' (1.8x2.4m) | 79 |
| 14767 Wrap-a-round 179GG EX large 9' | 85 | 36687 Hooks for curtains and blankets | 79 |
| 14771 Marker standard | 82 | 37198 Welding frame, adjustable 6' x 6' to 6' x 8' | 79 |
| 14772 Adaptor standard | 82 | 37606 Welding Curtain, orange, 1.8x1.2m | 79 |
| 14773 Marker jumbo | 82 | 37700 Welding Curtain, green, 1.8x1.2m | 79 |
| 14774 Adaptor jumbo | 82 | 38423 Hard Hat Interchange System (Quad 500) | 99 |
| 14775 Centering head standard | 82 | 38424 Hard Hat Interchange System (F4XP, Maxview) | 95, 97 |
| 14776 Centering head jumbo | 82 | 40040 AIRMAX+ PAPR with Translight 355 Welding Helmet | 21 |
| 14777 Pro-mag level | 83 | 40041 AIRMAX+ PAPR with Translight Flip 455 Welding Helmet | 23 |

| Product No | Page | Product No | Page |
|--|-----------|--|----------------|
| | - 12 | | |
| 40043 AIRMAX+ PAPR with Translight+ 555 Welding Helmet | 25 | 46925 Translight+ 555 External Safety Plates | 59 |
| 40070 AIRMAX+ with Soft Hood, white | 35 | 46930 Rebel Replacement Lens Kit | 51 |
| 40071 AIRMAX+ with Soft Hood, black | 35 | 46991 Translight Flip Spring Replacement Mechanism Kit | 57 |
| 40100 Translight 355 shell with Face Seal and Airduct | 21 | 46993 Translight 355 Lens retainer | 55 |
| 40101 Translight Flip 455 shell with Face Seal and Airduct | 23 | 46995 Translight+ 555 Replacement Retainer | 59 |
| 40103 Translight+ 555 shell with Face Seal and Airduct | 25 | 47001 Maxview (A/F) PAPR Complete Head Top | 31 |
| 40170 Replacement hood, white | 35 | 47020 Quad 500/Clear PAPR Complete Head Top | 33 |
| 40171 Replacement hood, black | 35 | 47030 Quad 500/Shade 5 PAPR Complete Head Top | 33 |
| 40175 Disposable soft hood | 35 | 47033 Quad 500/Shade 8 PAPR Complete Head Top | 33 |
| 40200 Translight 355 PAPR Face Seal | 21 | 47100-1 ADF - 6 FEET UNDER | 63, 74 |
| 40201 Translight Flip 455 PAPR Face Seal | 23 | 47100-4 External protective lens (114.3 x 133.35 mm) | 63, 64, 66, 67 |
| 40203 Translight+ 555 PAPR Face Seal | 25 | 47100 6 FEET UNDER, Graphic Welding Helmet | 63 |
| 40311 AIRMAX+ Pre-filters 19, 21, 23, 25, 29, 31, 33 | 3, 35, 37 | 47101-1 ADF - HELLFIRE | 64, 74 |
| 40312 AIRMAX+ Odour Removing Filter 19, 21, 23, 25, 29, 31, 33 | 3, 35, 37 | 47101-3 Internal protective lens (103.5 x 95.5 mm) | 64 |
| 40313 AIRMAX+ Spark arrestor 19, 21, 23, 25, 29, 31, 33 | 3, 35, 37 | 47101 HELLFIRE, Graphic Welding Helmet | 64 |
| 40332 HEPA PAPR filter 19, 21, 23, 25, 29, 31, 33 | 3, 35, 37 | 47102-1 ADF - GRAY MATTER | 65, 74 |
| 40340 Airmax+ FR Hose with cover, 85 cm 19, 29, 31, 33 | 3, 35, 37 | 47102 GRAY MATTER, Graphic Welding Helmet | 65 |
| 40341 AIRMAX+ FR Hose with cover, 105 cm 21, 23 | 3, 25, 37 | 47103-1 ADF - FREEDOM | 66, 74 |
| 40353 AIRMAX+ 4-Cell 7.4V Battery 19, 21, 23, 25, 29, 31, 33 | 3, 35, 37 | 47103 FREEDOM, Graphic Welding Helmet | 66 |
| 40363 AIRMAX+ PAPR charger 19, 21, 23, 25, 29, 31, 33 | 3, 35, 37 | 47104-1 ADF - REAPERS N' ROSES | 67, 74 |
| 40364 AIRMAX 5-Station Battery Charger | 38 | 47104-3 Internal protective lens (103.5 x 69.2 mm) | 67 |
| 40365 AIRMAX+ 5-Station Battery Charger | 39 | 47104 REAPERS N' ROSES, Graphic Welding Helmet | 67 |
| 40371 AIRMAX+ Waist belt 19, 21, 23, 25, 29, 31, 33 | 3, 35, 37 | 47105-1 ADF - BEAD DEAMON | 68, 74 |
| 40372 Washable belt | 35 | 47105-3 Internal protective lens (105.4 x 65.4 mm) | 63, 66, 68 |
| 40381 AIRMAX+ blower unit 19, 21, 23, 25, 29, 31, 33 | 3, 35, 37 | 47105 BEAD DEMON, Graphic Welding Helmet | 68 |
| 40391 PAPR Carrying Bag 17, 19, 21, 23 | 3, 25, 27 | 47421 280 Series PAPR Complete Head Top | 19 |
| 40421 AIRMAX+ PAPR with 280 Series Welding Helmet | 19 | 50000 Jackson SG, clear, anti-scratch | 107 |
| 40601 AIRMAX+ with Maxview anti-fog | 31 | 50001 Jackson SG, clear, anti-fog | 107 |
| 40620 AIRMAX+ with Quad 500 | 33 | 50002 Jackson SG, amber, anti-scratch | 107 |
| 40630 AIRMAX+ with Quad 500 Flip Visor Shade 5 IR | 33 | 50003 Jackson SG, amber, anti-fog | 107 |
| 40633 AIRMAX+ with Quad 500 Face Shield Flip Visor Shade 8 IR | 33 | 50004 Jackson SG, I/O, anti-scratch | 107 |
| 46200 Rebel ADF Welding Mask | 51, 74 | 50005 Jackson SG, Blue Shield, anti-scratch | 107 |
| 46230 TRANSLIGHT 355 Welding Helmet with ADF, black | 55 | 50006 Jackson SG, Smoke Mirror, anti-scratch | 107 |
| 46240 TRANSLIGHT FLIP 455 Welding Helmet with ADF, black | 57 | 50007 Jackson SG, Smoke Mirror, anti-fog | 107 |
| 46250 TRANSLIGHT+ 555 Welding Helmet with ADF, black | 59 | 50008 Jackson SG, IR 3 | 107 |
| 46432 Translight 355 Replacement ADF | 55, 74 | 50009 Jackson SG, Blue Mirror, anti-scratch | 107 |
| 46442 Translight 455 Replacement ADF | 57, 74 | 50010 Jackson SG, IR 5 | 107 |
| 46452 Translight+ 555 Replacement ADF | 59, 74 | 50040 Jackson SG, readers 1.5 | 107 |
| 46600 Rebel Replacement FR Hood | 51 | 50041 Jackson SG, readers 2.0 | 107 |
| 46640 Translight Flip 455 Face Shield Replacement Window | 57 | 50042 Jackson SG, readers 2.5 | 107 |
| 46914 Translight 455 Internal Safety Plates | 55, 57 | 50099 JACKSON Microfiber bag for Safety Glasses | 107 |
| 46915 Translight+ 555 Internal Safety Plates (Pack of 10) | 59 | 67212 H10 Disposable earplugs corded | 125 |
| 46923 Translight 355/455 External Safety Plates | 55, 57 | 67220 H20 Reusable earplugs uncorded | 125 |

| Product No | Page | Product No | Page |
|---|------|--|--------------------|
| 95110 Jackson Ultra-Flex Knee Pads, grey | 127 | J2718 Welding Blankets Fiberglass PU Coated, 2x2m | 77 |
| 95111 Jackson Ultra-Flex Knee Pads, black | 127 | J2719 Welding Blankets Fiberglass PU Coated, 2x3m | 77 |
| 95211 Jackson Ultra-Flex Gel Knee Pads, black | 127 | J2720 Welding Blankets Fiberglass PU Coated, 1x25m | 77 |
| HVS-4B-PM Fresh Air Arc Flash Hood Ventilation System | 89 | J2721 Welding Blankets Fiberglass Vermiculite, 1x1m | 77 |
| J1858 Wrap-a-round 164B EX medium | 85 | J2722 Welding Blankets Fiberglass Vermiculite, 2x1m | 77 |
| J1859 Wrap-a-round 176B large | 85 | J2723 Welding Blankets Fiberglass Vermiculite, 2x2m | 77 |
| J1860 Wrap-a-round 177B EX large 7' | 85 | J2724 Welding Blankets Fiberglass Vermiculite, 3x2m | 77 |
| J1861 Wrap-a-round 179B EX large 9' | 85 | J2725 Welding Blankets Fiberglass Vermiculite, 1x25m | 77 |
| J1867 Wrap-a-round 164GG medium | 85 | J2726 Welding Blankets Silica Uncoated, 1x1m | 77 |
| J1868 Wrap-a-round 176GG large | 85 | J2727 Welding Blankets Silica Uncoated, 1x2m | 77 |
| J1869 Wrap-a-round 177GG EX large 7' | 85 | J2728 Welding Blankets Silica Uncoated, 2x2m | 77 |
| J1870 Wrap-a-round 179GG EX large 9' | 85 | J2729 Welding Blankets Silica Uncoated, 3x2m | 77 |
| J1874 Marker standard | 82 | J2730 Welding Blankets Silica Uncoated, 1x25m | 77 |
| J1875 Adaptor standard | 82 | J2741 Magnifying Lens 1.0 Clear | 73 |
| J1877 Marker jumbo | 82 | J2743 Magnifying Lens 1.5 Clear | 73 |
| J1878 Adaptor jumbo | 82 | J2745 Magnifying Lens 2.0 Clear | 73 |
| J1879 Centering head standard | 82 | J2747 Magnifying Lens 2.5 Clear | 73 |
| J1880 Centering head jumbo | 82 | J5205 R60 Airmax Elite PAPR system | 27 |
| J1881 Pro-mag level | 83 | J5223 Airmax Elite Exchangable battery | 27 |
| J1882 Protractor | 83 | J5224 WH70 BH3 AIR PAPR for INT ADF | 27 |
| J1883 Pipe flange aligner | 84 | J5225 WH70 BH3 AIR PAPR Grand GDS | 27 |
| J1884 Radius marker mini | 82 | J5226 WH70 BH3 AIR PAPR Grand DS | 27 |
| J1885 Radius marker small | 82 | J5227 WH70 BH3 AIR PAPR Grand ES | 27 |
| J1886 Radius marker standard | 82 | J5229 WH70 BH3 AIR PAPR for EXT ADF | 27 |
| J1887 Radius marker jumbo | 82 | J5233 Concept hard hat black | 27, 61 |
| J1888 Circle eclipse projector | 83 | J5234 Hard hat adaptor set | 27, 55, 57, 59, 61 |
| J1890 Multi trammel heads | 83 | J5237 370 sweat band 21, 23, 25, 27, 31, 33, 55, 57, 59, 61, 63, | |
| J1891 Dial angle flange level | 84 | 21, 25, 25, 27, 61, 65, 65, 67, 67, 65, | , 69, 95, 97, 99 |
| J1903 Flange aligner base | 84 | J5238 WH70 Standard face seal | 27 |
| J1904 Universal level | 84 | J5241 PAPR FR Hose Cover 17, 19, 21, 23, 25, | 29, 31, 33, 35, 37 |
| J1905 Dial & level | 84 | J5243 Hard hat sweat band | 27, 61 |
| J1906 Centering pin | 85 | J5244 Face seal for Maxview and Quad 500 | 31, 33 |
| J1979 PipePro Centering head AL medium | 81 | J5250 Face Seal for 280 Series | 19 |
| J1980 PipePro Centering head AL large | 81 | J5251 F50 Visor Face Seal | 29 |
| J1981 PipePro Aluminum level | 81 | J5252 F50 Visor Lens | 29 |
| J1982 PipePro Flange Aligner Tool | 81 | J5254 Airmax Elite Comfort padded belt | 27 |
| J2711 Welding Blankets Uncoated Fiberglas, 1x1m | 77 | J5255 Airmax Elite Light flexi hose | 27 |
| J2712 Welding Blankets Uncoated Fiberglas, 1x2m | 77 | J5256 Airmax Elite Battery charger | 27 |
| J2713 Welding Blankets Uncoated Fiberglas, 2x2m | 77 | J5257 Airmax Elite Particle filters P R SL | 27 |
| J2714 Welding Blankets Uncoated Fiberglas, 3x2m | 77 | J5258 Airmax Elite Chemical filter A1 P R SL | 27 |
| J2715 Welding Blankets Uncoated Fiberglas, 1x25m | 77 | J5259 Airmax Elite Pre-filter | 27 |
| J2716 Welding Blankets Fiberglass PU Coated, 1x1m | 77 | J5260 PAPR Headgear for 280 Series | 19 |
| | 77 | | |
| J2717 Welding Blankets Fiberglass PU Coated, 1x2m | // | J5262 Airmax Elite Spark arrestor | 27 |

| Product No | Page | Product No | Page |
|---|------------|--|--------|
| J5264 Airmax Elite Chemical filter A1B1E1 P R SL + ozone | 27 | J9927 WF70 GDS ADF | 74 |
| J5462 F50 PAPR Sweat Band | 29 | J9928 WF70 ES ADF | 74 |
| J7050 AIRMAX PAPR System with Duo Welding Helmet 4/9-13 ADF | 17 | J9929 WF70 DS ADF | 74 |
| J7051 WH25 DU0 PAPR Welding Helmet with 4/9-13 ADF | 17 | J9931 Outer lens 147x125mm | 27, 61 |
| J7060 WH25 DUO PAPR Sweatband | 35, 49 | | |
| J7061 WH25 DUO PAPR Faceseal | 17, 49 | J9932 Inner lens 107.5x71.5mm | 27, 61 |
| J7062 WH25 DUO PAPR Head Gear | 49 | J9933 WH70 Flexi face seal | 27 |
| J7063 AIRMAX Welding PAPR FR Hose & Cover | 17 | J9934 WH70 Washer set | 27, 61 |
| J7064 Hose without cover, 85 cm | 35, 37 | J9935 Hose holder | 27 |
| J7065 AIRMAX Welding PAPR Motor | 17 | J9936 Mag lens holder | 27, 61 |
| J7067 AIRMAX Welding PAPR Charger | 17 | J9940 Flip front kit 110x90 mm | 27, 61 |
| J7068 AIRMAX Welding PAPR 4C Battery | 17 | J9941 Flip front kit 108x51 mm | 27, 61 |
| J7069 AIRMAX Welding PAPR Waist Belt | 17 | J9942 Leather neck protection | 27, 61 |
| J7101 WH25 DUO Welding Helmet with 4/9-13 ADF | 49 | LED_LAMP Hood Mounted L.E.D. Light | 89 |
| J7172 WH25 DUO ADF Cradle | 49 | S28311 280 Series Welding Helmet MG 10, silver - lift front | 45 |
| J7173 WH25 DUO Welding - Lens Retainer | 49 | S72000 XP410 glasses, clear, HC/AF | 109 |
| J7174 WH25 DUO Welding Head Gear Pro | 49 | S72001 XP410 glasses, smoke, HC/AF | 109 |
| J7175 WH25 DUO Sweat Band Pro | 49 | S72300 XP450 glasses, clear, HC/AF | 109 |
| J7176 WH25 DUO Front Cover Lens | 49 | S72301 XP450 glasses, smoke, HC/AF | 109 |
| J7177 WH25 DUO Inner Cover Lens | 49 | S72400 XP460 glasses, clear, HC/AF | 109 |
| J7180 DUO ADF 4/9-13 | 49, 74 | S72401 XP460 glasses, smoke, HC/AF | 109 |
| J7210 AIRMAX Welding P3 PAPR Filter | 17 | S72903 X35 glasses, shade 3 IR | 105 |
| J7260 PAPR Head Gear | 19, 29 | S72905 X35 glasses, shade 5 IR | 105 |
| J7261 F50 PAPR Face Shield | 29 | S74751 B5 glasses, shade 5 IR | 105 |
| J7265 AIRMAX+ with F50 Face Shield | 29 | S76301 Sebring glasses, black | 105 |
| J7910 WH25 DUO Weld Helm Spacer Kit | 49 | S80200 Odyssey II Series Industrial Dual Lens Goggle | 103 |
| J8049 WH20 ASPIRE Welding Helmet with WF20 4/9-13 EXT ADF | 47 | S80201 Odyssey II Series Chemical Splash Dual Lens Goggle | 103 |
| J8101 WF10 Welding Passive Filter 110x90mm Shade 9 | 73 | S80210 Odyssey II Series Shade 5 Cutting Goggle | 103 |
| J8102 WF10 Welding Passive Filter 110x90mm Shade 10 | 73 | | 103 |
| J8103 WF10 Welding Passive Filter 110x90mm Shade 11 | 73 | S80231 Odyssey II Series Clean Room Goggle | |
| J8104 WF10 Welding Passive Filter 110x90mm Shade 12 | 73 | S82510 GM510 Goggles | 104 |
| J8302 Inner lens 107x51mm | 45, 47, 53 | S96410 Sellstrom Elbow Pads | 129 |
| J8304 External/Internal protective lens 110 x 90 mm | 65, 68 | TCG6B Arc Flash Suit Kit (100 cal/cm2) | 89 |
| J8319 Outer lens 115x104mm | 47 | TCG75B Arc Flash Suit Kit (75 cal/cm2) | 89 |
| J8370 WH20 Aspire Head gear with sweatband | 47 | TCG-EU-G2-K25A4 Arc Flash Face Shield Kit, A4 (25 cal/cm2) | 88 |
| J8570 370 head gear for WH70 | 27, 61, 69 | TCG-EU-G2-K25A8 Arc Flash Face Shield Kit, A8 (25 cal/cm2) | 88 |
| J8571 PAPR 370 Headgear for Maxview | 31 | TCG-EU-G2-K25 Arc Flash Face Shield Kit (25 cal/cm2) | 88 |
| J8572 PAPR 370 Headgear for Quad 500 | 33 | TCG-EU-G2-K25WBA Arc Flash Face Shield Kit, WBA (25 cal/cm2) | 88 |
| J9912 WH70 Replacement shell for INT ADF | 61 | TCG-EU-G2-KA4 Arc Flash Face Shield Kit, A4 (17 cal/cm2) | 88 |
| J9913 WH70 Replacement shell for EXT ADF | 61 | TCG-EU-G2-KA8 Arc Flash Face Shield Kit, A8 (17 cal/cm2) | 88 |
| J9914 WH70 Welding Helmet with Grand DS ADF | 61 | TCG-EU-G2-K Arc Flash Face Shield Kit (17 cal/cm2) | 88 |
| J9915 WH70 Welding Helmet with Grand ES ADF | 61 | TCG-EU-G2-KWBA Arc Flash Face Shield Kit, WBA (17 cal/cm2) | 88 |
| J9916 WH70 Welding Helmet with Grand GDS ADF | 61 | V3553570 DueNorth GripPro Traction Aids | 131 |

WARRANTY TABLE

At Surewerx, servicing our customers is our #1 Priority. This is why we have put together one of the most comprehensive and user-friendly Warranty Programs in the industry. Simply, we stand by our products and craftsmanship behind them.

In the event our end users are experiencing difficulties with our products, we recommend completing all of the trouble shooting options first, before we diagnose and complete the warranty process.

Common Issues with Welding Helmets Not Working

Scenario 1: Problems after end user changes environments *Solution*: Adjust Delay/Sensitivity Setting on the Helmet.

Note: BH3 models work differently than our other ADFs, in that you turn sensitivity all the way up before adjusting, whereas other helmets start

Scenario 2: Helmet Sensors are not functioning properly *Solution*: Check sensors, clear from any slag or debris. Also make sure you are welding in an unhindered environment

Scenario 3: Auto-darkening slow or not working properly *Solution:* Check and replace batteries

Scenario 4: Filter not darkening properly, and there are issues with visibility, or spatter

Solution: Change external and internal safety plate

Scenario 5: Filter remains dark after completing a weld

Solution: Ambient light is too bright and user needs to adjust delay

Scenario 6: Helmet is giving off light flashes

Solution: Typically caused from low batteries. Try to replace batteries, and for the solar components, this occasionally happens when stored in a dark environment. Place helmet outdoors facing sunlight to recharge, and try to store in a brighter environment.

If the end user has been unsuccessful trouble shooting, they should contact the distributor/company they purchased from for warranty claim assistance before contacting Surewerx directly.

Surewerx honors warranty claims on welding helmets listed in the event of a defect within the warranty coverage time frame.

Warranty coverage begins from the date of purchase for the end user.

If unable to resolve with your distributor/company product was purchased from, customer may email our customer service team **sales@jacksonsafety.eu**, with the following:

Completed Surewerx Warranty Claim Form Attached Proof of Purchase

We want to make sure all attempts at troubleshooting have been used before conducting the claim process.

Once claim has been submitted, and product is determined to be defective under warranty, a replacement part or unit will be sent.

We ask that you send the defective product here for further evaluation:

Balder, Ltd.

Teslova ulica 30 SI-1000 Ljubljana

Slovenia

If you have further questions, you may reach out to customer service at:

+386 1 477 67 84

| Product | Years |
|-------------------------|-------|
| ADFs | |
| Duo ADF | 1 |
| Translight 355 ADF | 3 |
| Translight 455 ADF | 3 |
| Translight 555 ADF | 3 |
| Rebel ADF | 2 |
| WF20 ES ADF | 1 |
| WF70 DS 4/9-13 ADF | 3 |
| WF70 ES 4/9-13 ADF | 3 |
| WF70 GDS 4/6-8/9-13 ADF | 3 |
| Graphic Helmets ADFs | 2 |

WELDING HELMETS

PAPR SYSTEMS

| AIRMAX | |
|--------------|-----|
| Blower Unit | 1,5 |
| Battery | 1 |
| AIRMAX+ | |
| Blower Unit | 1,5 |
| Battery | 1 |
| AIRMAX ELITE | |
| Blower Unit | 1,5 |
| Battery | 1 |
| PPE | |
| PPF | |

STANDARD TERMS & CONDITIONS OF SALE

JACKSON SAFETY EUROPE & UK

1. General

"Jackson Safety", "JS", "we", "us": **either** SureWerx UK Ltd., a limited liability company registered in UK with a registered office located at Suite 1, 7th Floor, 50 Broadway, London, UK, SW1H 0BL for trading relationships with customers located on the UK mainland **or** Balder Ltd a limited liability company registered in Slovenia with a registered office located at Teslova ulica 30, 1000 Ljubljana, Slovenia, for all other trading relationships.

"Buyer": The legal entity to whom we supply goods (collectively "Products") of any kind. Except insofar as otherwise explicitly agreed in writing between Jackson Safety and the Buyer, these Standard Terms & Conditions (the "Conditions") will apply to all transactions between JS and the Buyer, whether this is done in writing, via the internet, electronically or verbally (each a "Contract").

2. Shipment agreements

- **2.1** An agreement with JS to supply Products is only established when JS has confirmed in writing a Buyer purchase order within 8 days following its receipt. Any amendments must be confirmed in writing by JS.
- **2.2** Any purchase order not confirmed in writing by JS shall be null and void.

3. Terms of delivery and transportation

3.1 The method of transport shall be determined by JS if not specified by the Buyer. For certain destinations JS may require the buyer to arrange their own transportation on an ex-works basis, JS will make the Buyer aware of this in advance of any order being agreed. Any specific requirements of the Buyer on the transport and shipment will only be performed if the Buyer has declared that it will bear the additional costs.

4. Time of delivery

4.1 The periods stated for delivery are not binding and are only target dates. Failure to meet the requested time of delivery does not in any event, provide grounds for the cancellation of an order or agreement, nor does it entitle the Buyer to any kind of compensation. We explicitly reserve the right to deliver by instalments, each of which will qualify as partial sale. The delivery of an order by instalments cannot in any event justify the refusal to pay for the Products supplied. Any liability on the part of JS for failure or delay in delivery is hereby excluded.

5. Liability

- **5.1** In the event that the Products supplied are damaged or incomplete, or in the event of any error, missing piece or any other type of irregularity, the Buyer is obliged to refuse the Products on delivery or to only accept them subject to a written reservation. Every complaint relating to the Products as delivered must be sent to us in writing within 5 working days as from the receipt, with a reference to the bill of lading. After that period, the Products will be deemed to have been finally accepted by the Buyer. No goods may be returned without prior written permission from JS. Such permission will not in any way imply that the Products have been acknowledged by JS as being damaged. Goods being returned, in whatever way they are being sent, remain at the Buyer's risk and will be sent to our warehouse, carriage free.
- **5.2** JS shall not be liable for or responsible for any defect or other claim which arises from (i) normal wear and tear, misuse, negligence, accident, abuse, use not in accordance with standards of proper practice or normal usage conditions set out in the catalogues, manuals or handbooks supplied by JS, modification or alteration not authorized in writing by JS, or use in conjunction with a third party product, or (ii) Buyer's negligence, or (iii) the breach of Buyer's obligations under this Agreement.

6. Delivery and risks

6.1 Where goods travel on an ex works basis delivery is regarded as being complete on the moment of departure from our warehouse

loading dock. It is the Buyer's responsibility to ensure adequate insurance is in place to cover the transit risk. The risk of loss, damage or destruction of the goods to be supplied by JS is borne by the Buyer from the moment that these goods are collected in accordance with this article.

6.2 Where JS arranges the transportation it is the Buyers responsibility to ensure that the goods are inspected upon receipt and that JS are notified of any shortages or damages within 24 hours, together with supporting photographic evidence. JS will not accept liability to make good any missing or damaged product if this is not the case.

7. Force majeure and hardship

7.1 All delivery and other obligations of JS will be suspended in the event of force majeure. In such cases, JS is only obliged to deliver or perform its obligations to the extent possible. 'Force majeure' includes the following, although this is not an exhaustive list: war, mobilization of troops, embargo, partial or complete strike, lock-out, riot, epidemics, natural disasters, import and export restrictions, machinery failure, staff sickness, fire, explosion, accidents of any kind and any cause hampering the normal supply by our suppliers of raw materials, fuels and inventory for our normal production, transportation or dispatch, as well as all similar circumstances affecting JS, its subcontractors or suppliers.

8. Re-sale

8.1 The Buyer may only re-sell the Products in their original packaging, without modification.

9. Payments

- **9.1** All amounts due to JS are payable within 30 days as from the invoice date, without discount, deduction or offset.
- **9.2** JS retains legal title to all Products until settlement has been received in full for the associated Sales Invoice. In the event of non-payment or insolvency JS, or its agents, reserve the right to enter the Buyers premises, without notice, to recover the Products.

10. Compliance with Laws

10.1 Buyer shall comply with all laws and regulations applicable to the storage, use, handling, installation, registration and labelling of all Products as from their delivery and the disposal of all wastes and residues (including packaging) resulting from your use of the Products.

11. Privacy

11.1 Buyer agrees that JS and entities related with it may collect, store and use Buyer data, including personal data, for the purpose of facilitating its marketing and sale of the Products, and Buyer hereby consents to such collection, storage and use of Buyer data by JS and entities related with it for these purposes.

12. Miscellaneous

- **12.1** Any provision in these Conditions which is void or inapplicable shall have no effect on the validity of the other provisions. Any invalid clause will be replaced by another one that is appropriate.
- **12.2** JS may carry out its obligations under the Contract through any agents or sub-contractors appointed by it in its absolute discretion.

13. Applicable law

13.1 All Contracts relating to UK mainland trading relationships are deemed executed with SureWerx UK Ltd at the registered office of JS in the UK and are governed by the laws of England and Wales, all other trading relationships are deemed executed with Balder Ltd at the registered office of JS in Slovenia and are governed by Slovenian law. Any dispute concerning the interpretation, implementation and cancellation of the present agreement which cannot be settled amicably will be resolved exclusively by the Courts of England or Slovenia as appropriate. JS may also introduce any proceedings before the courts of the residence of a debtor. The Vienna Sales Convention does not apply.

JACKSON® SAFETY

sellstrom_®







CURV-0-MARK®





MEGA COMFORT



www.jacksonsafety.eu www.surewerx.com







Follow us on Social Media
SureWerx Europe

USA: SureWerx USA Inc. 325 Corporate Drive, Elgin, IL, USA 60123 surewerx.com/usa Canada: SureWerx, 49 Schooner St., Coquitlam, BC V3K 0B3 surewerx.com/ca Europe: Balder d.o.o.
Teslova ulica 30,
SI-1000 Ljubljana, Slovenia
jacksonsafety.eu

UK: SureWerx UK Ltd.
Suite 1, 7th Floor, 50 Broadway,
London, SW1H 0BL, UK
jacksonsafety.eu

SureWerx®



Price 20€ J2021-1 EN 01-2024